



LEDestá

premium lighting

Architectural Lighting
Direct/Indirect Lighting
Office & Administrative Lighting
Metal Ceiling Luminaire
Surface Mounted Luminaire
Free Standing Luminaire

Product Catalog 2020


LED Panel Light for different ceilings




P8 [LED Panel for Gypsum Board Ceiling](#)

P9 [LED Panel for Metal Ceiling](#)


LED Architectural Lighting

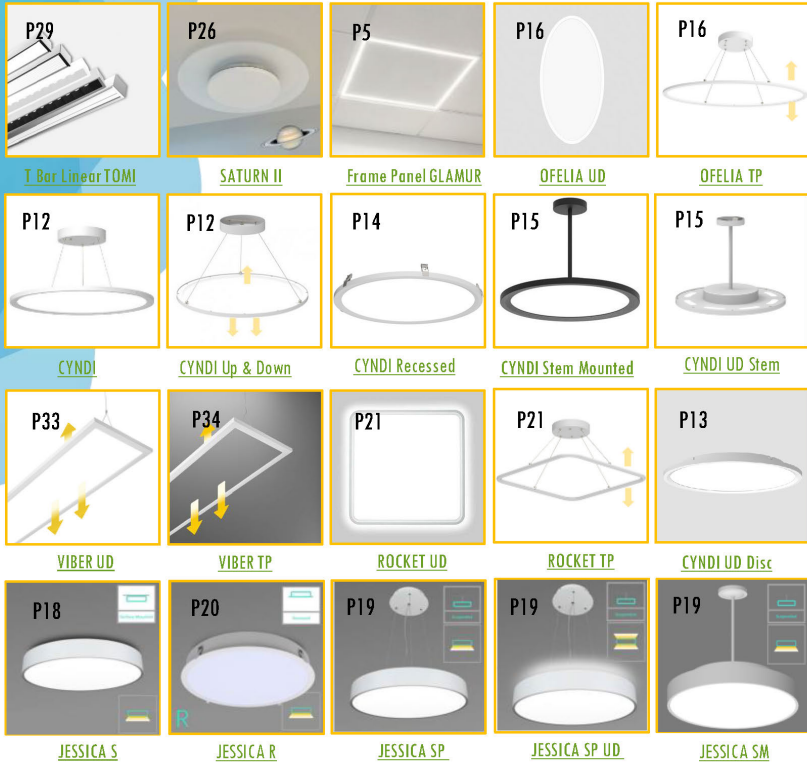

LED Surface Mounted Luminaire

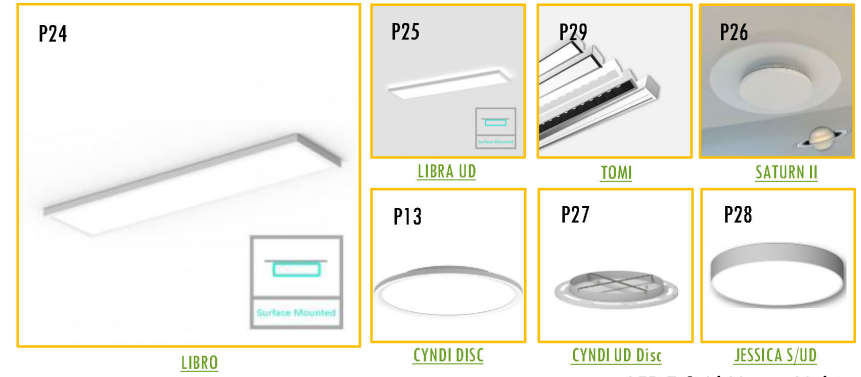


LED T Grid Linear Light

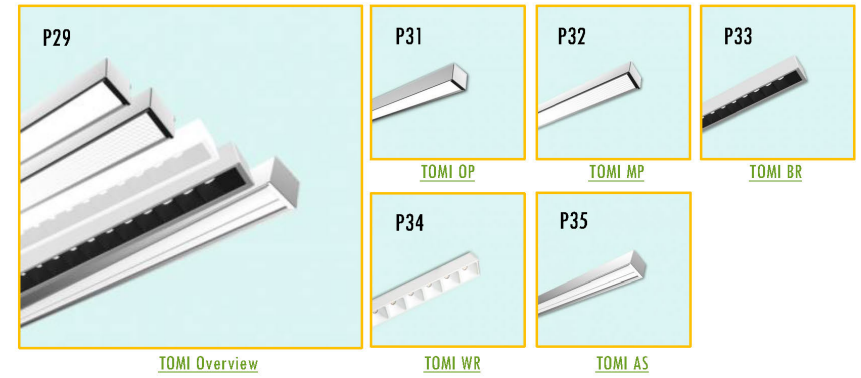


Free Standing and Desktop Lamp





Backlite LED Panel Light for Lay-On ceiling


- For T15/T24 Lay-On ceiling
- LED backlight technology, EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá Backlite LED panel for Lay-On ceiling, non-yellowing lens & FF driver. COI<3.3 compliant, daylight and motion sensor by smart control, tunable white and RGBW optional.

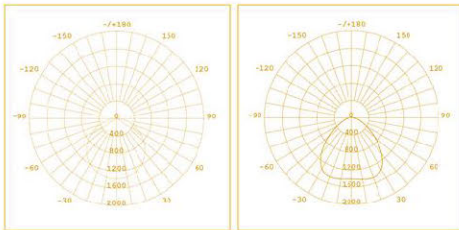

■ LEDestá BACKLITE LED Panel Light for T15/T24 LAY-ON Ceilings




Model	Dimension	Product No.	Power	Luminous Flux	Efficiency @ 4000K
600 x 600	595 x 595 x 30mm	PLB30/060P	30W	3750lm	125lm/W
		PLB35/060P	35W	4375lm	125lm/W
		PLB40/060E	40W	4000lm	100lm/W
625 x 625	620 x 620 x 30mm	PLB30/062P	30W	3750lm	125lm/W
		PLB35/062P	35W	4375lm	125lm/W
		PLB40/062E	40W	4000lm	100lm/W
300 x 1200	295 x 1195 x 30mm	PLB30/312P	30W	3750lm	125lm/W
		PLB35/312P	35W	4375lm	125lm/W
		PLB40/312E	40W	4000lm	100lm/W
600 x 1200	595 x 1195 x 30mm	PLB45/612P	45W	5625lm	125lm/W
		PLB60/612E	60W	6000lm	100lm/W




Side for Lay-On ceiling

- For T15/T24 Lay-On ceiling
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá Side LED panel for Lay-On ceiling, with PMMA LGP & FF driver, 5 years warranty and a wide range with more than 20 standard sizes, customized oriented.

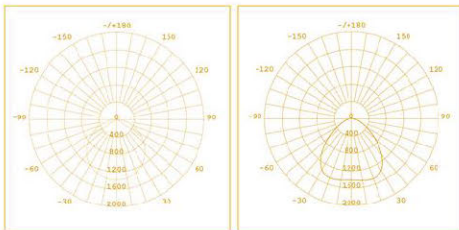

LEDestá SIDE LED Panel Light for T15/T24 LAY-ON Ceilings

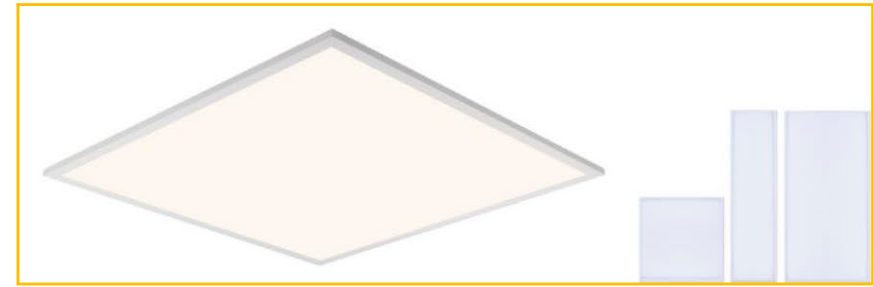


Model	Part No.	Power	Luminous Flux	Dimension (mm)
184x1231	PLS22/213	22 W	2500 lm	184x1231x10
190x1250	PLS30/212	30 W	3600 lm	185x1245x10
190x1300	PLS30/213	30 W	3600 lm	185x1295x10
190x1500	PLS35/215	35 W	4200 lm	185x1495x10
300x300	PLS15/030	15 W	1800 lm	295x295x10
300x600	PLS20/306	20 W	2400 lm	295x595x10
300x1200	PLS30/312	30 W	3600 lm	295x1195x10
300x1500	PLS35/315	35 W	4200 lm	295x1495x10
300x1800	PLS45/318	45 W	5400 lm	295x1795x10
310x1547	PLS40/316	40 W	5000lm	310x1547x10
312.5x1250	PLS30/313G	30W	3600 lm	308x1245x10
312.5x1500	PLS35/315G	35 W	4200 lm	308x1495x10
312.5x1800	PLS45/318G	45 W	5400 lm	308x1795x10
400x1200	PLS30/412	30W	3600 lm	395x1195x10
400x1250	PLS30/413	30W	3600 lm	395x1245x10
400x1500	PLS35/415	35 W	4200 lm	395x1495x10
400x1800	PLS45/418	45 W	5400 lm	395x1795x10
500x500	PLS30/050	30 W	3600 lm	495x495x10
600x600	PLS30/060	30 W	3600 lm	595x595x10
600x1200	PLS50/612	50 W	6000 lm	595x1195x10
625x625	PLS30/062	30 W	3600 lm	620x620x10
625x1250	PLS50/613	50W	6000 lm	620x1245x10
750x750	PLS50/075	50 W	6000 lm	745x745x10



GLAMUR Frame Panel for Lay-On ceiling


- Perfectly recessed into the T15/T24 Lay-On ceilings easily and fast
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description : The LEDestá™ LED Frame Lights can be perfectly recessed into the T15/T24 Lay-On ceilings easily and fast, no need any modifications for the ceiling or tile.

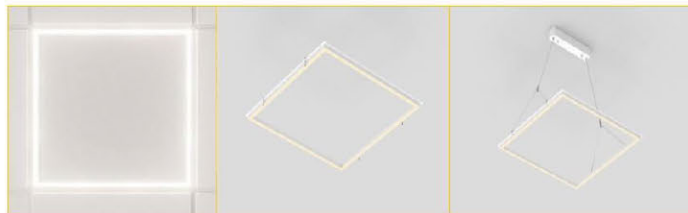

Lay-On (Recessed)


Surface Mounted

Suspension



Lay-On Ceiling | GLAMUR

■ LEDestá GLAMUR LED Frame Panel Light for T15/T24 LAY-ON Ceilings

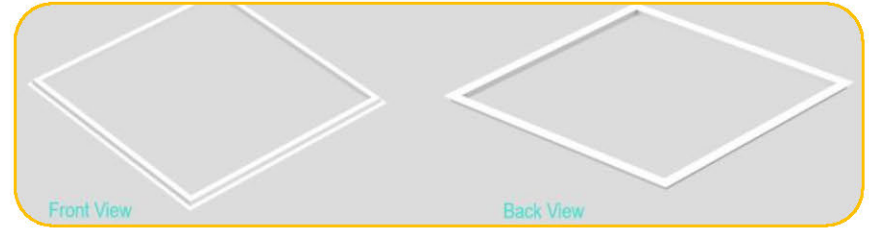

T bar Width	Model	Part No.	Power	Luminous Flux	Dimension (mm)	Inner Size (mm)
T24	300x1200	PLF30/312F	30 W	3600 lm	295x1195x16	274x1174
	600x600	PLF30/060F	30 W	3600 lm	595x595x16	574x574
	600x1200	PLF40/612F	40 W	4800 lm	595x1195x16	574x1174
	625x625	PLF30/062F	30W	3600 lm	620x620x16	599x599
T15	625x1250	PLF40/613F	40 W	4800 lm	620x1245x16	599x1224
	300x1200	PLF30/312V	30 W	3600 lm	295x1195x16	284x1184
	600x600	PLF30/060V	30 W	3600 lm	595x595x16	584x584
	600x1200	PLF40/612V	40 W	4800 lm	595x1195x16	584x1184
	625x625	PLF30/062V	30 W	3600 lm	620x620x16	609x609
	625x1250	PLF40/613V	40 W	4800 lm	620x1245x16	609x1234


LED Panel For Different Ceilings





Slender Frame LED PANEL for Lay-On Ceiling



- 4mm narrow frame design, frames of Panel Light are completely hidden under the T grid after installation
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED panel lights Slender Frame series has been designed for the high-class premium projects, which requires the frames of panel lights are invisible after installation.

The LEDestá™ LED panel lights Slender Frame series has been designed for the high-class premium projects, which requires the frames of panel lights are invisible after installation. These luminaires fit into the Lay-On ceiling systems perfectly, the 4mm width slender frames are completely hidden under the T grid after installation, making the whole ceiling system uniform and elegant.

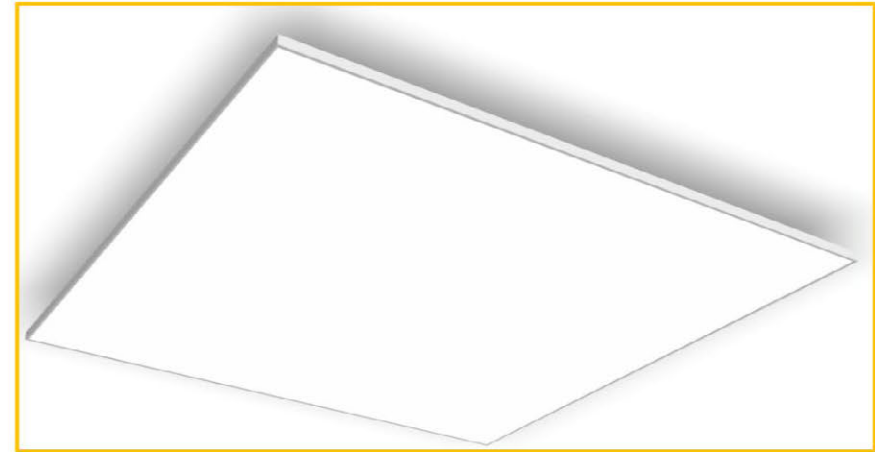

Model	Part No.	Power	Luminous Flux	Dimension (mm)
300x1200	PLS30/312N	30 W	3600 lm	295x1195x15
500x500	PLS30/050N	30 W	3600 lm	495x495x15
600x600	PLS30/060N	30 W	3600 lm	595x595x15
600x1200	PLS50/612N	50 W	6000 lm	595x1195x15
625x625	PLS30/062N	30 W	3600 lm	620x620x15
750x750	PLS50/075N	50 W	6000 lm	745x745x15

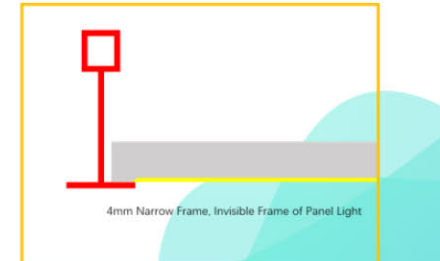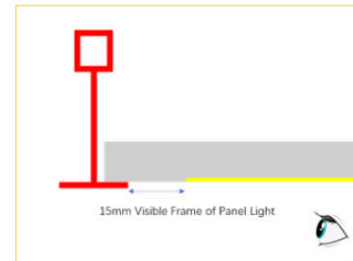




Lay-In Ceiling


- Specifically designed for Lay-In, also called SASI30 ceilings.
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED panel light for Lay-In ceilings for SASI30, Armstrong Tegular, Rockfon Lay-In, FURAL KQV3, Knauf AMF System C/VT, Linder LMD-K400, OWA S3a/S15a/S6b/S15b, Gradhermetic Semivista..

The LEDestá™ LED panel lights LayIn130 series has been designed specifically for seamlessly integrated with premium Lay-In, also called SASI30 or Tegular/Alugrid/Drop ceiling systems. These luminaires fit into the Lay-In ceiling systems perfectly and flush with the other ceiling tiles, making the whole ceiling system uniform and elegant. Moreover, besides the normal width frame, LEDestá also has the options for Narrow Frame (4mm width) and Frameless designs for customers' different preferences.



Lay-In Ceiling

■ LEDestá LayIn130 LED Panel Light for T15/T24 LAY-IN Ceilings

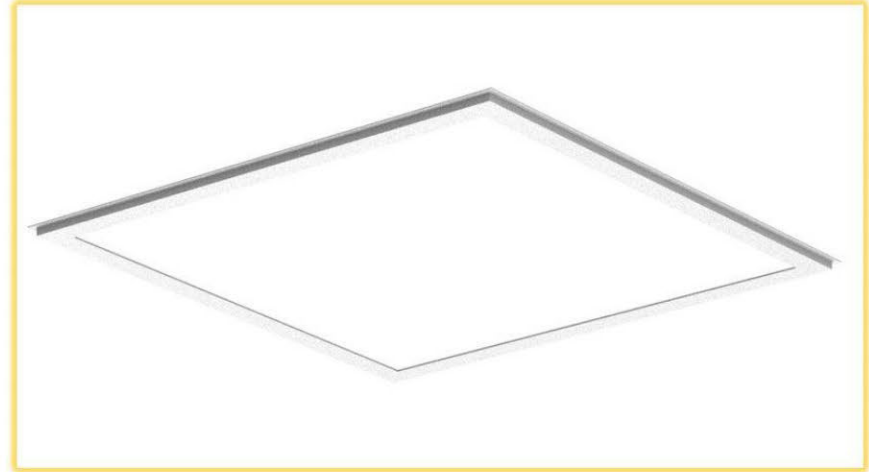


T bar Width	Model	Part No.	Power	Luminous Flux	Dimension (mm)
T15	500x500	PLS30/050L-T15	30 W	3600 lm	484x484
	600x600	PLS30/060L-T15	30 W	3600 lm	584x584
	625x625	PLS30/062L-T15	30 W	3600 lm	609x609
	750x750	PLS50/075L-T15	50 W	6000 lm	734x734
T24	500x500	PLS30/050L-T24	30 W	3600 lm	474x474
	600x600	PLS30/060L-T24	30 W	3600 lm	574x574
	625x625	PLS30/062L-T24	30 W	3600 lm	599x599
	750x750	PLS50/075L-T24	50 W	6000 lm	724x724

LED Panel For Different Ceilings



Gypsum Board Ceiling

- Recessed frame design for plasterboard recessed installation
- EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description : The LEDestá™ LED panel lights Recessed Frame series has been designed for the gypsum board/plasterboard/Cut-Out/prepared aperture ceilings.

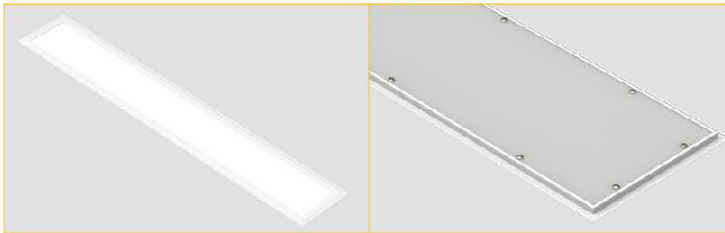


■ LEDestá RF Recessed Frame LED Panel Light for GYPSUM Board Ceilings



Part No.	Power	Luminous Flux	Dimension (mm)	Cut-Out size (mm)	Efficiency
PLS30/111R	30W	3600lm	150x1150x10	135x1135	120lm/W
PLS30/112R	30W	3600lm	184x1231x10	169x1216	120lm/W
PLS30/212R	30W	3600lm	185x1245x10	170x1230	120lm/W
PLS30/213R	30W	3600lm	185x1295x10	170x1280	120lm/W
PLS35/215R	35W	4200lm	185x1495x10	170x1480	120lm/W
PLS30/312R	30W	3600lm	295x1195x10	280x1180	120lm/W
PLS30/313R	30W	3600lm	308x1245x10	293x1230	120lm/W
PLS35/316R	35W	4200lm	310x1547x10	295x1532	120lm/W
PLS30/050R	30W	3600lm	495x495x10	480x480	120lm/W
PLS30/060R	30W	3600lm	595x595x10	580x580	120lm/W
PLS30/062R	30W	3600lm	620x620x10	605x605	120lm/W





Metal Ceiling
Hook-In Concealed Ceiling

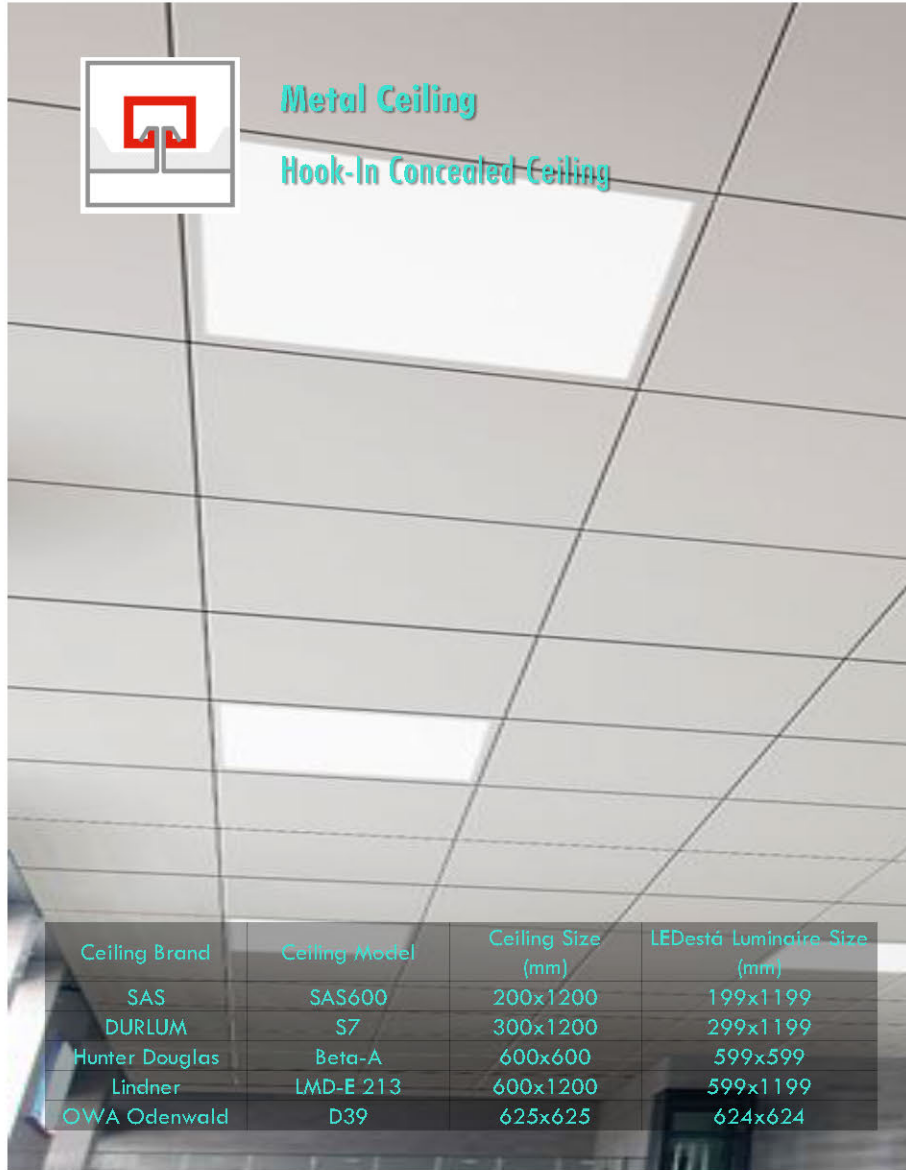


Ceiling Brand	Ceiling Model	Ceiling Size (mm)	LEDestá Luminaire Size (mm)
SAS	SAS600	200x1200	199x1199
DURLUM	S7	300x1200	299x1199
Hunter Douglas	Beta-A	600x600	599x599
Lindner	LMD-E 213	600x1200	599x1199
OWA Odenwald	D39	625x625	624x624

Metal Ceiling

Double Hook/H HANG-IN Concealed Ceiling

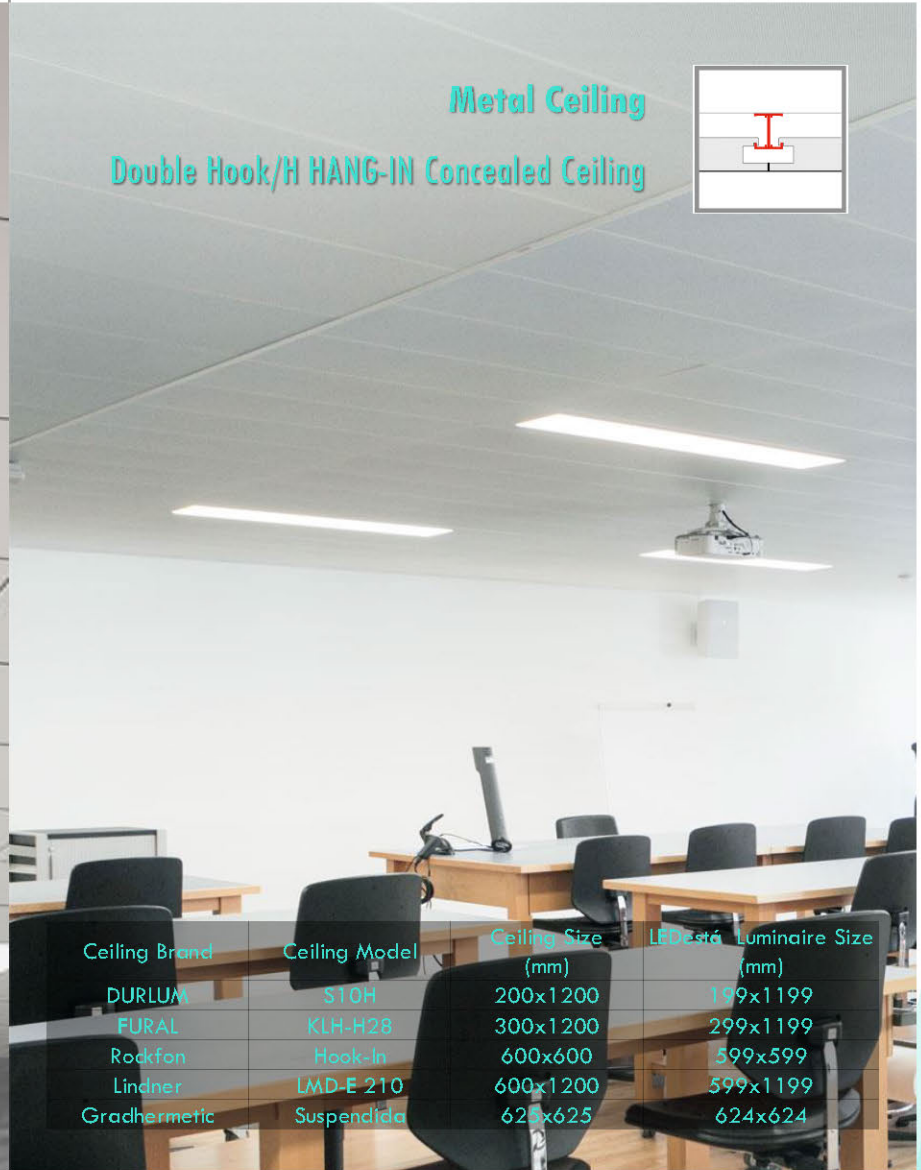

Ceiling Brand	Ceiling Model	Ceiling Size (mm)	LEDestá Luminaire Size (mm)
DURLUM	S10H	200x1200	199x1199
FURAL	KLH-H28	300x1200	299x1199
Rockfon	Hook-In	600x600	599x599
Lindner	LMD-E 210	600x1200	599x1199
Gradhermetic	Suspendida	625x625	624x624



LED Architectural Lighting





Cyndi

- One family with uniform aluminum profile and diameter from 40cm to 120cm
- Same panel by suspended, stem mounted, surface mounted, and recessed just with different accessories
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED round panel light family in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm; suspended, stem mounted, surface mounted, and recessed achievable. Ra>97 optional for medical lighting.



CYNDI Series LED Round Panel Light



preassembled wires for tidy and quick suspending



durable stem mounting



recess with strong clips



one surface mounted disc for more panel sizes


1 panel, 4 mounting ways.

Model	Product Dimension	Item No.	Luminous Flux	System Power	Efficiency @ 4000K
D40	∅400*20mm	PLR28/D40	2940lm	28W	105lm/W
D50	∅500*20mm	PLR32/D50	3360lm	32W	105lm/W
D60	∅600*20mm	PLR40/D60	4800lm	40W	120lm/W
D80	∅780*20mm	PLR55/D80	6600lm	55W	120lm/W
D100	∅1000*20mm	PLR75/D100	9000lm	75W	120lm/W
D120	∅1200*20mm	PLR85/D120	10200lm	85W	120lm/W




Cyndi Suspended


- Suspended with tidy wires at any desired height
- Down light only or both direct and indirect light, diameter from 40cm to 120cm
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description : LEDestá LED round panel family suspended; direct light only or direct and indirect light optional, in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm.



down light only
Down



up & down opalic
UD Up/Down



up & down transparent
TP Transparent

■ CYNDI Suspended - Down | Up/Down | Transparent



Model	Product Dimension	Item No.	Luminous Flux	System Power
D40	∅400*20mm	PLR28/D40	2940lm	28W
D50	∅500*20mm	PLR32/D50	3360lm	32W
D60	∅600*20mm	PLR40/D60	4800lm	40W
D80	∅780*20mm	PLR55/D80	6600lm	55W
D100	∅1000*20mm	PLR75/D100	9000lm	75W
D120	∅1200*20mm	PLR85/D120	10200lm	85W
Up & Down D40	∅400*20mm	PLR28/D40-UD	2940lm	28W
Up & Down D50	∅500*20mm	PLR32/D50-UD	3360lm	32W
Up & Down D60	∅600*20mm	PLR40/D60-UD	4800lm	40W
Up & Down D80	∅780*20mm	PLR55/D80-UD	6600lm	55W
Up & Down D100	∅1000*20mm	PLR75/D100-UD	9000lm	75W
Up & Down D120	∅1200*20mm	PLR85/D120-UD	10200lm	85W
Transparent D40	∅400*20mm	PLR28/D40-TP	2940lm	28W
Transparent D50	∅500*20mm	PLR32/D50-TP	3360lm	32W
Transparent D60	∅600*20mm	PLR40/D60-TP	4800lm	40W
Transparent D80	∅780*20mm	PLR55/D80-TP	6600lm	55W
Transparent D100	∅1000*20mm	PLR75/D100-TP	9000lm	75W
Transparent D120	∅1200*20mm	PLR85/D120-TP	10200lm	85W




Cyndi Surface Mounted

- Easy surface mounted for any ceilings including concrete ceiling
- Down light only or both direct and indirect light, diameter from 40cm to 120cm
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED round panel light family by surface mounted; direct light only or direct and indirect light optional, in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm.



CYNDI | Surface Mounted

■ CYNDI Surface Mounted - Down | Up/Down

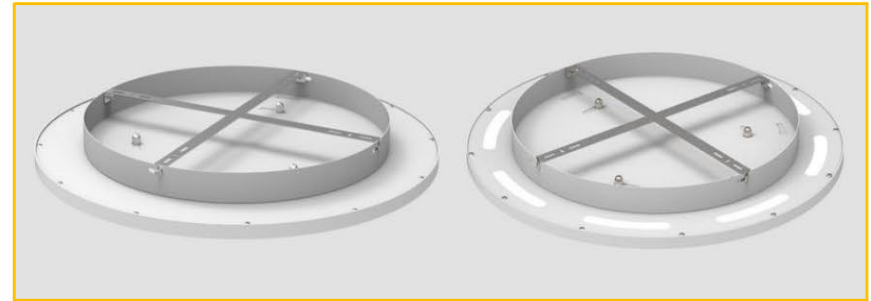


Model	Product Dimension	Item No.	Luminous Flux	System Power	Efficiency @ 4000K
D40	∅400*20mm	PLR28/D40 D	2940lm	28W	105lm/W
D50	∅500*20mm	PLR32/D50 D	3360lm	32W	105lm/W
D60	∅600*20mm	PLR40/D60 D	4800lm	40W	120lm/W
D80	∅780*20mm	PLR55/D80 D	6600lm	55W	120lm/W
D100	∅1000*20mm	PLR75/D100 D	9000lm	75W	120lm/W
D120	∅1200*20mm	PLR85/D120 D	10200lm	85W	120lm/W
D40 UD	∅400*20mm	PLR28/D40-UD D	2940lm	28W	105lm/W
D50 UD	∅500*20mm	PLR32/D50-UD D	3360lm	32W	105lm/W
D60 UD	∅600*20mm	PLR40/D60-UD D	4800lm	40W	120lm/W
D80 UD	∅780*20mm	PLR55/D80-UD D	6600lm	55W	120lm/W
D100 UD	∅1000*20mm	PLR75/D100-UD D	9000lm	75W	120lm/W
D120 UD	∅1200*20mm	PLR85/D120-UD D	10200lm	85W	120lm/W




Cyndi Recessed

- Recessed with strong clips for cutout installation
- Down light only, round panel diameter from 40cm to 120cm
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED round panel light family by recessed; direct light only, in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm, finishing white, black etc.,

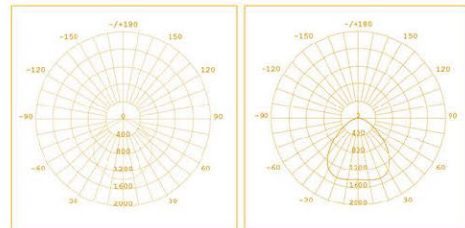

■ **CYNDI Recessed**

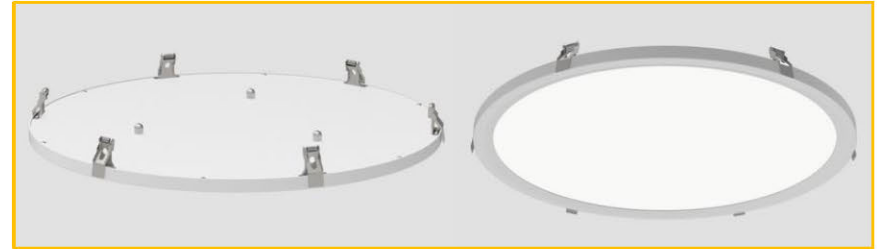

Model	Product Dimension	Item No.	Luminous Flux	System Power	Efficiency @ 4000K
D40	∅400*20mm	PLR28/D40 R	2940lm	28W	105lm/W
D50	∅500*20mm	PLR32/D50 R	3360lm	32W	105lm/W
D60	∅600*20mm	PLR40/D60 R	4800lm	40W	120lm/W
D80	∅780*20mm	PLR55/D80 R	6600lm	55W	120lm/W
D100	∅1000*20mm	PLR75/D100 R	9000lm	75W	120lm/W
D120	∅1200*20mm	PLR85/D120 R	10200lm	85W	120lm/W



■ CYNDI Stem Mounting




Model	Product Dimension	Item No.	Luminous Flux	System Power
D40	∅400*20mm	PLR28/D40 ST	2940lm	28W
D50	∅500*20mm	PLR32/D50 ST	3360lm	32W
D60	∅600*20mm	PLR40/D60 ST	4800lm	40W
D80	∅780*20mm	PLR55/D80 ST	6600lm	55W
D100	∅1000*20mm	PLR75/D100 ST	9000lm	75W
D120	∅1200*20mm	PLR85/D120 ST	10200lm	85W
D40 UD	∅400*20mm	PLR28/D40-UD ST	2940lm	28W
D50 UD	∅500*20mm	PLR32/D50-UD ST	3360lm	32W
D60 UD	∅600*20mm	PLR40/D60-UD ST	4800lm	40W
D80 UD	∅780*20mm	PLR55/D80-UD ST	6600lm	55W
D100 UD	∅1000*20mm	PLR75/D100-UD ST	9000lm	75W
D120 UD	∅1200*20mm	PLR85/D120-UD ST	10200lm	85W




Cyndi Stem Mounted

- Durable stem mounted for high traffic location
- Down light only or both direct and indirect light, diameter from 40cm to 120cm
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED round panel family by stem mounted; direct light only or direct and indirect light optional, in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm.

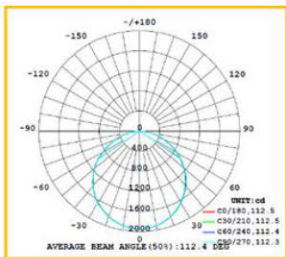

down light only

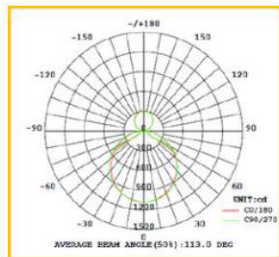


up & down

■ OFELIA Oval Shape LED Panel Light — Down | Up/Down | Transparent




Ofelia


- Down light version, Direct and indirect light with Opalic diffuser/Transparent, non-yellowing PMMA light guide
- 120lm/W, LED panel light oval shaped
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED panel light Ofelia UD family for direct and indirect light by suspended installation, 120lm/W, oval shaped, non-yellowing PMMA LGP.



Down






UD Up/Down




TP Transparent

Model	Part No.	Power	Luminous Flux	Dimension(mm)
400x800	PLR40/048	40W	4800 lm	400x400x12
500x1000	PLR50/051	50W	6000 lm	500x1000x12
400x800	PLR40/048-UD	40W	1440lm↑ 3360lm↓	400x400x12
500x1000	PLR50/051-UD	50W	1800lm↑ 4200lm↓	500x1000x12
400x800	PLR40/048-TP	40W	2400lm↑ 2400lm↓	400x400x12
500x1000	PLR50/051-TP	50W	3000lm↑ 3000lm↓	500x1000x12

Round LED Panel
Lights
Jessica
for
Recessed
Surface Mounted
Suspended
Stem Mounting
Installation

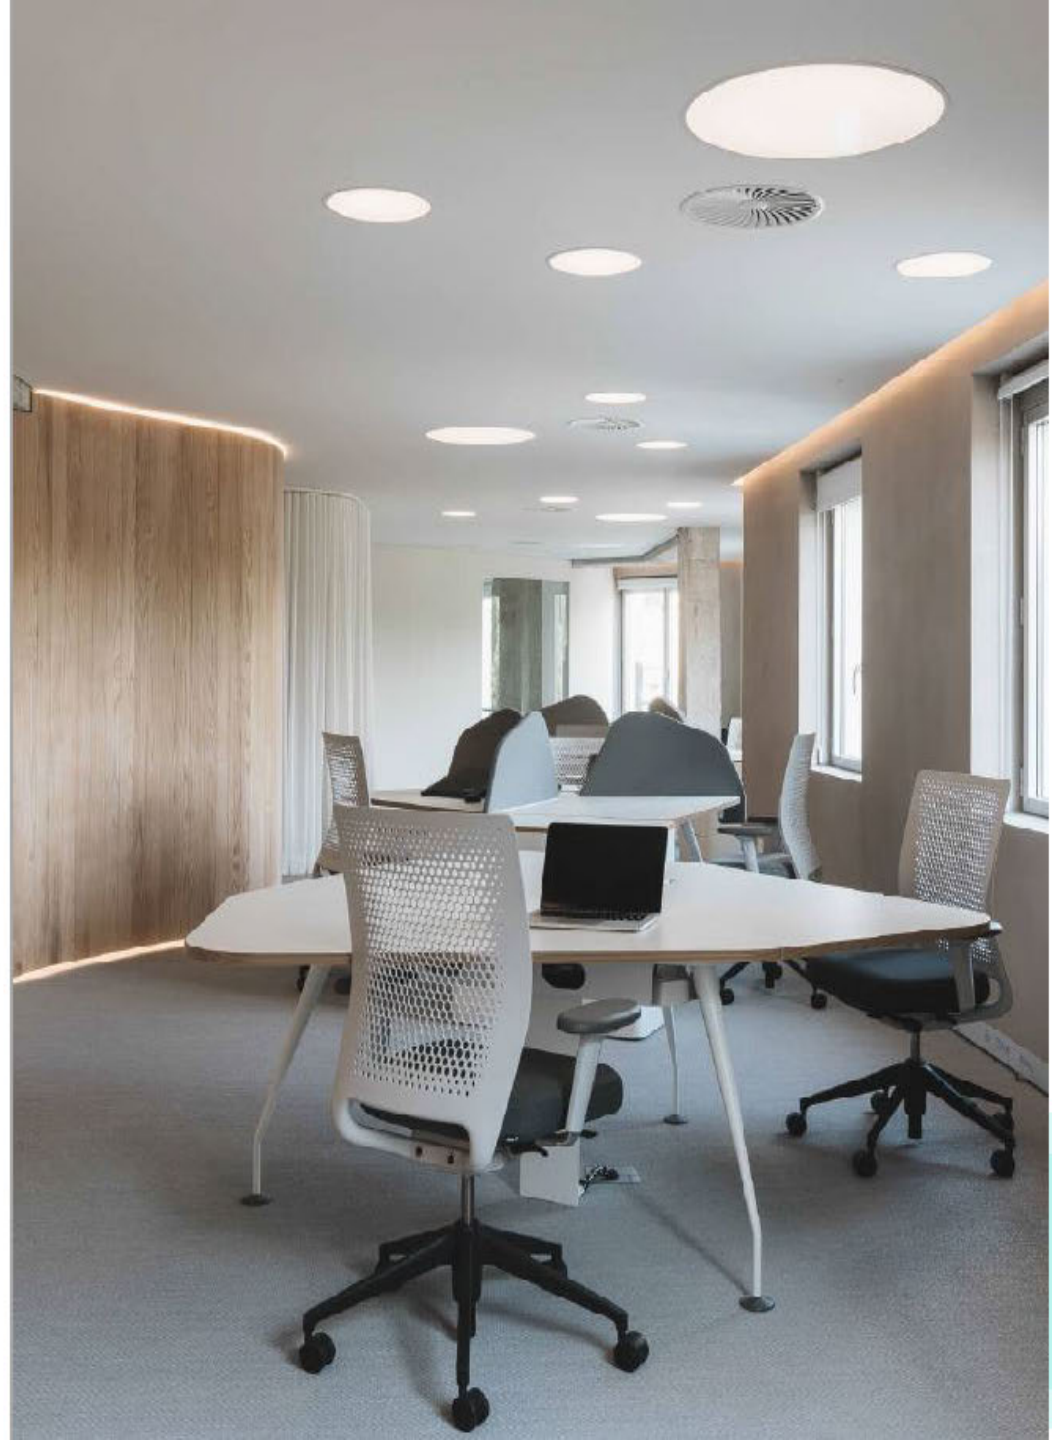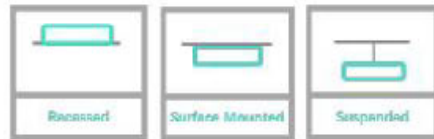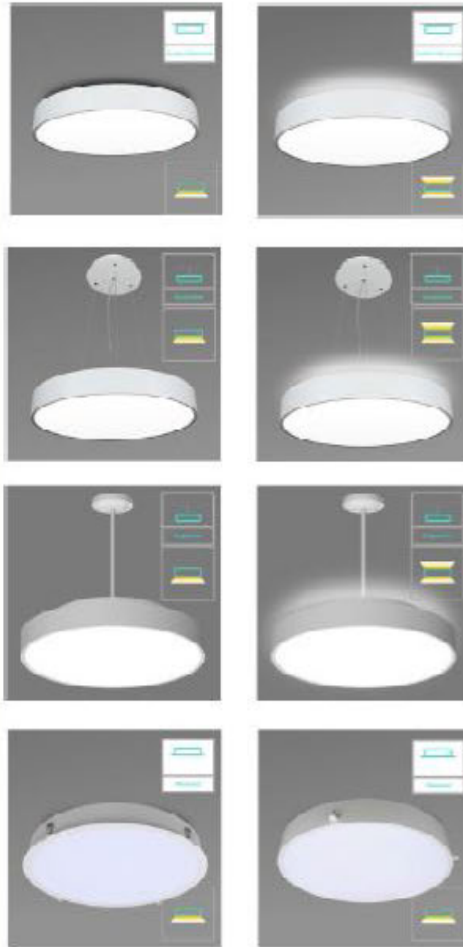



Overview

The LEDestá™ round panel light Jessica series are stylish designed backlite luminaires, with a wide range from diameter 30cm to 120cm. Lunar floats below the ceiling like a moon. With its uniform, glare-free light and modern, purist design this series of round luminaires lends any room a special look, and is ideal for e.g. creative zones, VDU workstations and prestigious sales spaces.

The standard Jessica comes with Surface Mounted installation kit, and you can have it Pendant installed with optional suspension wire kit or stem mounting kit. Besides this, Jessica series also has Recessed version and Trimless Recessed version to meet different requirements of architects and projects.

Advantages

- A strong family with various installation ways – Recessed/Surface Mounted/Pendant
- Easy and fast installation, saving installation cost
- Jessica has a wide product range with down light only and direct/indirect light options
- Flexible and customization oriented, bespoke specification are welcome
- Professional LED lighting manufacturer, ODM for EU top lighting brands, no risk for partnership

Features

- Standard sizes (mm): Ø300/ Ø400/ Ø480/ Ø600/ Ø900/ Ø1200 (mm)
- RAL9016 as standard coating color, other RAL colors available on request
- Range of color temperatures 3000K, 3500K, 4000K, 5000K & 6000K
- 5 Years Warranty
- Various dimming options, including 0-10V, DALI, Switch Dim etc.
- Emergency/sensor options available


■ Jessica LED Panel Light Surface Mounted and Up/Down version



Model	Part No.	Power	Luminous Flux	Dimension(mm)
D30S	BLR15/D30S	15W	1275 lm	Ø300x65
D40S	BLR20/D40S	20W	1700 lm	Ø400x65
D50S	BLR25/D50S	25W	2125 lm	Ø480x95
D60S	BLR40/D60S	40W	3400 lm	Ø600x95
D90S	BLR90/90S	90W	7650 lm	Ø900x95
D120S	BLR150/D120S	150W	12750 lm	Ø1200x95
D50S-UD	BLR50/D50S-UD	50W	1700lm↑ 2550lm↓	Ø480x95
D60S-UD	BLR80/D60S-UD	80W	2550lm↑ 4250lm↓	Ø600x95
D90S-UD	BLR120/D90S-UD	120W	4080lm↑ 6120lm↓	Ø900x95
D120S-UD	BLR150/D120S-UD	150W	4250lm↑ 8500lm↓	Ø1200x95



Jessica LED Panel Light Stem Mounting Pendant version (plus stem mounting kit)

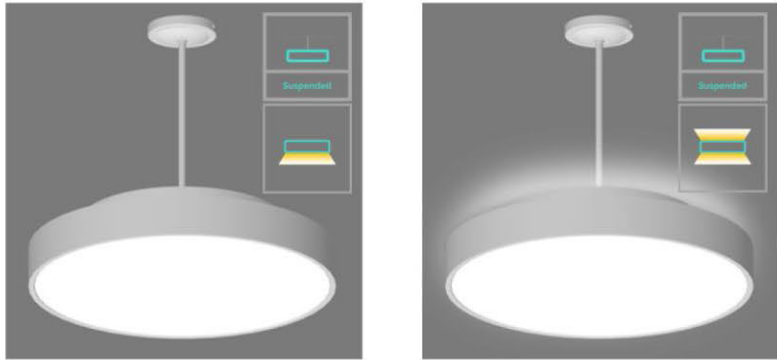

Model	Part No.	Power	Luminous Flux	Dimension(mm)
D30SM	BLR15/D30SM	15W	1275 lm	∅300x65
D40SM	BLR20/D40SM	20W	1700 lm	∅400x65
D50SM	BLR25/D50SM	25W	2125 lm	∅480x95
D60SM	BLR40/D60SM	40W	3400 lm	∅600x95
D90SM	BLR90/90SM	90W	7650 lm	∅900x95
D120SM	BLR150/D120SM	150W	12750 lm	∅1200x95
D50SM-UD	BLR50/D50SM-UD	50W	1700lm↑ 2550lm↓	∅480x95
D60SM-UD	BLR80/D60SM-UD	80W	2550lm↑ 4250lm↓	∅600x95
D90SM-UD	BLR120/D90SM-UD	120W	4080lm↑ 6120lm↓	∅900x95
D120SM-UD	BLR150/D120SM-UD	150W	4250lm↑ 8500lm↓	∅1200x95


Jessica LED Panel Light Wire Suspension Pendant version (plus suspension wire kit)



Model	Part No.	Power	Luminous Flux	Dimension(mm)
D30SP	BLR15/D30SP	15W	1275 lm	∅300x65
D40SP	BLR20/D40SP	20W	1700 lm	∅400x65
D50SP	BLR25/D50SP	25W	2125 lm	∅480x95
D60SP	BLR40/D60SP	40W	3400 lm	∅600x95
D90SP	BLR90/90SP	90W	7650 lm	∅900x95
D120SP	BLR150/D120SP	150W	12750 lm	∅1200x95
D50SP-UD	BLR50/D50SP-UD	50W	1700lm↑ 2550lm↓	∅480x95
D60SP-UD	BLR80/D60SP-UD	80W	2550lm↑ 4250lm↓	∅600x95
D90SP-UD	BLR120/D90SP-UD	120W	4080lm↑ 6120lm↓	∅900x95
D120SP-UD	BLR150/D120SP-UD	150W	4250lm↑ 8500lm↓	∅1200x95



Jessica LED Panel Light Recessed version

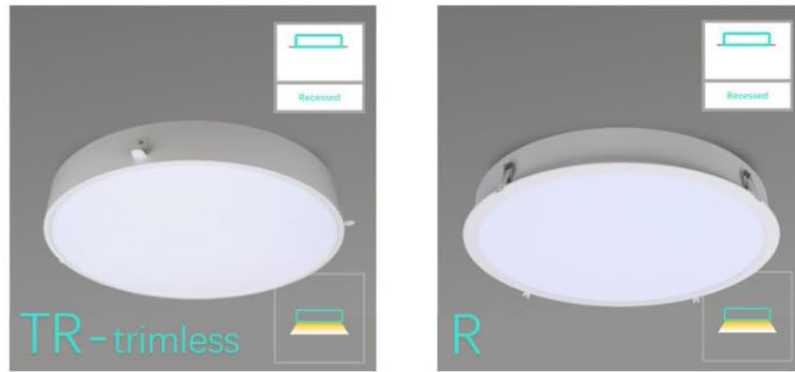


Model	Part No.	Power	Luminous Flux	Dimension(mm)
D30TR	BLR15/D30TM	15W	1275 lm	∅300x65 cut-out: ∅310
D40TR	BLR20/D40TR	20W	1700 lm	∅400x65 cut-out: ∅410
D50TR	BLR25/D50TR	25W	2125 lm	∅480x95 cut-out: ∅490
D60TR	BLR40/D60TR	40W	3400 lm	∅600x95 cut-out: ∅610
D90TR	BLR90/90TR	90W	7650 lm	∅900x95 cut-out: ∅910
D120TR	BLR150/D120TR	150W	12750 lm	∅1200x95 cut-out: ∅1210
D50R	BLR50/D50R	50W	2125 lm	∅510x95 cut-out: ∅495
D60R	BLR80/D60R	80W	3400 lm	∅630x95 cut-out: ∅615
D90R	BLR120/D90R	120W	7650 lm	∅930x95 cut-out: ∅915
D120R	BLR150/D120R	150W	12750 lm	∅1230x95 cut-out: ∅1215




Light distribution


- Down Light version

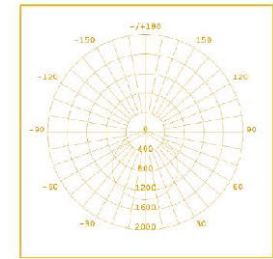


- Up and Down Light version

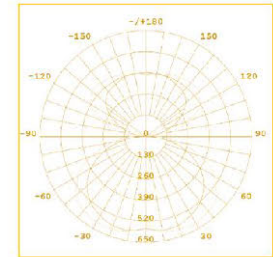


Dimensions (mm)

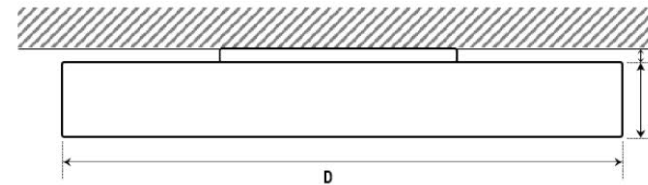

Model	D	H	H'	A	B	E	F
D30	∅300	50	15	250	35	125	35
D40	∅400	50	15	250	35	125	35
D50	∅480	80	15	250	35	125	35
D60	∅600	80	15	250	35	125	35
D90	∅900	80	15	250	35	125	35
D120	∅1200	80	15	350	35	125	35

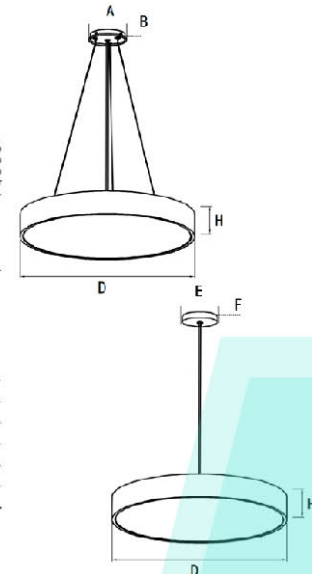




Rocket


- Direct and indirect light with Opalic diffuser and Transparent diffuser, non-yellowing PMMA light guide
- 120lm/W, LED square and rectangular panel with rounded corners
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description : LEDestá LED panel light Rocket family for direct and indirect light by suspended and surface mounted installation, 120lm/W, square and rectangular panel with rounded corners, non-yellowing PMMA LGP



UD D
Up/Down Surface Mounted



UD
Up/Down Suspended




TP
Transparent Suspended

■ ROCKET Round Corner LED Panel Light – Up/Down | Transparent




Model	Part No.	Power	Luminous Flux	Dimension
400x400	PLR28/S40-UD	28W	882 lm ↑ 2058 lm ↓	400x400x20
500x500	PLR32/S50-UD	32W	1008 lm ↑ 2352 lm ↓	500x500x20
600x600	PLR40/S60-UD	40W	1440 lm ↑ 3360 lm ↓	600x600x20
400x800	PLR40/S48-UD	40W	1440 lm ↑ 3360 lm ↓	400x800x20
300x1200	PLR45/S31-UD	45W	1620 lm ↑ 3780 lm ↓	300x1200x20
400x400	PLR28/S40-UD D	28W	588 lm ↑ 2352 lm ↓	400x400x20
500x500	PLR32/S50-UD D	32W	672 lm ↑ 2688 lm ↓	500x500x20
600x600	PLR40/S60-UD D	40W	960 lm ↑ 3840 lm ↓	600x600x20
400x800	PLR40/S48-UD D	40W	960 lm ↑ 3840 lm ↓	400x800x20
300x1200	PLR45/S31-UD D	45W	1080 lm ↑ 4320 lm ↓	300x1200x20
400x400	PLR28/S40-TP	28W	1470 lm ↑ 1470 lm ↓	400x400x20
500x500	PLR32/S50-TP	32W	1680 lm ↑ 1680 lm ↓	500x500x20
600x600	PLR40/S60-TP	40W	2400 lm ↑ 2400 lm ↓	600x600x20
400x800	PLR40/S48-TP	40W	2400 lm ↑ 2400 lm ↓	400x800x20
300x1200	PLR45/S31-TP	45W	2700 lm ↑ 2700 lm ↓	300x1200x20



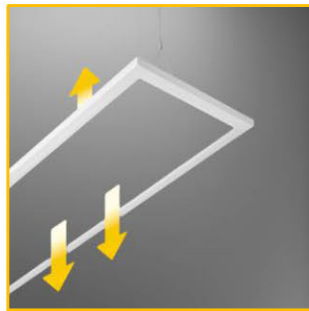


Viber

- Direct and indirect light with Opalic diffuser or Transparent diffuser, non-yellowing PMMA light guide
- 130lm/W, available light panel length 1.2m, 1.5m, and 1.8m
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED panel Viber UD family for direct and indirect light by suspended installation, 130lm/W, available length 1.2m, 1.5m and 1.8m, non-yellowing PMMA LGP.




UD
Up/Down Suspended



TP
Transparent Suspended


■ VIBER Linear LED Panel Light – Up/Down | Transparent

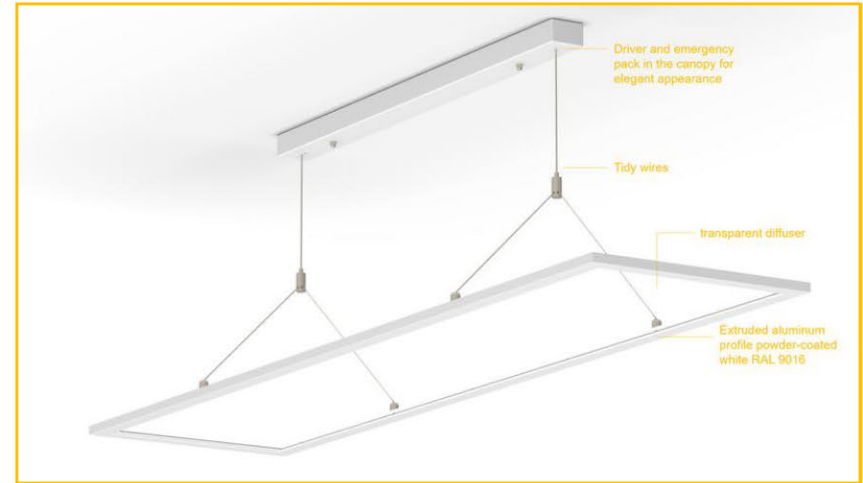

Model	Part No.	Power	Luminous Flux	Dimension
300x1200	PLS30/312P-UD	30W	1170lm↑2730lm↓	295x1195x15 mm
250x1200	PLS30/212P-UD	30W	1170lm↑2730lm↓	245x1195x15 mm
250x1500	PLS40/215P-UD	40W	1560lm↑3640lm↓	245x1495x15 mm
250x1800	PLS45/218P-UD	45W	1755lm↑4095lm↓	245x1795x15 mm
300x1200	PLS30/312P-TP	30W	1950lm↑ 1950lm↓	295x1195x15 mm
250x1200	PLS30/212P-TP	30W	1950lm↑ 1950lm↓	245x1195x15 mm
250x1500	PLS40/215P-TP	40W	2600lm↑ 2600lm↓	245x1495x15 mm
250x1800	PLS45/218P-TP	45W	2925lm↑ 2925lm↓	245x1795x15 mm



Surface Mounted Luminaire






Libro


- Super easy surface mounted installation
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED panel lights LIBRO series has been designed specifically for Surface Mounted installation on Plasterboard and Concrete ceilings.

With LEDestá patented mounting fixture, the installer no need to make the positioning when install, so the installation is simple and easy, also no need to dismantle and reassemble as traditional surface mounted luminaires, saving huge time for installers and enabling them to complete the project easily and quickly.

■ LIBRO LED Surface Mounted Luminaire — Down version

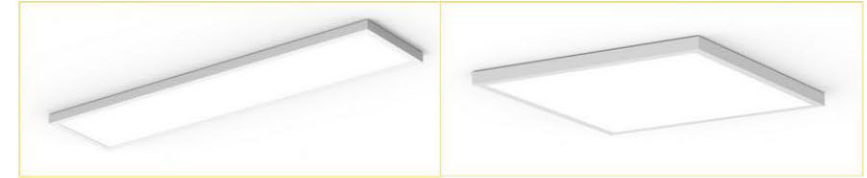

- Direct light version



Model	Part No.	Power	Luminous Flux	Dimension (mm)
450x450	PL25/045SM	25W	3000 lm	450x450x45
600x600	PL30/060SM	30W	3600 lm	600x600x45
700x700	PL40/070SM	40W	4800 lm	700x700x45
300x1200	PL34/312SM	34W	4000 lm	300x1200x45
300x1500	PL42/315SM	42W	5000 lm	300x1500x45
184x1231	PL22/112SM	22W	2500 lm	184x1231x45
184x1531	PL42/115SM	42W	5000 lm	184x1531x45
284x1231	PL34/212SM	34W	4000 lm	284x1231x45
284x1531	PL42/215SM	42W	5000 lm	284x1531x45
310x1247	PL34/313SM	34W	4000 lm	310x1247x45
310x1547	PL42/316SM	42W	5000 lm	310x1547x45



Libro UD


- Super easy surface mounted installation, Up and Down light
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED panel lights LIBRO series has been designed specifically for Surface Mounted installation on Plasterboard and Concrete ceilings. LIBRO UD is the up and down light version of LIBRO.

With LEDestá patented mounting fixture, the installer no need to make the positioning when install, so the installation is simple and easy, also no need to dismantle and reassemble as traditional surface mounted luminaires, saving huge time for installers and enabling them to complete the project easily and quickly.

■ LIBRO UD LED Surface Mounted Luminaire – Up/Down version



• Direct/indirect light version

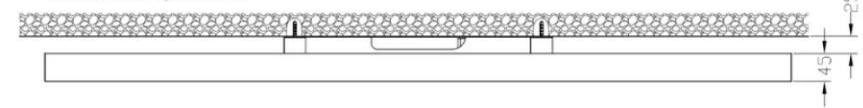


Model	Part No.	Power	Luminous Flux	Dimension (mm)
450x450	PL25/045SM-UD	25W	300 lm↑ 2700 lm↓	450x450x70
600x600	PL30/060SM-UD	30W	360 lm↑ 3240 lm↓	600x600x70
700x700	PL40/070SM-UD	40W	480 lm↑ 4320 lm↓	700x700x70
300x1200	PL34/312SM-UD	34W	400 lm↑ 3600 lm↓	300x1200x70
300x1500	PL42/315SM-UD	42W	500 lm↑ 4500 lm↓	300x1500x70
184x1231	PL22/112SM-UD	22W	250 lm↑ 2250 lm↓	184x1231x70
184x1531	PL42/115SM-UD	42W	500 lm↑ 4500 lm↓	184x1531x70
284x1231	PL34/212SM-UD	34W	400 lm↑ 3600 lm↓	284x1231x70
284x1531	PL42/215SM-UD	42W	500 lm↑ 4500 lm↓	284x1531x70
310x1247	PL34/313SM-UD	34W	400 lm↑ 3600 lm↓	310x1247x70
310x1547	PL42/316SM-UD	42W	500 lm↑ 4500 lm↓	310x1547x70



LED Transparent Ceiling Light SATURN II

- Transparent, 360 degree ambient lighting
- Triac Dimming, Flicker free, 3 CCT all in 1
- Breath-taking price
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED Transparent Ceiling Light Saturn II offers a spacious lighting. Classy, modern and sleek design. PMMA light guide, Triac Dimming and flicker free. Customers can choose 3 CCT all in one.



■ SATURN II LED Surface Mounted Luminaire

- CCT switch changeable
- TRIAC dim
- Flicker free



Model	Part Number	Dimension(mm)	Lumen Output	System Power
Round	SML15/D30S	ø308	1650 lm	15 W
	SML22/D38S	ø388	2420 lm	22 W
Hexagon	SML15/H36S	365(Diagonal)	1650 lm	15 W
	SML22/H46S	455(Diagonal)	2420 lm	22 W




Cyndi Surface Mounted

- Easy surface mounted for any ceilings including concrete ceiling
- Down light only or both direct and indirect light, diameter from 40cm to 120cm
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED round panel light family by surface mounted; direct light only or direct and indirect light optional, in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm.


slots for different panel sizes

turn to the right position

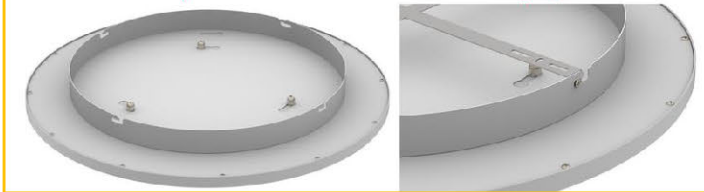


CYNDI | Surface Mounted

■ CYNDI Surface Mounted - Down | Up/Down

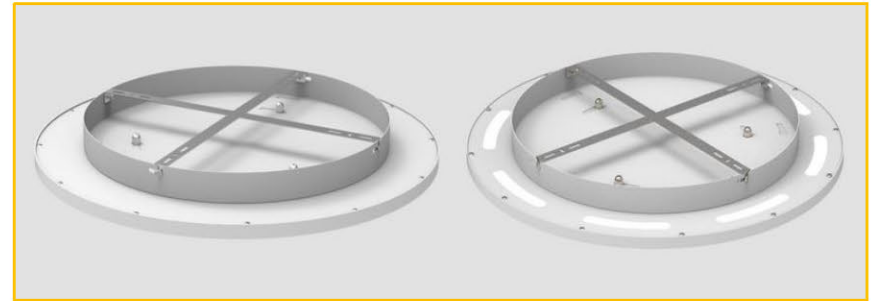

Model	Product Dimension	Item No.	Luminous Flux	System Power	Efficiency @ 4000K
D40	∅400*20mm	PLR28/D40 D	2940lm	28W	105lm/W
D50	∅500*20mm	PLR32/D50 D	3360lm	32W	105lm/W
D60	∅600*20mm	PLR40/D60 D	4800lm	40W	120lm/W
D80	∅780*20mm	PLR55/D80 D	6600lm	55W	120lm/W
D100	∅1000*20mm	PLR75/D100 D	9000lm	75W	120lm/W
D120	∅1200*20mm	PLR85/D120 D	10200lm	85W	120lm/W
D40 UD	∅400*20mm	PLR28/D40-UD D	2940lm	28W	105lm/W
D50 UD	∅500*20mm	PLR32/D50-UD D	3360lm	32W	105lm/W
D60 UD	∅600*20mm	PLR40/D60-UD D	4800lm	40W	120lm/W
D80 UD	∅780*20mm	PLR55/D80-UD D	6600lm	55W	120lm/W
D100 UD	∅1000*20mm	PLR75/D100-UD D	9000lm	75W	120lm/W
D120 UD	∅1200*20mm	PLR85/D120-UD D	10200lm	85W	120lm/W



Overview

The LEDestá™ round panel light Jessica series are stylish designed backlite luminaires, with a wide range from diameter 30cm to 120cm. Lunar floats below the ceiling like a moon. With its uniform, glare-free light and modern, purist design this series of round luminaires lends any room a special look, and is ideal for e.g. creative zones, VDU workstations and prestigious sales spaces.

The standard Jessica comes with Surface Mounted installation kit, and you can have it Pendant installed with optional suspension wire kit or stem mounting kit. Besides this, Jessica series also has Recessed version and Trimless Recessed version to meet different requirements of architects and projects.

Advantages

- A strong family with various installation ways – Recessed/Surface Mounted/Pendant
- Easy and fast installation, saving installation cost
- Jessica has a wide product range with down light only and direct/indirect light options
- Flexible and customization oriented, bespoke specification are welcome
- Professional LED lighting manufacturer, ODM for EU top lighting brands, no risk for partnership

Features

- Standard sizes (mm): Ø300/ Ø400/ Ø480/ Ø600/ Ø900/ Ø1200 (mm)
- RAL9016 as standard coating color, other RAL colors available on request
- Range of color temperatures 3000K, 3500K, 4000K, 5000K & 6000K
- 5 Years Warranty
- Various dimming options, including 0-10V, DALI, Switch Dim etc.
- Emergency/sensor options available


Jessica | Surface mounted

■ Jessica LED Panel Light Surface Mounted and Up/Down version







Model	Part No.	Power	Luminous Flux	Dimension(mm)
D30S	BLR15/D30S	15W	1275 lm	Ø300x65
D40S	BLR20/D40S	20W	1700 lm	Ø400x65
D50S	BLR25/D50S	25W	2125 lm	Ø480x95
D60S	BLR40/D60S	40W	3400 lm	Ø600x95
D90S	BLR90/90S	90W	7650 lm	Ø900x95
D120S	BLR150/D120S	150W	12750 lm	Ø1200x95
D50S-UD	BLR50/D50S-UD	50W	1700lm↑ 2550lm↓	Ø480x95
D60S-UD	BLR80/D60S-UD	80W	2550lm↑ 4250lm↓	Ø600x95
D90S-UD	BLR120/D90S-UD	120W	4080lm↑ 6120lm↓	Ø900x95
D120S-UD	BLR150/D120S-UD	150W	4250lm↑ 8500lm↓	Ø1200x95



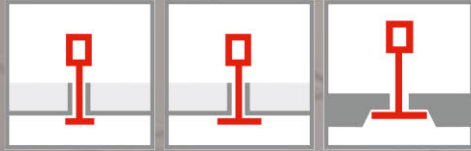



LED T Grid Linear Light

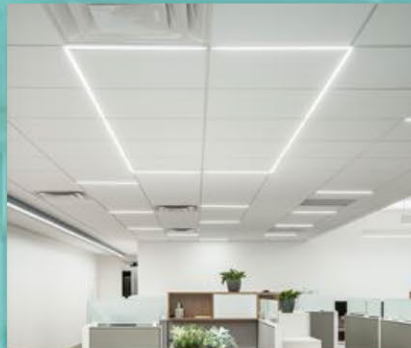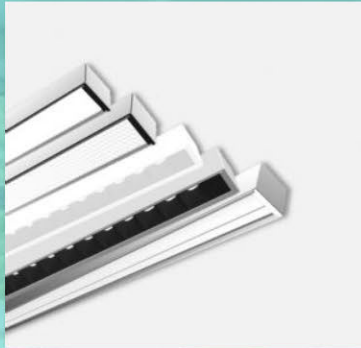

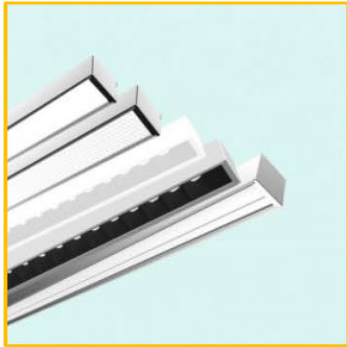


Tomi Overview

- Tool-less installation on T15/T24 T bars
- All patterns are possible; Seamless Connection.
- One driver to multiple light module, loop in&out
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: the LEDestá™ LED T grid linear light - Tomi, is designed for T15/T24 T bars. No need to modify or change anything on original T-bar or ceilings, Tomi is fixed to the original T bar easily and fast.

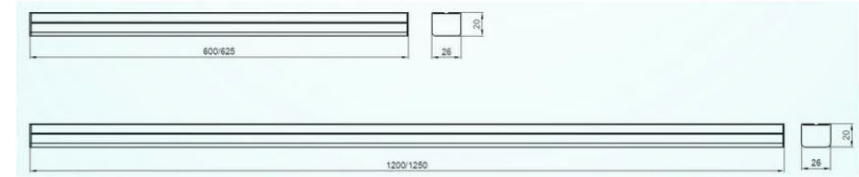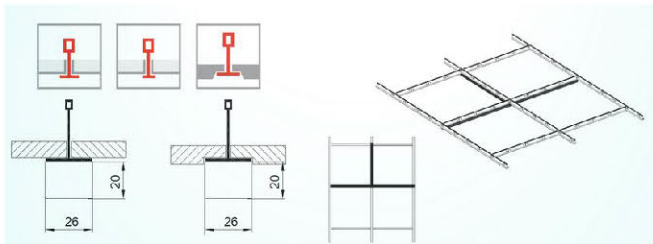


Model	Part Number	Dimension (mm)	Power (W)	Lumen Output	Beam
- Opalic	TM15/060/OP	600x26x20	15	1800 lm	120°
	TM15/062/OP	625x26x20	15	1800 lm	120°
	TM30/120/OP	1200x26x20	30	3600 lm	120°
- Micro Prismatic	TM15/060/MP	600x26x20	15	1500 lm	90°
	TM15/062/MP	625x26x20	15	1500 lm	90°
	TM30/120/MP	1200x26x20	30	3000 lm	90°
- Black Reflector	TM15/060/BR	600x26x20	15	1500 lm	60° /90°
	TM15/062/BR	625x26x20	15	1500 lm	60° /90°
	TM30/120/BR	1200x26x20	30	3000 lm	60° /90°
- White Reflector	TM15/060/WR	600x26x20	15	1650 lm	60° /90°
	TM15/062/WR	625x26x20	15	1650 lm	60° /90°
	TM30/120/WR	1200x26x20	30	3300 lm	60° /90°
- Asymmetric	TM15/060/AS	600x26x20	15	1500 lm	120°
	TM15/062/AS	625x26x20	15	1500 lm	120°
	TM30/120/AS	1200x26x20	30	3000 lm	120°
	TM30/125/AS	1250x26x20	30	3000 lm	120°





Tomi OP – Opalic Diffuser


- Tool-less installation on T15/T24 T bars
- All patterns are possible; Seamless Connection.
- One driver to multiple light module, loop in&out
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED T grid linear light - Tomi, is designed for T15/T24 T bars. No need to modify or change anything on original T-bar or ceilings, Tomi is fixed to the original T bar easily and fast.

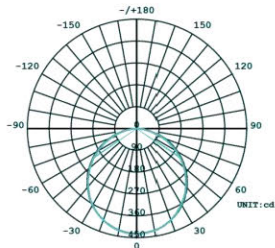

■ TOMI OP Opalic LED T Grid Linear Light

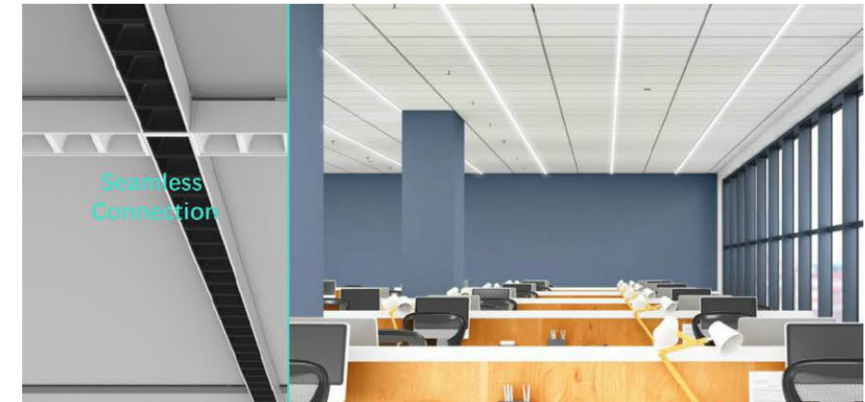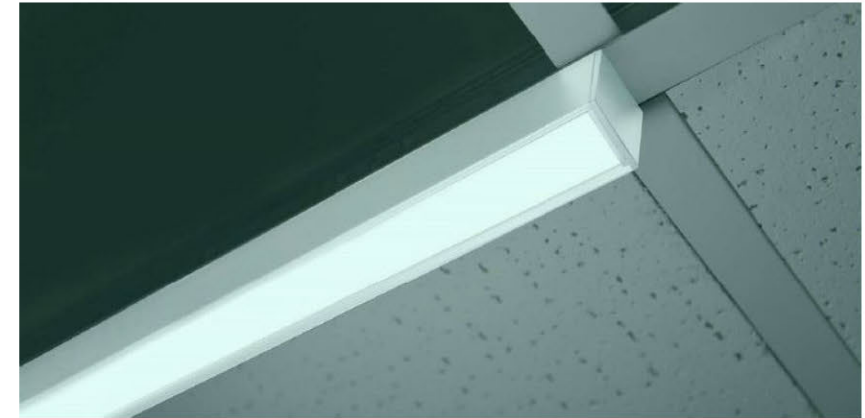

Model	Part Number	Dimension (mm)	Power (W)	Lumen Output	Beam
	TM15/060/OP	600x26x20	15	1800 lm	120°
	TM15/062/OP	625x26x20	15	1800 lm	120°
	TM30/120/OP	1200x26x20	30	3600 lm	120°
	TM30/125/OP	1250x26x20	30	3600 lm	120°




■ TOMI MP Micro Prismatic LED T Grid Linear Light




Tomi MP — Micro Prismatic

- Tool-less installation on T15/T24 T bars
- All patterns are possible; Seamless Connection.
- One driver to multiple light module, loop in&out
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED T grid linear light - Tomi, is designed for T15/T24 T bars. No need to modify or change anything on original T-bar or ceilings, Tomi is fixed to the original T bar easily and fast.

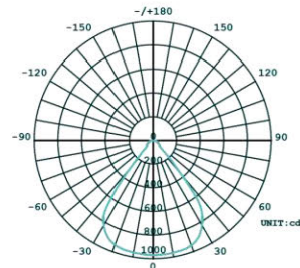


Model	Part Number	Dimension (mm)	Power (W)	Lumen Output	Beam
MP-Prismatic	TM15W060/MP	600x26x20	15	1500 lm	90°
	TM15W062/MP	625x26x20	15	1500 lm	90°
	TM30W120/MP	1200x26x20	30	3000 lm	90°
	TM30W125/MP	1250x26x20	30	3000 lm	90°




Tomi BR – Black Reflector


- - UGR < 16 at 60D beam, UGR < 19 at 90D beam
- - All patterns are possible; Seamless Connection.
- - One driver to multiple light module, loop in&out
- - 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED T grid linear light - Tomi, is designed for T15/T24 T bars. No need to modify or change anything on original T-bar or ceilings, Tomi is fixed to the original T bar easily and fast.

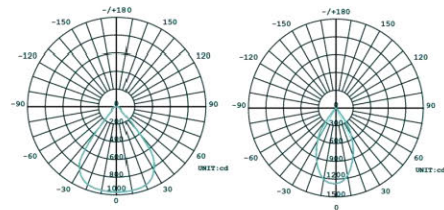

■ TOMI BR Black Reflector LED T Grid Linear Light

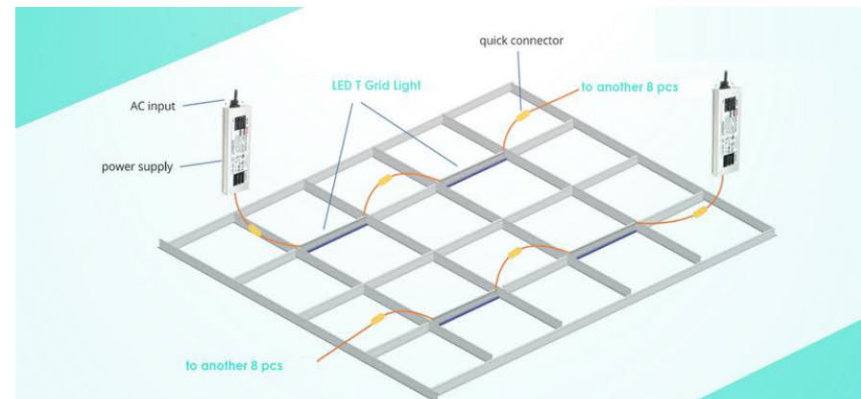


Model	Part Number	Dimension (mm)	Power (W)	Lumen Output	Beam
 BR-Black Reflector	TM15/060/BR	600x26x20	15	1500 lm	60° /90°
	TM15/062/BR	625x26x20	15	1500 lm	60° /90°
	TM30/120/BR	1200x26x20	30	3000 lm	60° /90°
	TM30/125/BR	1250x26x20	30	3000 lm	60° /90°



Tomi WR – White Reflector

- UGR<19 at 60D&90D beam
- All patterns are possible; Seamless Connection.
- One driver to multiple light module, loop in&out
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED T grid linear light - Tomi, is designed for T15/T24 T bars. No need to modify or change anything on original T-bar or ceilings, Tomi is fixed to the original T bar easily and fast.


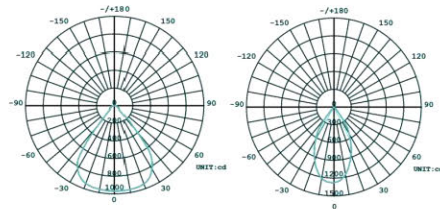


■ TOMI WR White Reflector LED T Grid Linear Light




Suitable for
All T24/T15
T-Bar
Ceilings

Model	Part Number	Dimension (mm)	Power (W)	Lumen Output	Beam
	TM15/060/WR	600x26x20	15	1650 lm	60° /90°
	TM15/062/WR	625x26x20	15	1650 lm	60° /90°
	TM30/120/WR	1200x26x20	30	3300 lm	60° /90°
	TM30/125/WR	1250x26x20	30	3300 lm	60° /90°

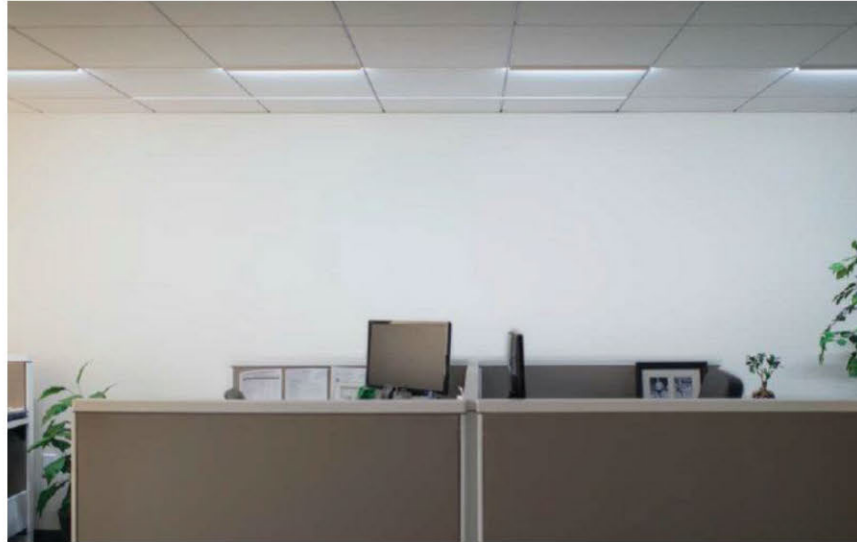



Tomi AS – Asymmetric

- Tool-less installation on T15/T24 T bars
- All patterns are possible; Seamless Connection.
- One driver to multiple light module, loop in&out
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The LEDestá™ LED T grid linear light - Tomi, is designed for T15/T24 T bars. No need to modify or change anything on original T-bar or ceilings, Tomi is fixed to the original T bar easily and fast.

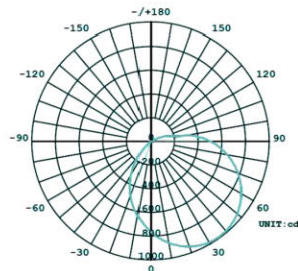

■ TOMI AS Asymmetric LED T Grid Linear Light

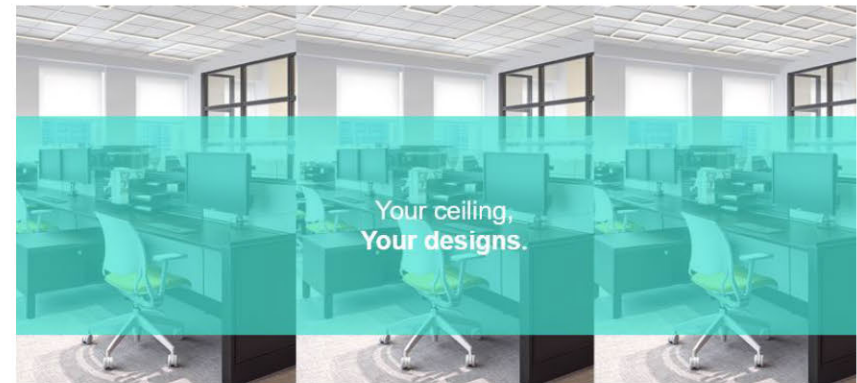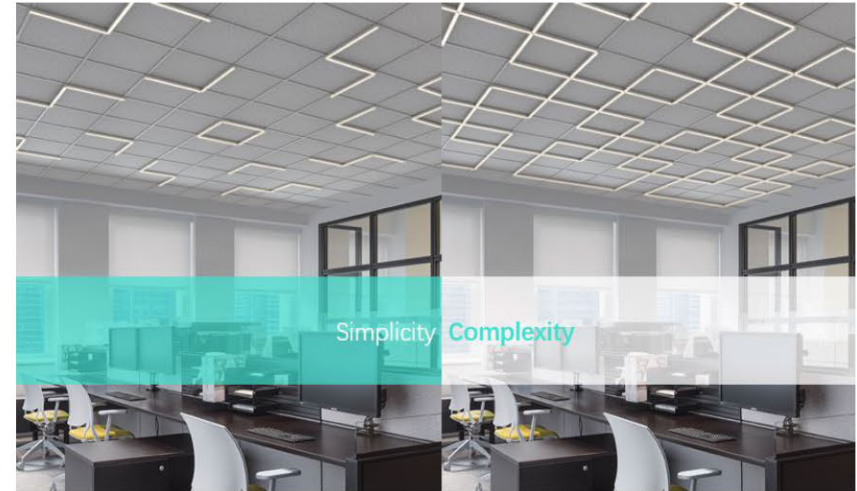

Model	Part Number	Dimension (mm)	Power (W)	Lumen Output	Beam
	TM15/060/AS	600x26x20	15	1500 lm	120°
	TM15/062/AS	625x26x20	15	1500 lm	120°
	TM30/120/AS	1200x26x20	30	3000 lm	120°
	TMB30/125/AS	1250x26x20	30	3000 lm	120°




Free Standing and Desktop Luminaire






LIZA

- LED free standing luminaire with uniform light panel
- UGR<18, 100lm/W, 50% direct and 50% indirect, touch dimming
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED free standing luminaire LIZA, UGR<18, direct and indirect light distribution, integrated PIR presence sensor and daylight sensor optional, touch dimming synchronous control



■ LIZA LED Free Standing Lamp

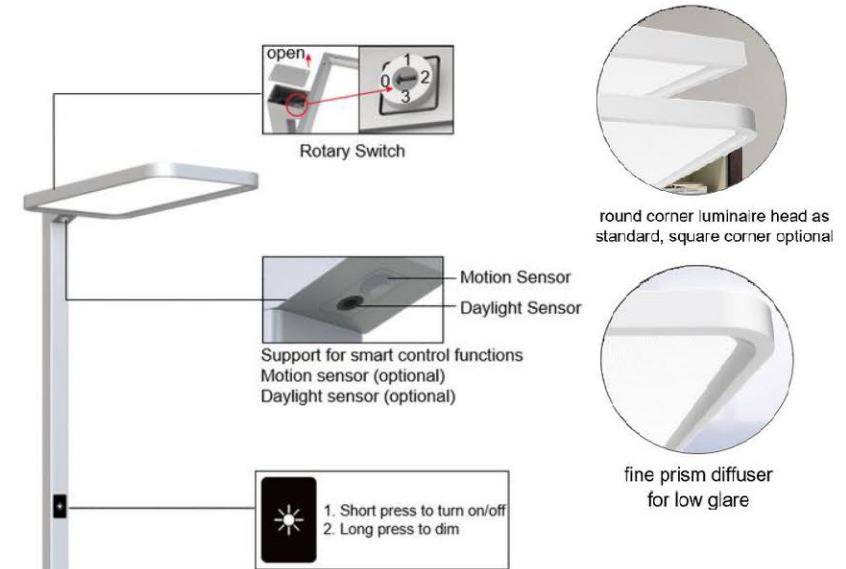

Function	Product Dimension	Item No.	Luminous Flux	System Power
Touch Dim	692 x 310 x 1950mm	LZ60/FM	3000lm↑/3000lm↓	60W (30W↑/30W↓)
	692 x 310 x 1950mm	LZ80/FM	4000lm↑/4000lm↓	80W (40W↑/40W↓)
Touch Dim Motion Sensor	692 x 310 x 1950mm	FLZ0/FM-M	3000lm↑/3000lm↓	60W (30W↑/30W↓)
	692 x 310 x 1950mm	LZ80/FM-M	4000lm↑/4000lm↓	80W (40W↑/40W↓)
Touch Dim Motion Sensor Daylight Sensor	692 x 310 x 1950mm	LZ60/FM-D	3000lm↑/3000lm↓	60W (30W↑/30W↓)
	692 x 310 x 1950mm	LZ80/FM-D	4000lm↑/4000lm↓	80W (40W↑/40W↓)




■ LIZA D LED Desktop Lamp





LIZA D

- LED desktop luminaire with uniform light panel
- UGR<18, 100lm/W, 50% direct and 50% indirect, touch dimming
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED desktop luminaire LIZA D, UGR<18, direct and indirect light distribution, integrated PIR presence sensor and daylight sensor optional, touch dimming synchronous control



Function	Product Dimension	Item No.	Luminous Flux	System Power
Touch Dim	692 x 310 x 1200mm	LZ60/DM	3000lm↑/3000lm↓	60W (30W↑/30W↓)
	692 x 310 x 1200mm	LZ80/DM	4000lm↑/4000lm↓	80W (40W↑/40W↓)
Touch Dim Motion Sensor	692 x 310 x 1200mm	LZ60/DM-M	3000lm↑/3000lm↓	60W (30W↑/30W↓)
	692 x 310 x 1200mm	LZ80/DM-M	4000lm↑/4000lm↓	80W (40W↑/40W↓)
Touch Dim Motion Sensor Daylight Sensor	692 x 310 x 1200mm	LZ60/DM-D	3000lm↑/3000lm↓	60W (30W↑/30W↓)
	692 x 310 x 1200mm	LZ80/DM-D	4000lm↑/4000lm↓	80W (40W↑/40W↓)

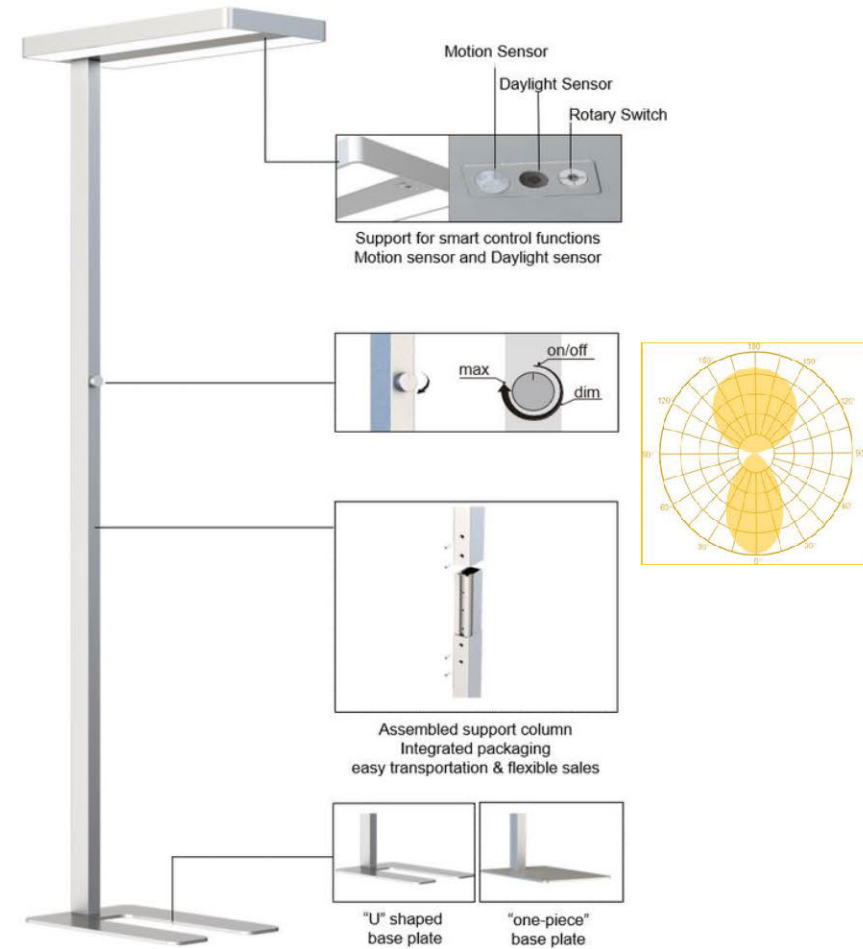


TWIX

- LED free standing luminaire head in classic design - UGR<17, 110lm/W, 50% direct and 50% indirect, knob dimming
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED free standing luminaire TWIX, UGR<17, direct and indirect light distribution, integrated PIR presence sensor and daylight sensor optional, knob dimming synchronous control.

■ TWIX LED Free Standing Lamp




Function	Product Dimension	Item No.	Luminous Flux	System Power
Knob Dim	610 x 280 x 1950mm	TX60/FT	3500lm↑/3100lm↓	60W (30W↑/30W↓)
	610 x 280 x 1950mm	TX80/FT	4600lm↑/4200lm↓	80W (40W↑/40W↓)
Knob Dim Motion Sensor	610 x 280 x 1950mm	TX60/FT-M	3500lm↑/3100lm↓	60W (30W↑/30W↓)
	610 x 280 x 1950mm	TX80/FT-M	4600lm↑/4200lm↓	80W (40W↑/40W↓)
Knob Dim Motion Sensor Daylight Sensor	610 x 280 x 1950mm	TX60/FT-D	3500lm↑/3100lm↓	60W (30W↑/30W↓)
	610 x 280 x 1950mm	TX80/FT-D	4600lm↑/4200lm↓	80W (40W↑/40W↓)

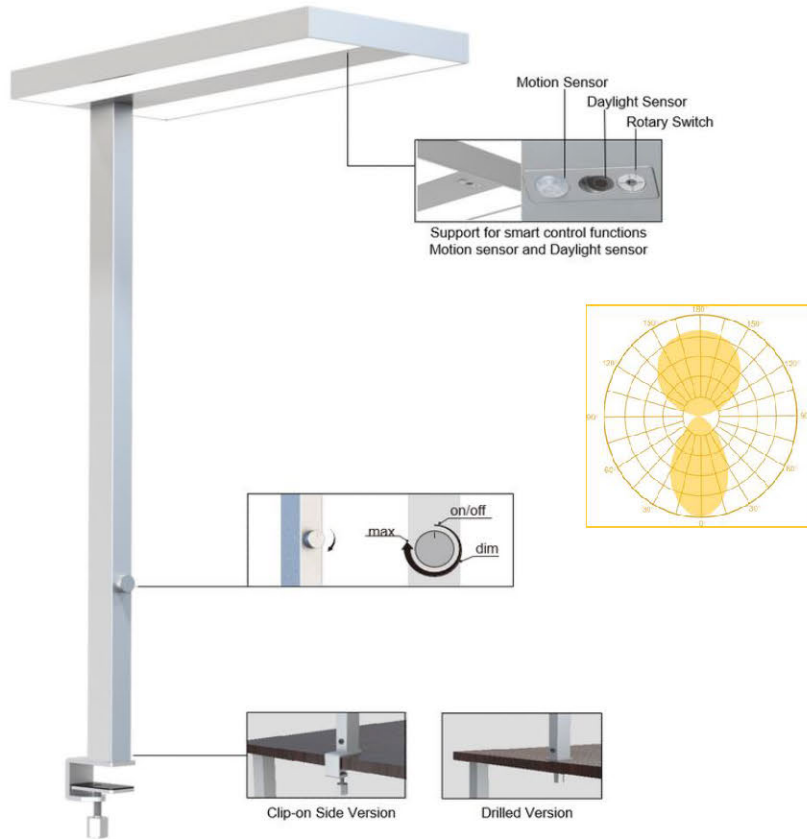



TWIX D

- LED desktop luminaire head in classic design
- UGR<17, 110lm/W, 50% direct and 50% indirect, knob dimming
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description : LEDestá LED desktop luminaire TWIX D, UGR<17, direct and indirect light distribution, integrated PIR presence sensor and daylight sensor optional, knob dimming synchronous control

■ TWIX D LED Desktop Lamp

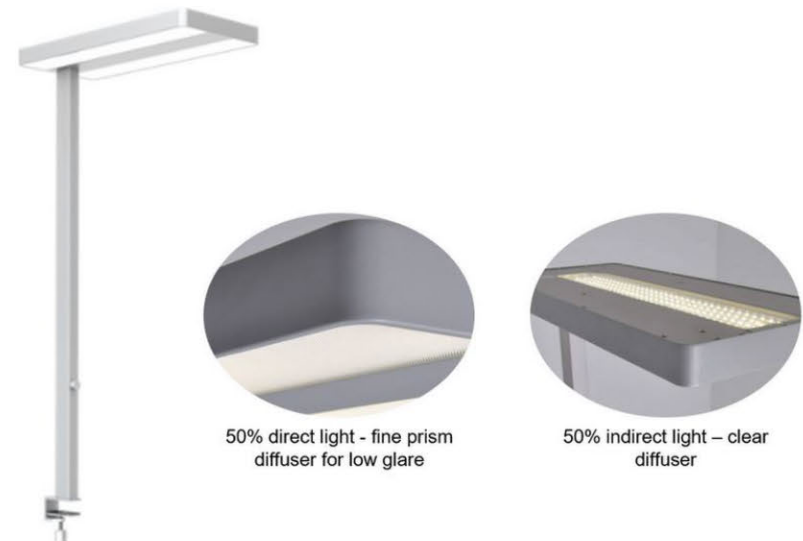

Function	Product Dimension	Item No.	Luminous Flux	System Power
Knob Dim	610 x 280 x 1200mm	TX60/DT	3500lm↑/3100lm↓	60W (30W↑/30W↓)
	610 x 280 x 1200mm	TX80/DT	4600lm↑/4200lm↓	80W (40W↑/40W↓)
Knob Dim Motion Sensor	610 x 280 x 1200mm	TX60/DT-M	3500lm↑/3100lm↓	60W (30W↑/30W↓)
	610 x 280 x 1200mm	TX80/DT-M	4600lm↑/4200lm↓	80W (40W↑/40W↓)
Knob Dim Motion Sensor Daylight Sensor	610 x 280 x 1200mm	TX60/DT-D	3500lm↑/3100lm↓	60W (30W↑/30W↓)
	610 x 280 x 1200mm	TX80/DT-D	4600lm↑/4200lm↓	80W (40W↑/40W↓)

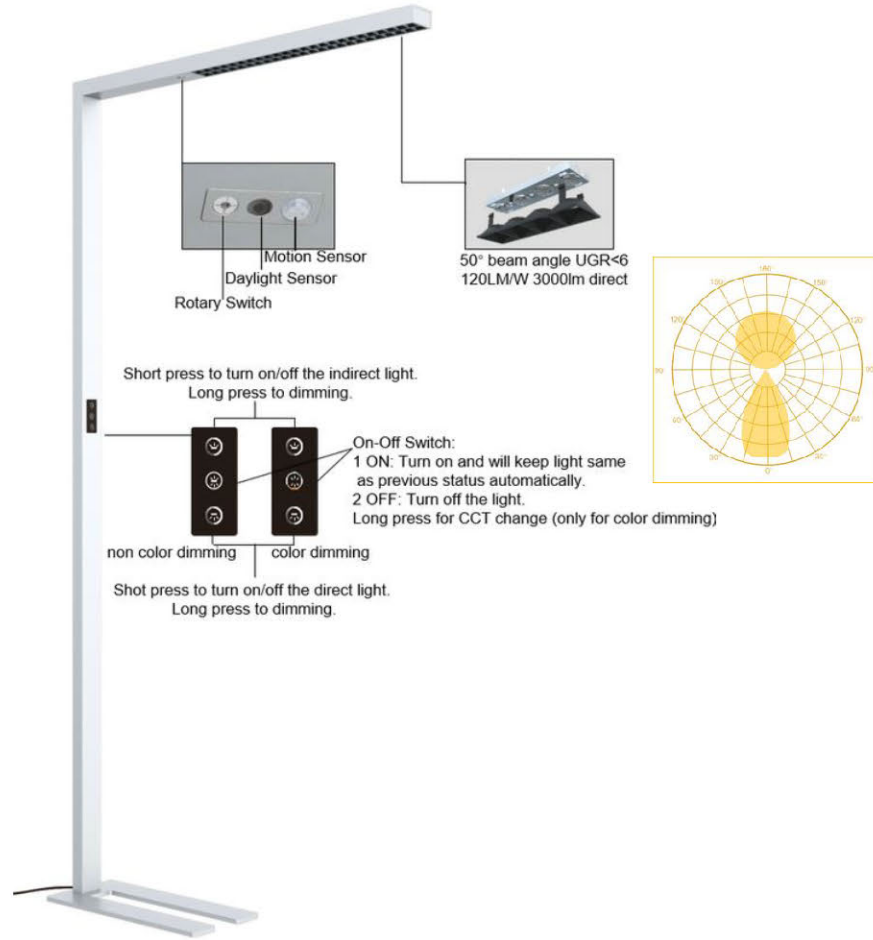

LUNA

- LED free standing luminaire linear shaped
- UGR<6, 120lm/W, 30% direct and 70% indirect, touch dimming
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED free standing luminaire LUNA, UGR<6, direct and indirect light distribution, integrated PIR presence sensor and daylight sensor optional, touch dimming asynchronous control

■ LUNA LED Free Standing Lamp



Function	Product Dimension	Item No.	Luminous Flux	System Power	Color Temperature
----------	-------------------	----------	---------------	--------------	-------------------

Touch Dim	1056 x 64 x 1950mm	LN80/FL	6600lm↑ /3000lm↓	80W (55W↑/25W↓)	3000K/4000K /6000K
-----------	--------------------	---------	---------------------	--------------------	-----------------------

Touch Dim Motion Sensor Daylight Sensor	1056 x 64 x 1950mm	LN80/FL-D	6600lm↑ /3000lm↓	80W (55W↑/25W↓)	3000K/4000K /6000K
---	--------------------	-----------	---------------------	--------------------	-----------------------

Touch Dim Motion Sensor Daylight Sensor Tunable White	1056 x 64 x 1950mm	LN80/FL-C	5500lm↑ /2500lm↓	80W (55W↑/25W↓)	3000K~6000K
--	--------------------	-----------	---------------------	--------------------	-------------





■ LUNA D LED Desktop Lamp




Function	Product Dimension	Item No.	Luminous Flux	System Power	Color Temperature
----------	-------------------	----------	---------------	--------------	-------------------

Touch Dim	1056 x 64 x 1200mm	LN80/DL	6600lm↑ /3000lm↓	80W (55W↑/25W↓)	3000K/4000K /6000K
-----------	--------------------	---------	---------------------	--------------------	-----------------------

Touch Dim Motion Sensor Daylight Sensor	1056 x 64 x 1200mm	LN80/DL-D	6600lm↑ /3000lm↓	80W (55W↑/25W↓)	3000K/4000K /6000K
---	--------------------	-----------	---------------------	--------------------	-----------------------

Touch Dim Motion Sensor Daylight Sensor Tunable White	1056 x 64 x 1200mm	LN80/DL-C	5500lm↑ /2500lm↓	80W (55W↑/25W↓)	3000K~6000K
--	--------------------	-----------	---------------------	--------------------	-------------

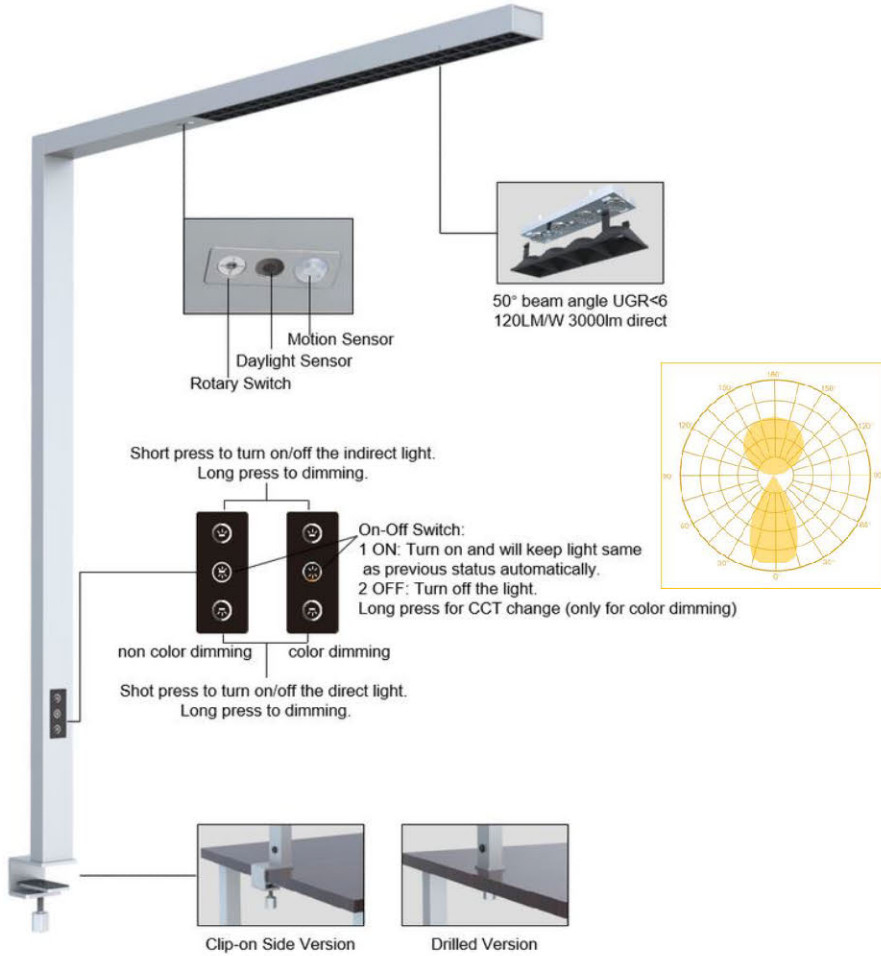

LUNA D

- LED desktop luminaire linear shaped
- UGR<6, 120lm/W, 30% direct and 70% indirect, touch dimming
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: LEDestá LED desktop luminaire LUNA D, UGR<6, direct and indirect light distribution, integrated PIR presence sensor and daylight sensor optional, touch dimming asynchronous control

Lighting for Specialty Applications



	Low Voltage 12V/24V/ 48V		Health Care COI<3.3
	PoE RJ45 Plug- In		Air Con Air Slot
	Water- Proof IP65		Irregular Shape

SERVICES

Pre-sales services

- ✓ Customized Product Development
- ✓ Free Project Consultant
- ✓ Professional Light Planning
- ✓ Easy Communication
- ✓ Fast Response and Quotation

After-sales services

- ✓ Pre-Shipment Report
- ✓ Product Warranty
- ✓ Installation Guideline
- ✓ Customer Satisfaction Survey
- ✓ Complaint handling

ENERSITA, JSC

www.ledesta.eu; biuroapsvietimas.lt

Tel: +370 600 93 111

Email: sales@ledesta.eu



LEDesta
premium lighting