




Features


Housing: Die-cast Aluminum
 Thermal Conductivity: 96 W/m·K
 Led: CREE JK3030
 CRI: Ra>70 (80&90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Inventronic
 Driver Efficiency: >90%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 20KV
 Waterproof: IP66
 Impact Test: IK08
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -40~50°C
 TM21: L90B10>50,000H
 Lifetime: 50,000H

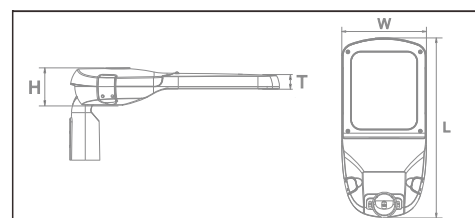

Functions

DALI · 0/1~10V · Timing · Program · Always-on Auxiliary

Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
CMBST024PE1F-CI	20W	100~277V	3000LM	>70 (80)	IP66	L570*W200*H100MM
CMBST040PE1F-CI	40W	100~277V	6000LM	>70 (80)	IP66	L570*W200*H100MM
CMBST060PE1F-CI	59W	100~277V	8260LM	>70 (80)	IP66	L570*W200*H100MM
CMBST080PE1F-CI	68W	100~277V	8840LM	>70 (80)	IP66	L570*W200*H100MM
CMBST100PE1F-CI	100W	100~277V	13000LM	>70 (80)	IP66	L610*W235*H100MM
CMBST120PE1F-CI	120W	100~277V	15600LM	>70 (80)	IP66	L610*W235*H100MM
CMBST150PE1F-CI	150W	100~277V	19500LM	>70 (80)	IP66	L680*W260*H100MM
CMBST180PE1F-CI	180W	100~277V	23400LM	>70 (80)	IP66	L680*W260*H100MM
CMBST200PE1F-CI	200W	100~277V	28000LM	>70 (80)	IP66	L775*W320*H100MM



“ Professional street light is required more and more for applications. Tempered glass and PMMA lens offer better UV protection. Inventronic driver and Cree led provide longer lifetime. Eneccertificate is provided to guarantee quality. ”

