

Features

- High reliability LEDs
- Power supply included, non flicker ~100Hz
- High quality aluminum slim body (RAL9003)
- Instant start
- Driver external 950mA / DC38V
- CRI Ra>85
- Documents: CE, RoHS, EMC, LVD test report

Applications


- Rooms lighting
- Hallways lighting
- Offices lighting
- Warehouses lighting
- Factory lighting

Technical specifications:


PB36W060P

Available colors	warm white white cool white
Color temperature, K	~3000K ~4200K ~6000K
Power consumption, W	36 W
Typical luminous flux, lm	3800 Lm 4320 Lm 4450 Lm
LED Type	Epistar /SAMSUNG LED
Dimensions, mm	595 x 595 x 10
Protection class	IP20/44
Color rendering index	RA>85

Light curves



Technical drawing

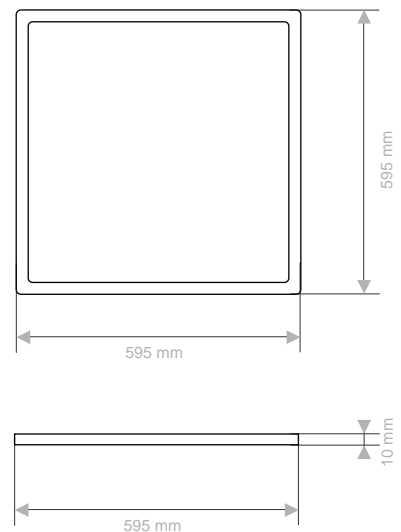



Other picture

