



LEDestón

premium lighting

Catalogue Nr.5

Quality Within Your Reach

www.ledesta.eu

WATERPROOF DOWNLIGHT SERIES

DPS WATERPROOF DOWNLIGHT SERIES (IP65)



Deep anti glare, different reflectors create different light effects to easily match various scene needs.

The use of the reflector cup and the reflector, after the emitted light is refracted to the reflector rod through the transparent cup and reflector, the light can reach the high standard comfort level of $URG < 16$, which greatly reduces the generation of glare and improves the user's comfortable experience.




	High Efficiency		HIGH CRI CRI > 95		IP 65 IP RATE		Aviation Grade Aluminum		radiation-free
	Anti-glare		Efficient Heat Dissipation		long life		Suitable for Low Ceilings		Anodizing
	Professional Light Distribution		Different sizes for optional		Beautiful Installation		High Illumination		Easy to Install



IP65 WATERPROOF DOWNLIGHT SERIES





**High waterproof, refuse to enter water, solve the problem of bathroom lights
Fashionable and versatile, exquisite and small, the light is bright and soft without flicker**

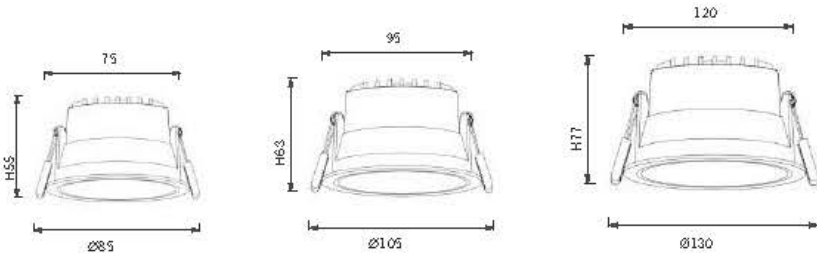


CCT 2700,3000,3500,4000,5700
 Beam Angle 20° 40°
 Input Voltage 220-240V ~50/60Hz
 Optional Color for Cover



Power	Dimension	Cutout	Clip Brand	Driver Brand
10-12W	85*H65mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15-20W	105*H63mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
25-30W	130*H77mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

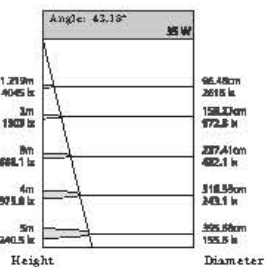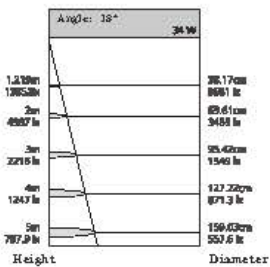


DBJ Grille Tube Spotlight Series

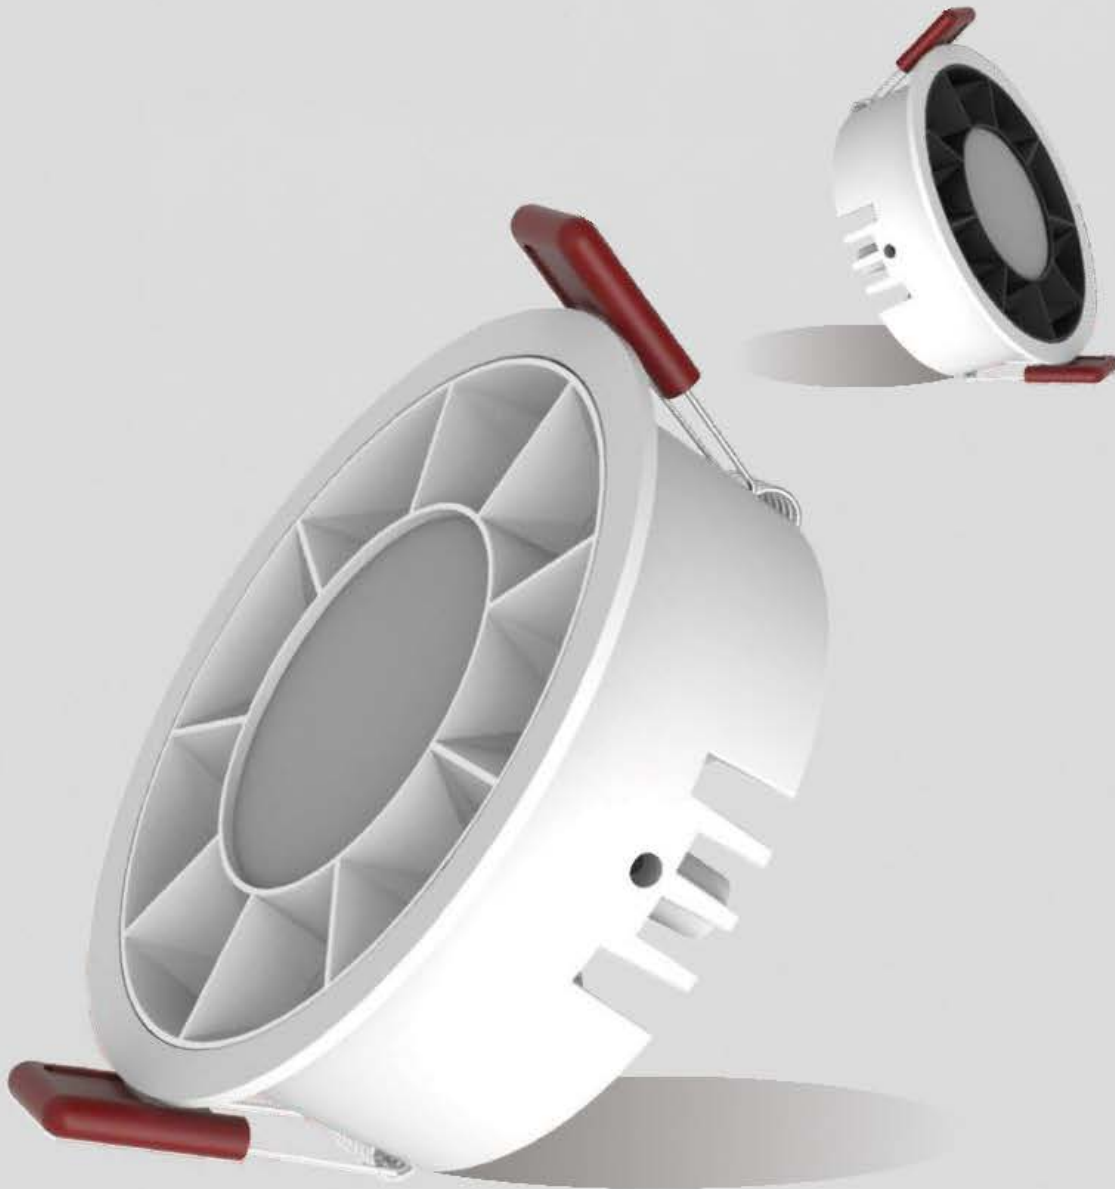


DBJ GRILLE TUBE SPOTLIGHT SERIES



The lamp body is made of new aluminum alloy material, which has better heat dissipation, and the face ring adopts anodized surface treatment process; the face ring is diversified, Support a variety of different types of face ring parts to meet different lighting needs in different places;

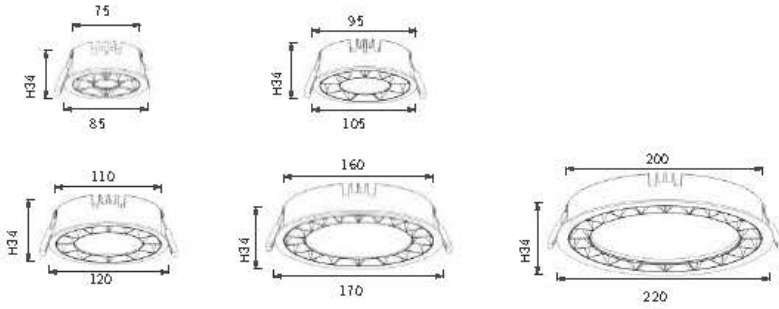

CCT 2700, 3000, 3500, 4000, 5700
 Beam Angle 20° 45°
 Input Voltage 220-240V ~ 50/60Hz
 Optional Color for Cover

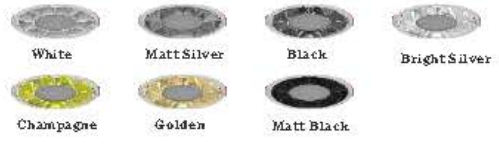

Power	Dimension	Outout	Chip Brand	Driver Brand
10-12W	85*H34mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	105*H34mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	120*H34mm	110mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-36W	170*H34mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
40-45W	220*H34mm	200mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips



Angle: 25.96° 84W

Height	Diameter
1.219m / 698.8 in	89.48cm / 351.9 in
2m / 228.0 in	170.76cm / 672.3 in
3m / 342.0 in	256.14cm / 1008.4 in
4m / 456.0 in	341.52cm / 1344.5 in
5m / 570.0 in	426.90cm / 1680.6 in


Angle: 45.64° 94W



Height	Diameter
1.219m / 719.8 in	126.11cm / 496.5 in
2m / 787.1 in	210.18cm / 828.3 in
3m / 1180.7 in	315.27cm / 1241.3 in
4m / 1574.2 in	420.36cm / 1654.2 in
5m / 1967.8 in	525.44cm / 2067.1 in

WALL WASHER SERIES

WSI WALL WASHER SERIES

The lamp body is made of new aluminum alloy material with better heat dissipation, and the surface ring adopts anodizing surface treatment process; the surface ring is diversified, supporting various types of surface ring parts, meeting different lighting needs in different places; Improve the three-dimensional optical simulation analysis and anti glare design of the mirror;






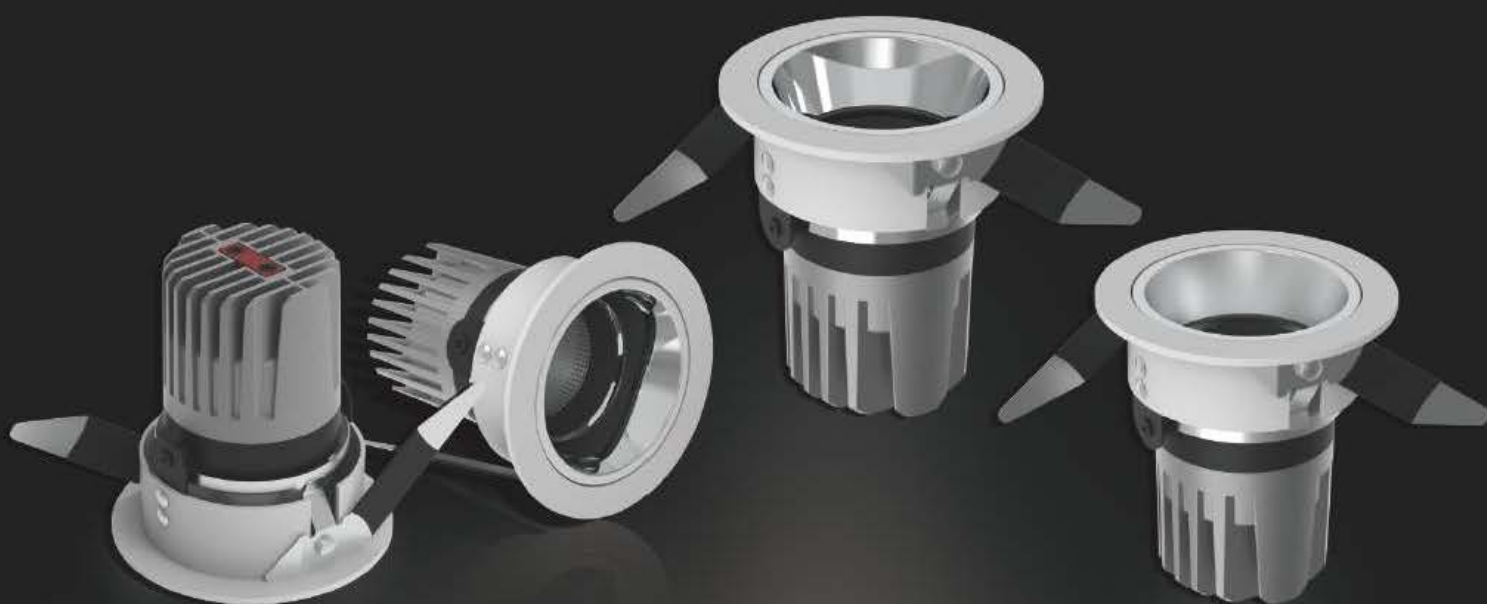


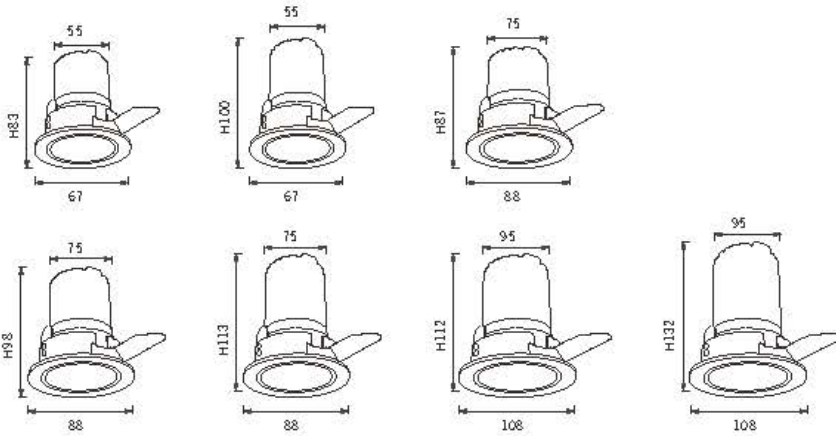

CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz
 Optional Color for Cover



Power	Dimension	Output	Chip Brand	Driver Brand
5-7W	67*H83mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
8-10W	67*H100mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	88*H87mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	88*H98mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	88*H113mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	108*H112mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
25-30W	108*H132mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

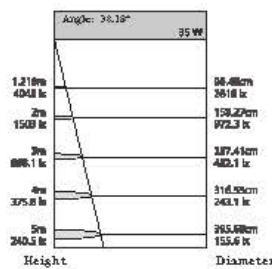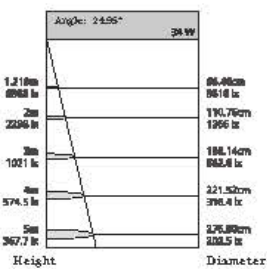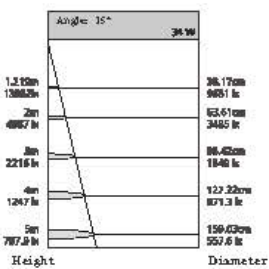





SURFACE MOUNTED DOWNLIGHT

IP65 WATERPROOF DOWNLIGHT SERIES

High color rendering, low light decay, long life
A variety of specifications to meet individual needs
Bright and focused light sense, restore elegant life,
highlight foot tiles, and glow softly





CCT 2700,3000,3500,4000,5700







Beam Angle 15° 30° 45°

Input Voltage 220-240V ~50/60Hz

Optional Color for Cover



Model	Power	Dimension	Chip Brand	Driver Brand
MBG-COBO1	15-18W	73*H108mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
MBG-COBO2	20-25W	93*H118mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
MBG-COBO3	25-30W	113*H136mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
MBG-COBO4	40-50W	140*H150mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips

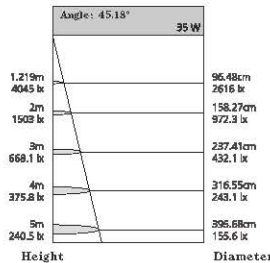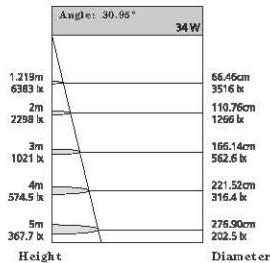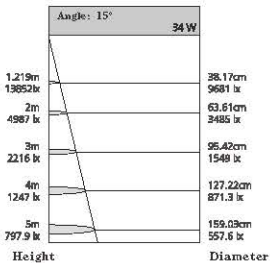

MBS-COB Surface mounted Downlight series

SURFACE MOUNTED DOWNLIGHT



MBS-COB SURFACE MOUNTED DOWNLIGHT SERIES

A variety of specifications, light color optional, bright and focused light sense,
restore life elegance, high brightness foot tile, soft light

Suitable for many places

Easily solve decoration troubles, clothing stores, home, large stores, other places



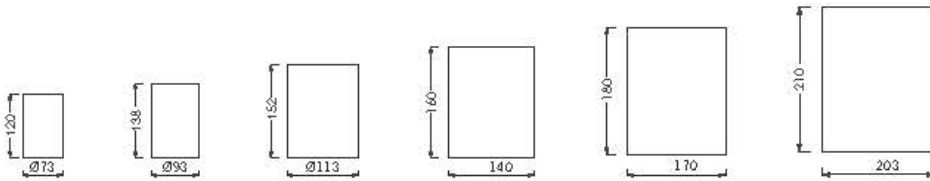

CCT 2700,3000,3500,4000,5700





Beam Angle 24° 45°

Input Voltage 220-240V ~50/60Hz

Optional Color for Cover



Model	Power	Dimension	Chip Brand	Driver Brand
MBS-COB001	15-18W	73*H120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
MBS-COB002	20-25W	93*H138mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
MBS-COB003	25-30W	113*H152mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
MBS-COB004	40-50W	140*H160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
MBS-COB006	50-60W	170*H180mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
MBS-COB008	60-100W	203*H210mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

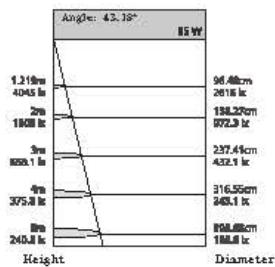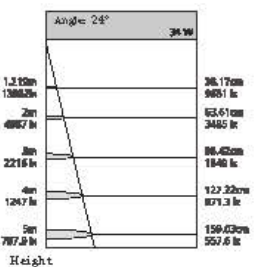

SPOR-COB Spotlight Series

COB SPOTLIGHT SERIES

SPOR-COB SPOTLIGHT SERIES


Die cast aluminum lamp body has fast heat dissipation and long service life

The forming process has strong heat dissipation and high precision

Deep hiding anti dazzle design is not dazzling

Deep light source, deep cup design, no glare, accurate focusing and comfortable lighting



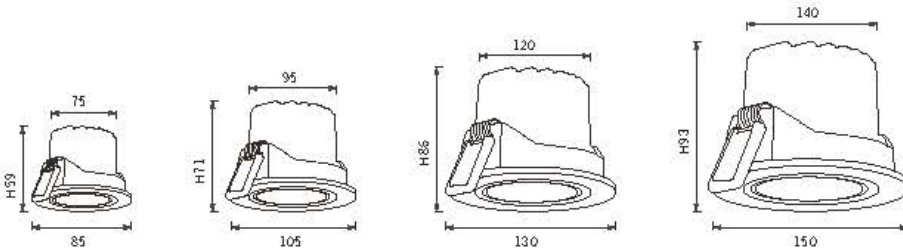

CCT 2700,3000,3500,4000,5700





Beam Angle 24° 45°

Input Voltage 220-240V ~50/60Hz

Optional Color for Cover



Power	Dimension	Outout	Chip Brand	Driver Brand
10-12W	85*H59mm	75mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips
15-18W	105*H71mm	95mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	130*H86mm	120mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	150*H93mm	140mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips

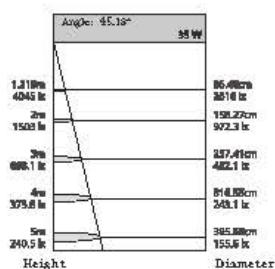
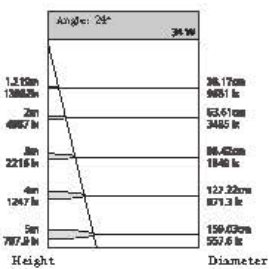




COB SPOTLIGHT SERIES

SPOS-COB SPOTLIGHT SRIES

Highlight quality life, restore true color

Control different scenes, flexibly compatible with various spaces






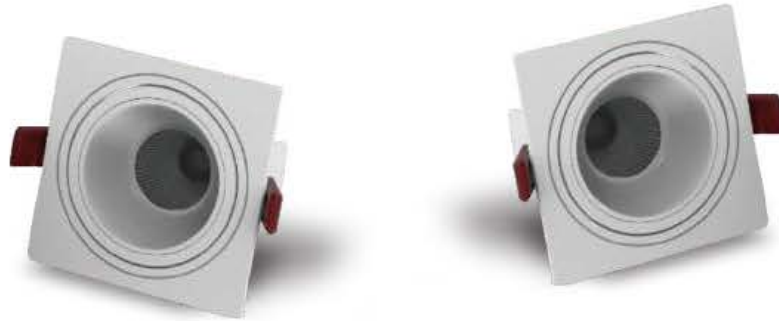


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 30° 45°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
10-12W	L92*W92*H59mm(1)	L75*W75mm	Bridgelux/Cree/Osram	Eaglerise/Ke gu/Philips
15-18W	L120*W120*H71mm(1)	L95*W95mm	Bridgelux/Cree/Osram	Eaglerise/Ke gu/Philips
20-25W	L139*W139*H86mm(1)	L120*W120mm	Bridgelux/Cree/Osram	Eaglerise/Ke gu/Philips

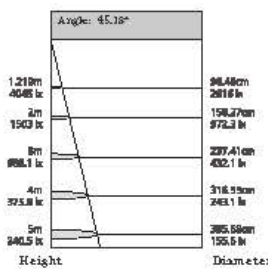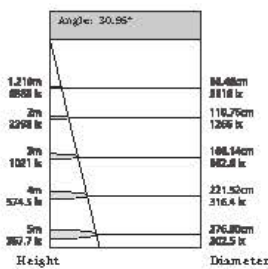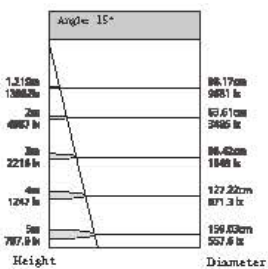





SPOD-COB Spotlight Series

COB SPOTLIGHT SERIES

SPOD-COB SPOTLIGHT SERIES

Bright and focused light sense, restore elegant life, highlight foot tiles, and glow softly.
A variety of specifications to meet individual needs.



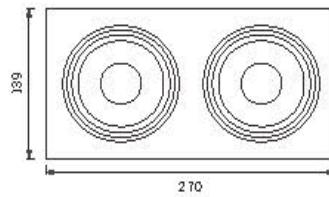
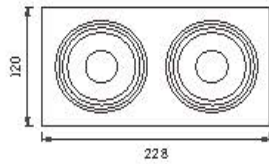

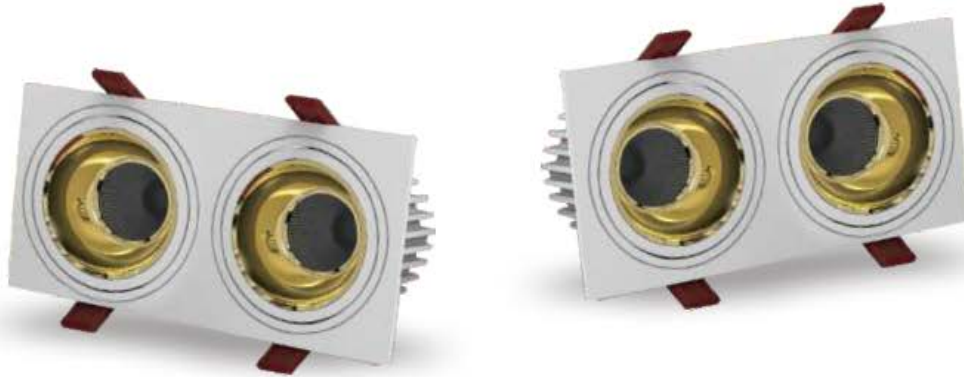


CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 30° 45°
 Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
10-12W	L175*W92*H59mm (2)	L160*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15-18W	L228*W120*H71mm (2)	L205*W95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L270*W139*H86mm (2)	L255*W120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

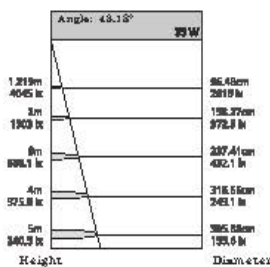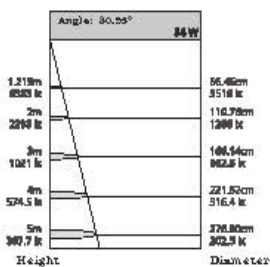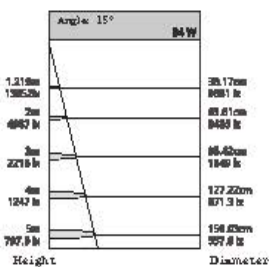


COB SPOTLIGHT SERIES



SPOT-COB SPOTLIGHT SERIES

great heat dissipation due to unique structural design.

High color rendering, restore true colors

High color rendering, low light decay, long life

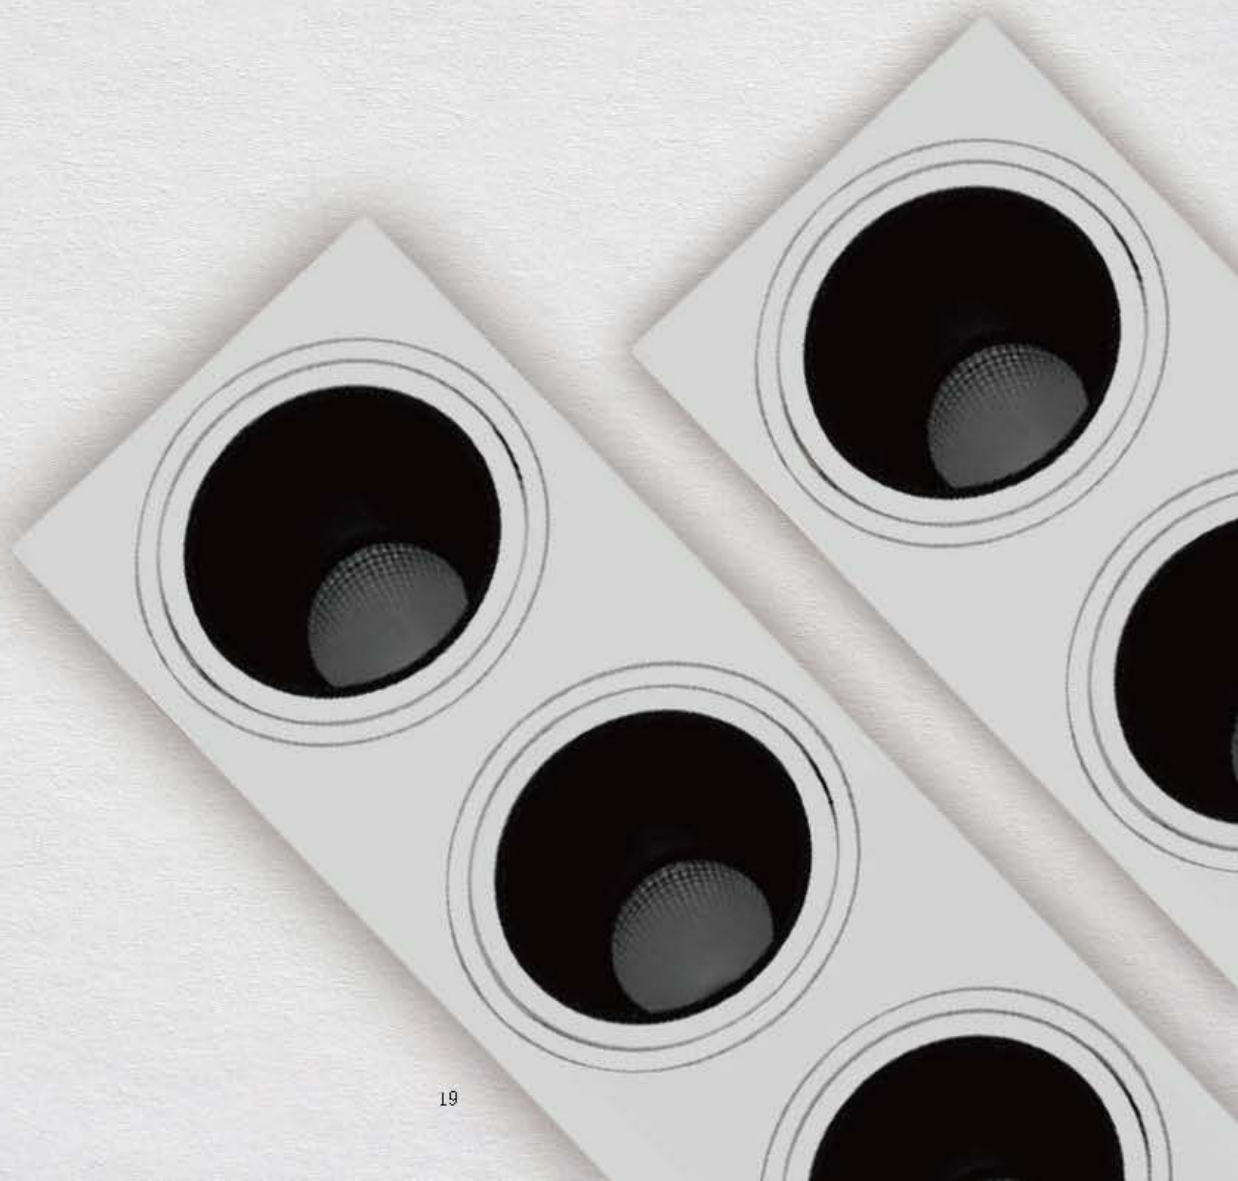


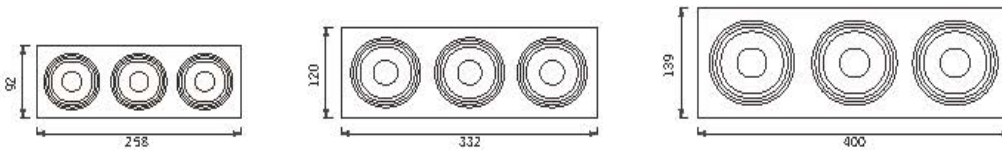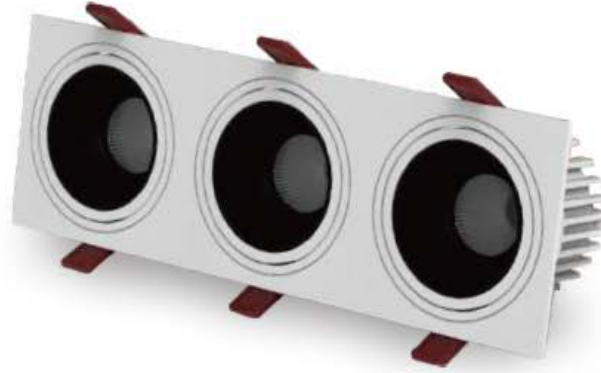

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 30° 45°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
10-12W	L258*W92*H59mm (3)	L250*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15-18W	L332*W120*H71mm (3)	L205*W95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L400*W139*H86mm (3)	L380*W120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

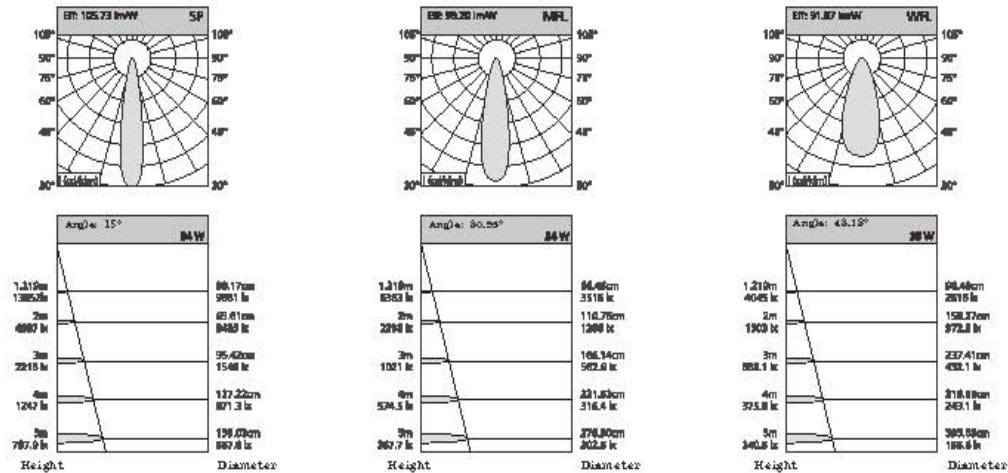


SPY-COB Spotlight Series



IP65

The shell of this series is sealed with silica gel to prevent water from penetrating into the lamp body. The protection level is up to IP65 to ensure the normal operation of the accessories in the harsh environment such as damp.



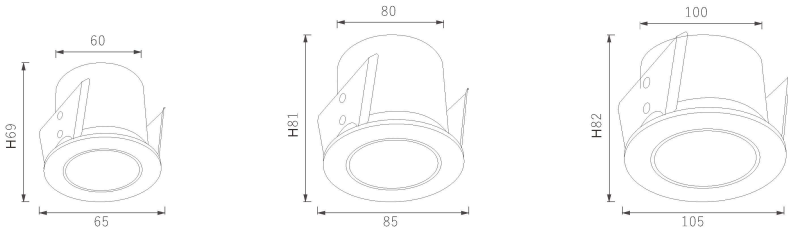

CCT 2700,3000,3500,4000,5700









Beam Angle 13° 24° 38° 60°

Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
6-8W	65*H69mm	60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
10-12W	85*H81mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20-25W	105*H82mm	100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips

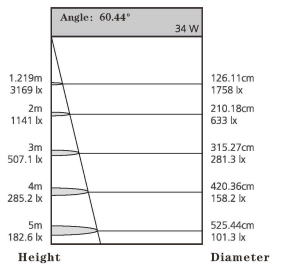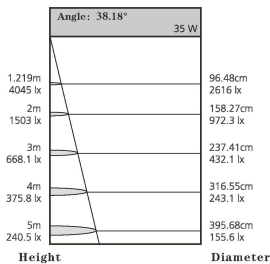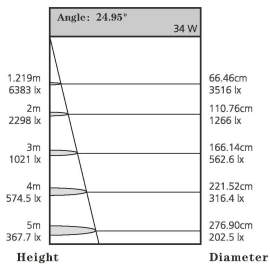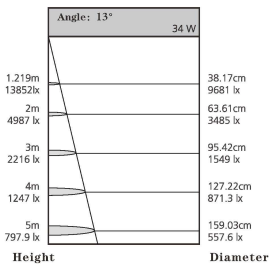


COB SPOTLIGHT SERIES

SPYW-COB SPOTLIGHT SERIES (IP44)

High color rendering, low light decay, long life
A variety of specifications to meet individual needs
Bright and focused light sense, restore elegant life,
highlight foot tiles, and glow softly




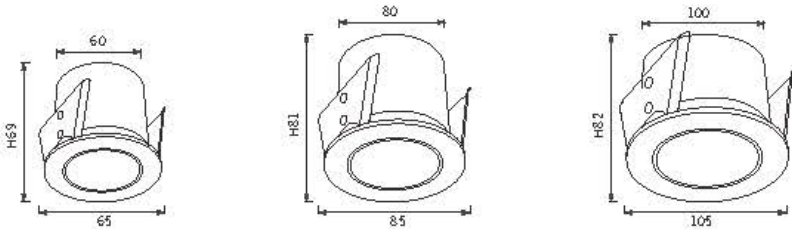

Waterproof spotlight lens type (IP44)

CCT 2700,3000,3500,4000,5700
 Beam Angle 13° 24° 38° 60°
 Input Voltage 220-240V ~50/60Hz
 Optional color for Cover

Power	Dimension	Cutout	Chip Brand	Driver Brand
6-8W	65*H69mm	60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H81mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105*H82mm	100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

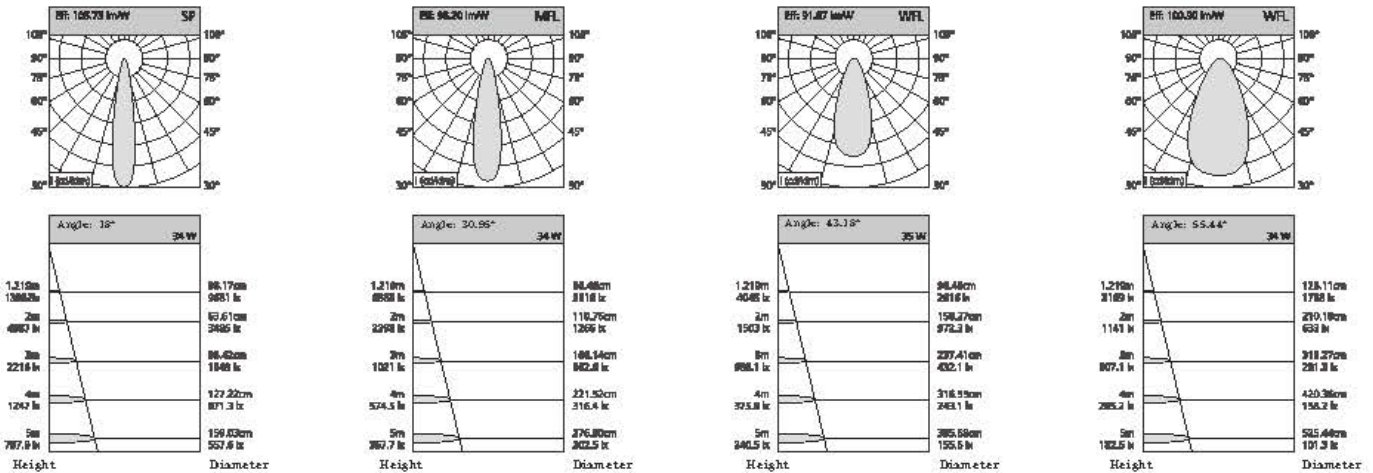

DOWNLIGHT SERIES


DBG DOWNLIGHT SERIES

Multiple size options

6-8W/10-12W/20-25W for optional,

Suitable for indoor spaces below 3-6 meters in height



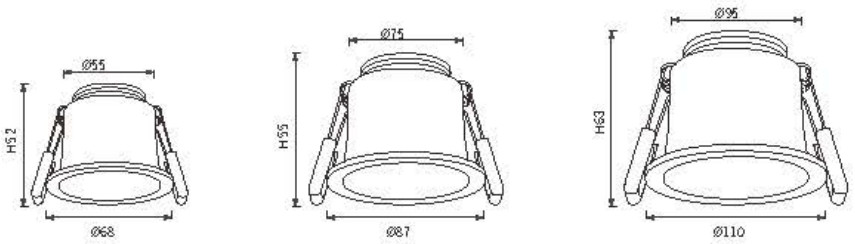

CCT 2700,3000,3500,4000,5700
 Beam Angle 105°
 Input Voltage 220-240V ~50/60Hz
 Optional color for Cover



White

Power	Dimension	Cutout	Chip Brand
6-8W	68*H52 mm	55mm	Bridgelux/Cree/Osram
10-12W	87*H55 mm	75mm	Bridgelux/Cree/Osram
20-25W	110*H63mm	95mm	Bridgelux/Cree/Osram

SPN-COB Spotlight Series



UGR ≈ 19 .

Cellular network can be customized.

**The outer ring and the middle ring are available in three colors:
white + white/white + black/black + black.**




Diffuser plate type



Lens type



Cellular network type

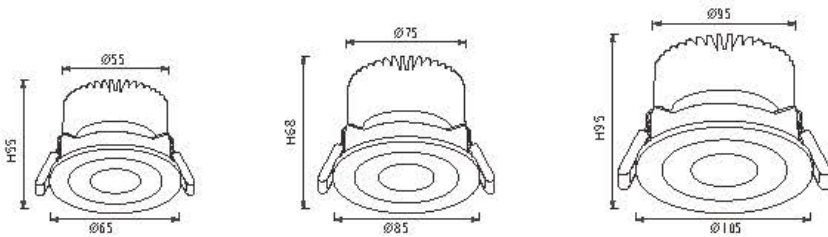

CCT 2700,3000,3500,4000,5700







Beam Angle 15° 24° 38°

Input Voltage 220-240V ~50/60Hz

Optional color for Cover




Power	Dimension	Outout	Chip Brand	Driver Brand
6-8W	65*H55mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H68mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105*H95 mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

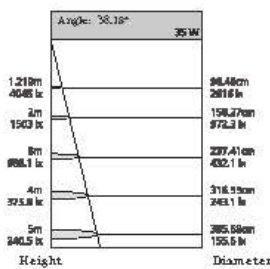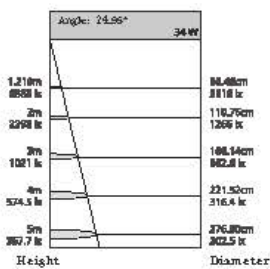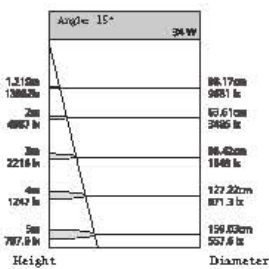

COB SPOTLIGHT SERIES

Light up your beauty



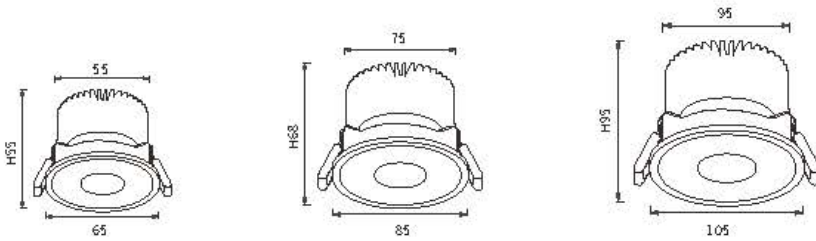

CCT 2700,3000,3500,4000,5700

Beam Angle 15° 24° 38°







Input Voltag 220-240V ~50/60Hz

Optional color for Cover



White+White Black+Black White+Black

Power	Dimension	Outout	Chip Brand	Driver Brand
5-7W	65*H55mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H68mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105*H95 mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

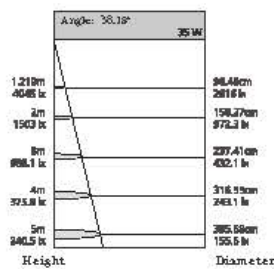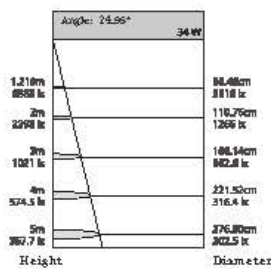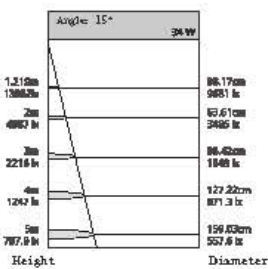




COB SPOTLIGHT SERIES

SPV-COB SPOTLIGHT SERIES

Die cast aluminum lamp body has fast heat dissipation and long service life
The forming process has strong heat dissipation and high precision
Circular heat dissipation and oxidation resistance
Vortex heat sink, good thermal conductivity, high temperature
High strength, good heat resistance, reliable and stable performance









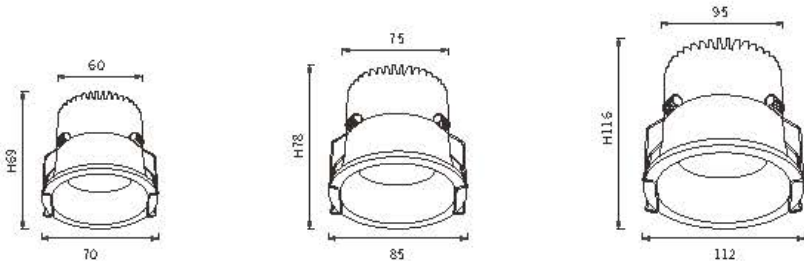

CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz
 Optional color for Cover







Power	Dimension	Cut out	Chip Brand	Driver Brand
5-7W	70*H69mm	60mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H78mm	75mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	112*H116mm	95mm	BridgeLux/Cree/Osram	Eaglerise/Kegu/Philips

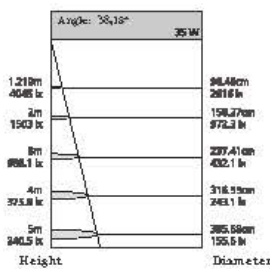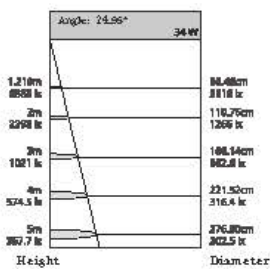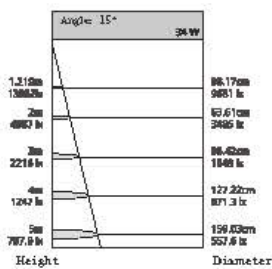


COB SPOTLIG HT SERIES



Angle




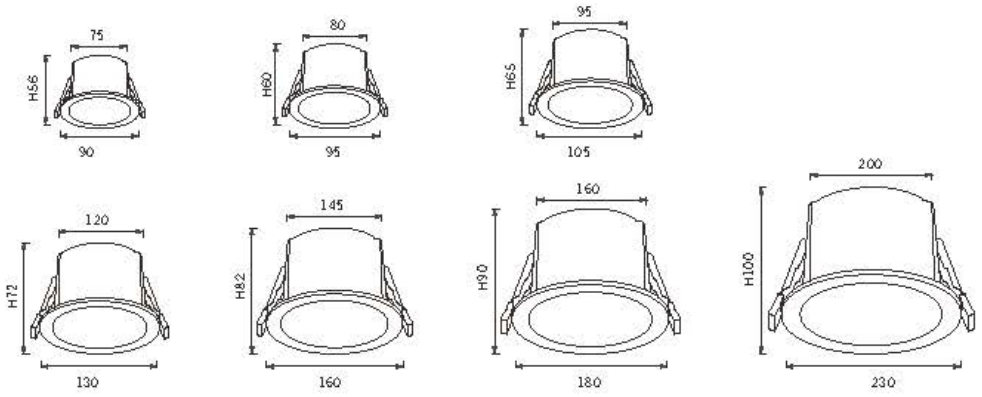

CCT 2700,3000,3500,4000,5700
Beam Angle 13° 24° 38° 60°
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Outout	Chip Brand	Driver Brand
SPA-COB10	10-12W	90*H56mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB12	12-15W	95*H60mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB15	15-18W	105*H64mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB18	18-20W	130*H72mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB30	30-35W	160*H82mm	145mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB40	40-45W	180*H90mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB50	50-60W	230*H100mm	200mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

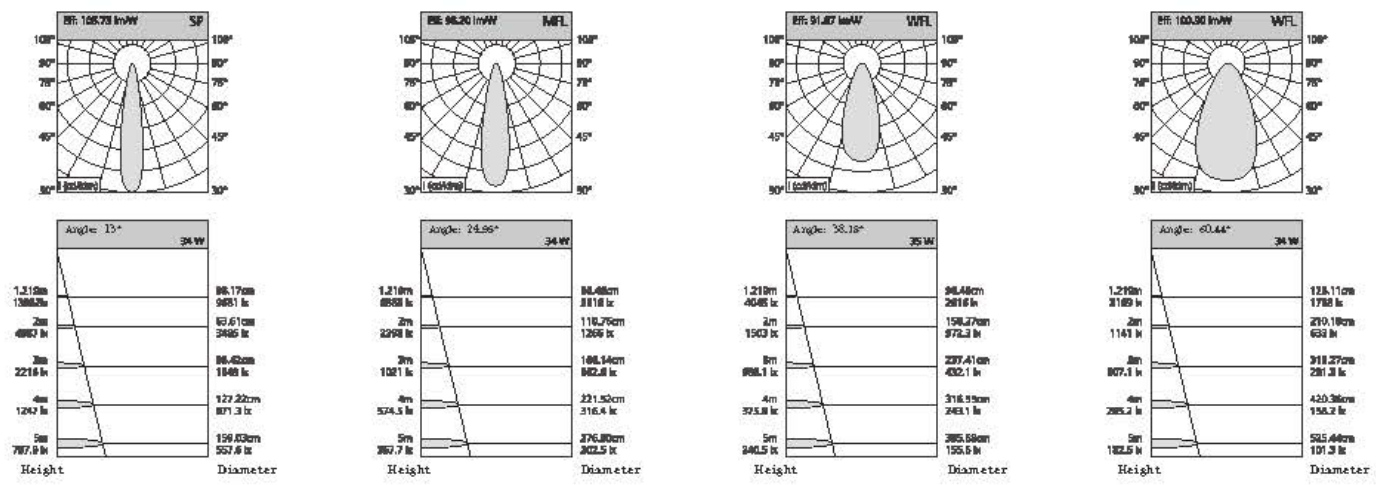



SPA-SMD downlight series (Double-color Shell)

SMD DOWNLIGHT SERIES

SPA-SDM DOWNLIGHT SERIES (Double-color Shell)

Great heat dissipation due to unique structural design.
Metal buckle design, strong elastic force, simpler installation and safer use





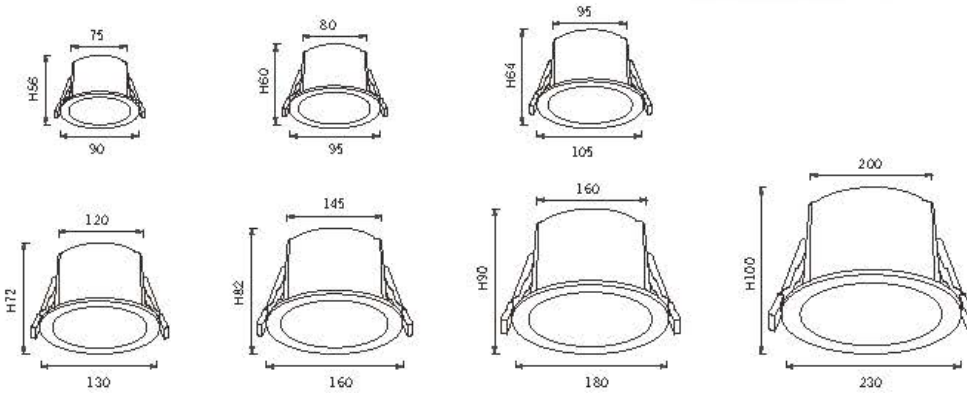

CCT 2700,3000,3500, 4000,5700
Beam Angle 60° (SMD)
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Cutout	Chip Brand	Driver Brand
SPA-SMD10	10-12W	90*H56mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD12	12-15W	95*H60mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD15	15-18W	105*H64mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD18	18-20W	130*H72mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD30	30-35W	160*H82mm	145mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD40	40-45W	180*H90mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD50	50-60W	230*H100mm	200mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

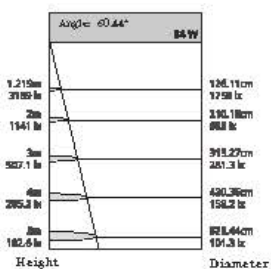


SPA-COB Spotlight Series (Single-color Shell)

COB SPOTLIGHT SERIES

SPA-COB Spotlight Series (Single-color Shell)

Die cast aluminum lamp body has fast heat dissipation and long service life
The forming process has strong heat dissipation and high precision
Circular heat dissipation and oxidation resistance
Vortex heat sink, good thermal conductivity, high temperature
High strength, good heat resistance, reliable and stable performance




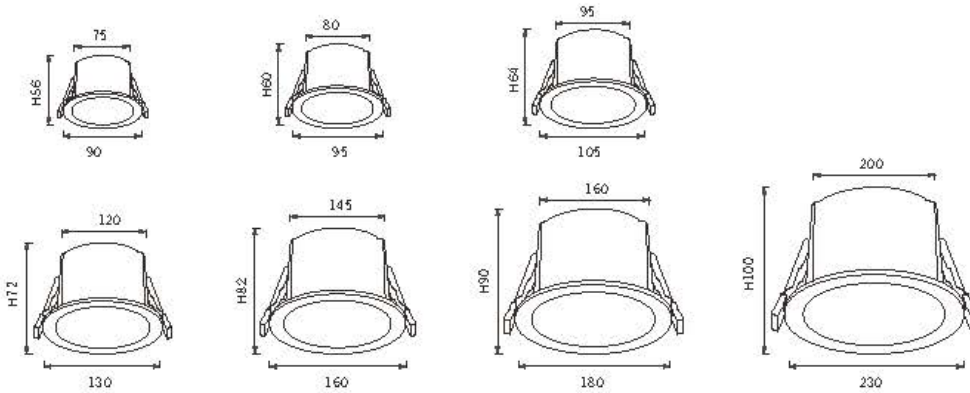

CCT 2700,3000,3500,4000,5700
Beam Angle 13° 24° 38° 60°
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Output	Chip Brand	Driver Brand
SPA-COB10S	10-12W	90*H56mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB12S	12-15W	95*H60mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB15S	15-18W	105*H64mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB18S	18-20W	130*H72mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB30S	30-35W	160*H82mm	145mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB40S	40-45W	180*H90mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-COB50S	50-60W	230*H100mm	200mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

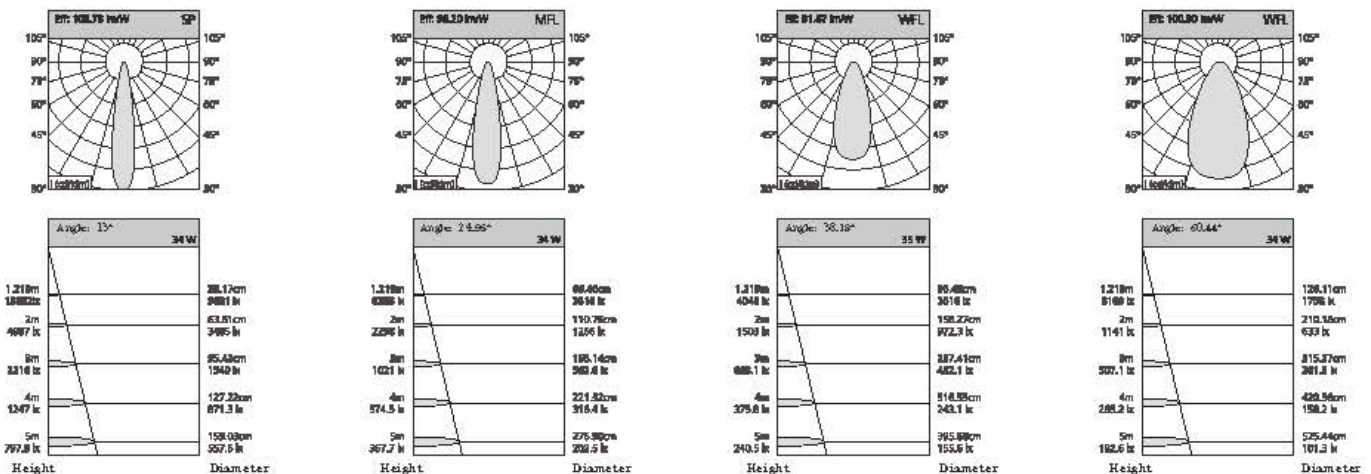



SPA-SMD Downlight Series(Single-color Shell)

SMD DOWNLIGHT SERIES



SPA-SMD Downlight Series(Single-color Shell)

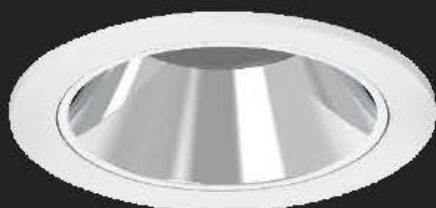


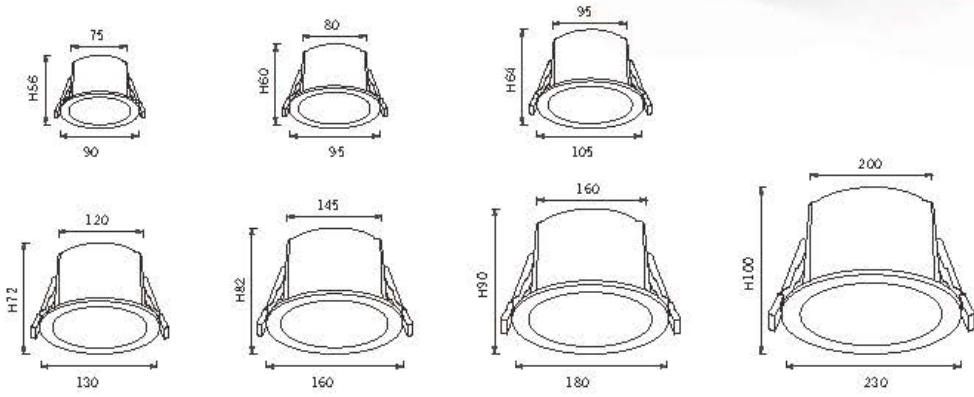

CCT 2700,3000,3500,4000,5700
Beam Angle 60° (SMD)
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Outout	Chip Brand	Driver Brand
SPA-SMD10S	10-12W	90*H56mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD12S	12-15W	95*H60mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD15S	15-18W	105*H64mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD18S	18-20W	130*H72mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD30S	30-35W	160*H82mm	145mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD40S	40-45W	180*H90mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPA-SMD50S	50-60W	230*H100mm	200mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

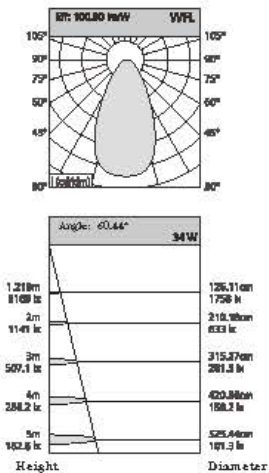

SPT-ZOOM COB Spotlight Series




COB SPOTLIGHT SERIES

SPT-ZOOM COB SPOTLIGHT SERIES

Precise light control, good concentration, high light transmittance, accurate light output angle and round spot



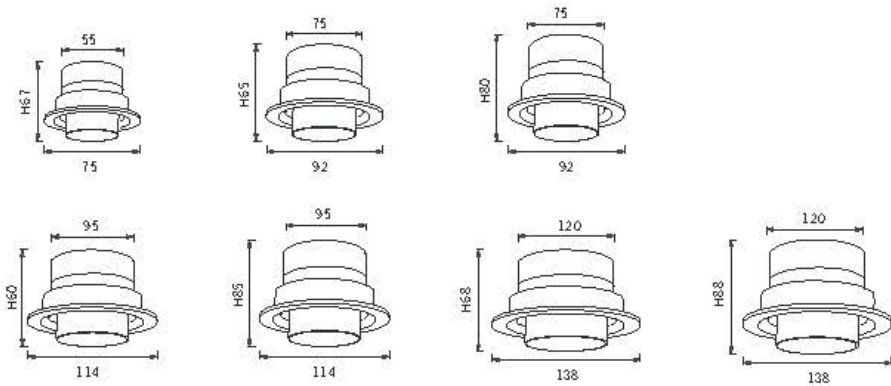

Power	Dimension	Output	Chip Brand
5-7W	75 * H67mm	55mm	Bridgelux/Cree/Osram
5-7W	92 * H65mm	75mm	Bridgelux/Cree/Osram
10-12W	92 * H80mm	75mm	Bridgelux/Cree/Osram
10-15W	114 * H60mm	95mm	Bridgelux/Cree/Osram
20-25W	114 * H85mm	95mm	Bridgelux/Cree/Osram
20-25W	138 * H68mm	120mm	Bridgelux/Cree/Osram
30-35W	138 * H88mm	120mm	Bridgelux/Cree/Osram



CCT 2700,3000,3500,4000,5700
 Beam Angle 15-60°
 Input Voltage 220-240V ~50/60Hz

Optional color for Cover






SPU-ZOOM COB Spotlight Series

COB SPOTLIGHT SERIES

SPU-ZOOM COB SPOTLIGHT SERIES





CCT 2700,3000,3500,4000,5700
Beam Angle 15° -60°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover



White+Black

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	75*H48mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
5-7W	92*H44mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	92*H60mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips


COB SPOTLIGHT SERIES



High CRI

Viewed directly without glare, See the lights but not the lamps

Using deep black light anti-glare reflector, effectively filtering glare 60° direct vision without glare
Protect eyesight and avoid visual fatigue.



Direct view of light absorbing material

60°

24°



CRI > 90
High CRI



CRI < 80
Low CRI



2700K 3000K 3500K 4000K 5500K 6000K
CCT: ±100K

1. Diverse collocation

*There are three kinds of irradiation methods: downlight, adjustment and wall washing to meet the needs of different application scenarios;
*Three beam angles: 15° 24° 36° make the illumination more precise and delicate;
*A variety of face ring accessories to meet different decoration styles.



2. Cooling system

The direct and simple heat dissipation design, combined with the physical principle, forms the exhaust type heat dissipation; effectively dissipates the chip heat, ensures the reasonable thermal performance of the lamp body, maximum indication and long service life.

3. Deep anti glare

*The light source is deep, the light can not be seen, the angle of 40° shading is less than 9, which is far lower than the industry standard UGR < 19;

*The black light reflector designed for the integrated LED light source can greatly reduce the scattered light and make the vision more comfortable.






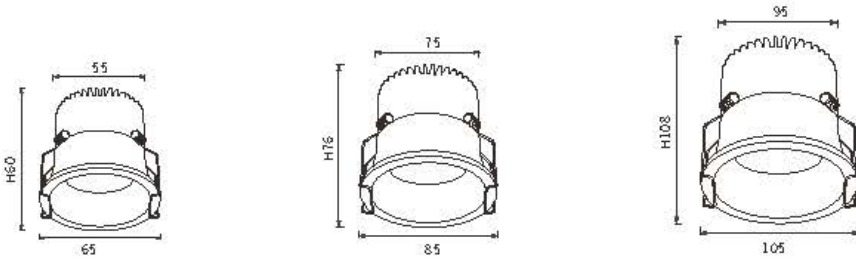


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover





Power	Dimension	Cut-out	Chip Brand	Driver Brand
5-7W	65*H60mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
10-12W	85*H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20-25W	105*H108mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips

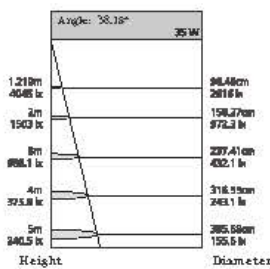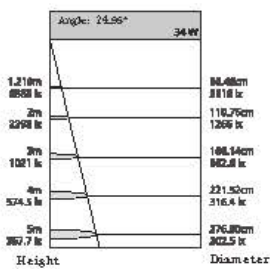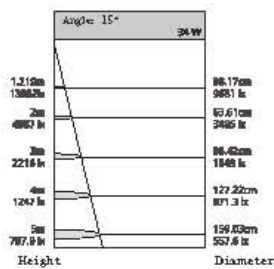

COB SPOTLIGHT SERIES

Uniform spot, from 100%-20% light intensity, there is no particularly obvious contrast between light and dark. Because of the soft light double-reverse technology, the gradient effect of the light spot is perfect and natural.






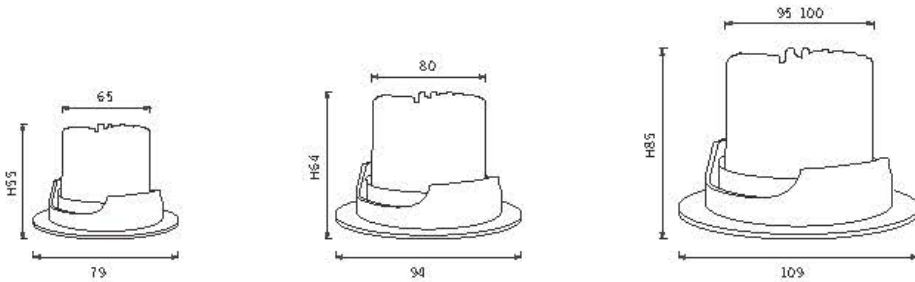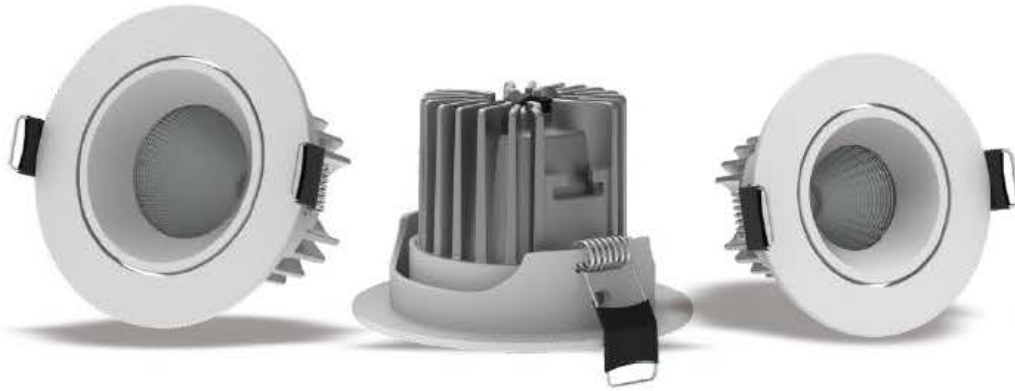

CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	79*H55mm	65mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
10-12W	94*H64mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20-25W	109*H85mm	95-100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips

Optional color for Cover



Angle: 15° 34 W

Height	Diameter
1.219m	98.17cm
1.2852m	9961 lx
2m	88.61cm
4987 lx	3469 lx
3m	85.42cm
2215 lx	1588 lx
4m	177.20cm
1247 lx	871.3 lx
5m	158.07cm
787.8 lx	887.8 lx

Angle: 24.95° 34 W

Height	Diameter
1.219m	66.46cm
9303 lx	3516 lx
2m	110.78cm
2258 lx	1286 lx
3m	166.54cm
1081 lx	502.8 lx
4m	221.53cm
574.5 lx	316.4 lx
5m	276.80cm
387.7 lx	202.8 lx


Angle: 38.15° 35 W

Height	Diameter
1.219m	96.46cm
4045 lx	2816 lx
2m	188.27cm
1903 lx	572.3 lx
3m	237.41cm
888.1 lx	402.1 lx
4m	318.55cm
393.8 lx	243.1 lx
5m	385.68cm
340.7 lx	195.8 lx

COB SPOTLIGHT SERIES

SPQ-COB SPOTLIGHT SERIES



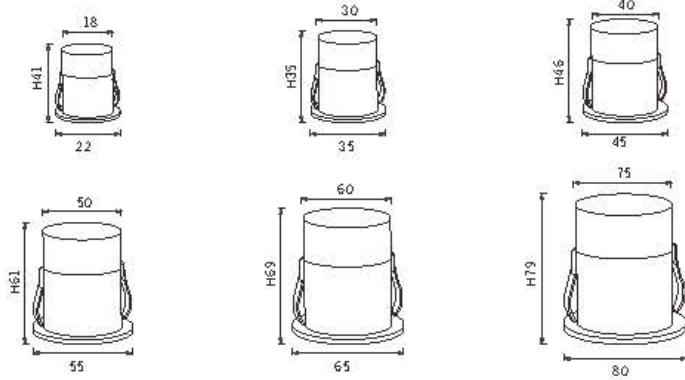

Power	Dimension	Cutout	Chip Brand	Beam Angle	Driver Brand
1W	22*H41mm	18mm	Bridgelux/Cree/Osram	15° 24° 38°	Eaglerise/Kegu/Philips
2W	35*H38mm	30mm	Bridgelux/Cree/Osram	10° 25° 40°	Eaglerise/Kegu/Philips
3W	45*H46mm	40mm	Bridgelux/Cree/Osram	5° 8° 10° 25° 40°	Eaglerise/Kegu/Philips
5W	55*H61mm	50mm	Bridgelux/Cree/Osram	15° 24° 38° 60°	Eaglerise/Kegu/Philips
7W	65*H69mm	60mm	Bridgelux/Cree/Osram	15° 24° 38° 60°	Eaglerise/Kegu/Philips
10 W	80*H79mm	75mm	Bridgelux/Cree/Osram	15° 24° 38° 60°	Eaglerise/Kegu/Philips



CCT 2700,3003500,4000,5700

Input Voltage 220-240V ~ 50/60Hz

Optional color for Cover



COB WALL WASHER SERIES

WSR-COB WALL WASHER SERIES



Deep anti-glare, different reflectors create different light effects to easily match various scene needs.

The use of the reflector cup and the reflector, after the emitted light is refracted to the reflector rod through the transparent cup and reflector, the light can reach the high standard comfort level of $URG \leq 16$, which greatly reduces the generation of glare and improves the user's comfortable experience.



 High Efficiency	HIGH CRI CRI > 95	IP20 IP RATE	 Aviation Grade Aluminum	 radiation-free
 Anti-glare	 Efficient Heat Dissipation	 Long life	 Suitable for Low Ceilings	 Anodizing
 Professional Light Distribution	 Different sizes for optional	 Beautiful Installation	 High Illumination	 Easy to Install



COB WALL WASHER SERIES


WSR-COB WALL WASHER SERIES

Diversified face rings, support a variety of different types of face ring parts, meet the Different lighting needs in different places;

Improve the 3D optical simulation analysis and anti-glare design of mirrors;

Independent isolated power supply, safe and stable;









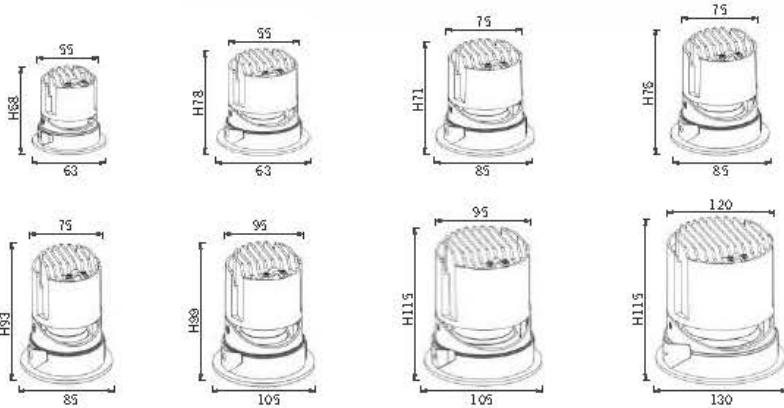

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Outout	Chip Brand	Driver Brand
5-7W	63*H68mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	63*H78mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	85*H71mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	85*H93mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105*H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	105*H115mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	130*H115mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for cover

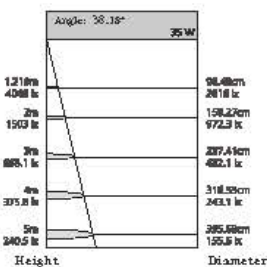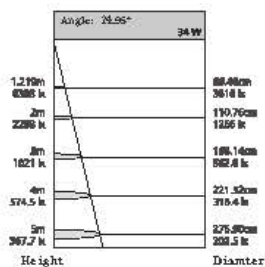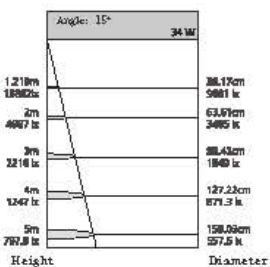



WSR-COB Wall Washer Series

COB WALL WASHER

WSR-COB Wall Washer Series

Circular light outlet--circular light spot, accurate light distribution as always



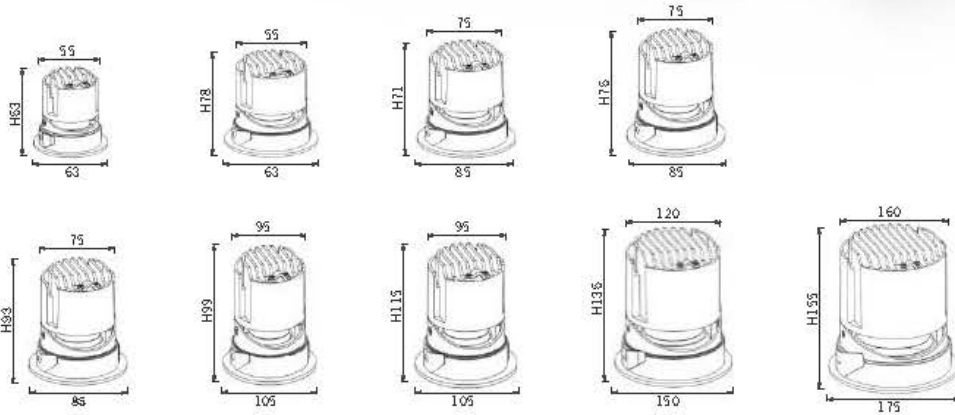


Power	Dimension	Outout	Clip Brand	Driver Brand
5-7W	63*H63mm	55mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
10-12W	63*H78mm	55mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
7-8W	85*H71mm	75mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
10-12W	85*H76mm	75mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
18-20W	85*H93mm	75mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
20-25W	105*H99mm	95mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
30-35W	105*H115mm	95mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
30-35W	130*H115mm	120mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
40-60W	150*H136mm	140mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
60-100W	175*H155mm	160mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips



CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Optional Color for Cover

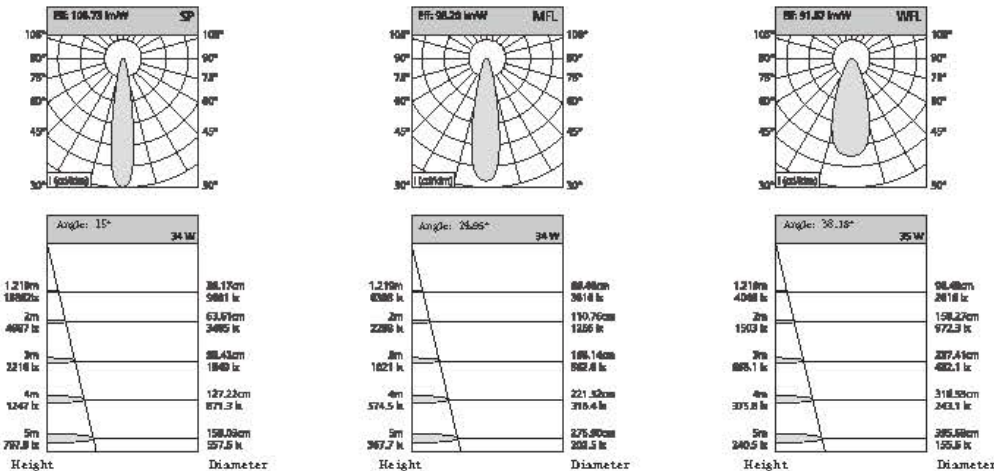



COB WALL WASHER SERIES

WSR-COB WALL WASHER SERIES

Bright and Soft

Professional optical design makes the light more brighter, and the visual effect is soft and comfortable.
Anti-fog PMMA optical lens, filter harsh light, make the light soft and feel comfortable.



High Quality LED Wall Washer Bad Quality LED Wall Washer



High CRI Low CRI

Lightweight and flexible

The integrated shell design is suitable for various commercial occasions.



Quality Assurance

High-quality materials, green and environmental protection.

Smart IC is the heart of downlights and the most important part of LED lamps. It has overload protection, short circuit protection, under-voltage protection lamp function, constant current voltage regulation, longer lamp life.



High Quality LED Wall Washer

VS



Bad Quality LED Wall Washer



No change after half a year



No change after 2 years



Lighter after 1 year






Lighter after half a year



▶ To make accurate color comparison, please use a color calibration chart. ▶ Bad Quality LED Wall Washer has lower brightness and efficiency of 70% compared to the same size.

Long-term use

Long service life and superior light efficiency not only save energy and protect the environment, but also reduce input costs and expenses.
10,000 hours of service life, more than 3 years of use.

Selection Example:







	High Quality LED Wall Washer	Energy saving about 50% 35,000 hours of life, more than 5 years of use (System efficiency is 1.00lm/W)
	Energy-saving lamp	Energy saving about 75% 20,000 hours of life, equivalent to only one and a half years (System efficiency is 0.40lm/W)
	Investment lamp	

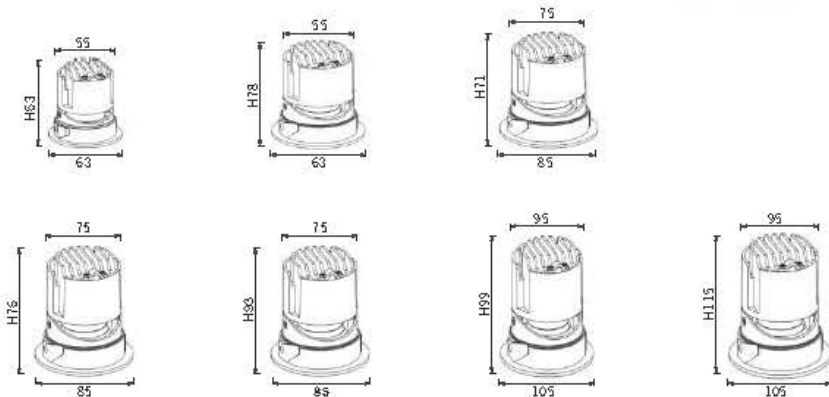

CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	63*H63 mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	63*H78mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	85*H71 mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H76 mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	85*H93 mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105*H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	105*H115mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional Color for Cover

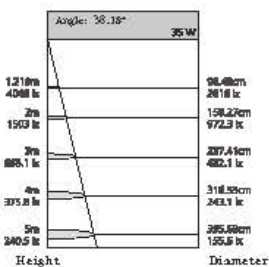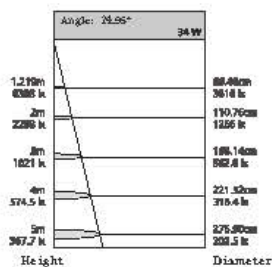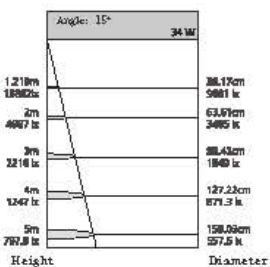


WSR-COB Wall Washer Series

COB WALL WASHER SERIES

WSR-COB WALL WASHER SERIES

Precise light control, good concentration, high light transmittance,
accurate light output angle and round spot



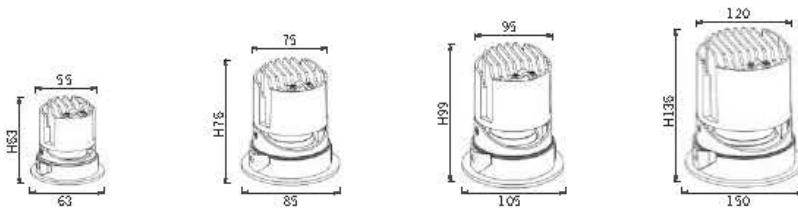

CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	63*H63 mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85*H76 mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105*H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	130*H115mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips



Optional Color for Cover




COB WALL WASHER SERIES

WSR-COB WALL WASHER SERIES

Diversified face rings, support a variety of different types of face ring parts, meet the Different lighting needs in different places;
Improve the 3D optical simulation analysis and anti-glare design of mirrors;
Independent isolated power supply, safe and stable;

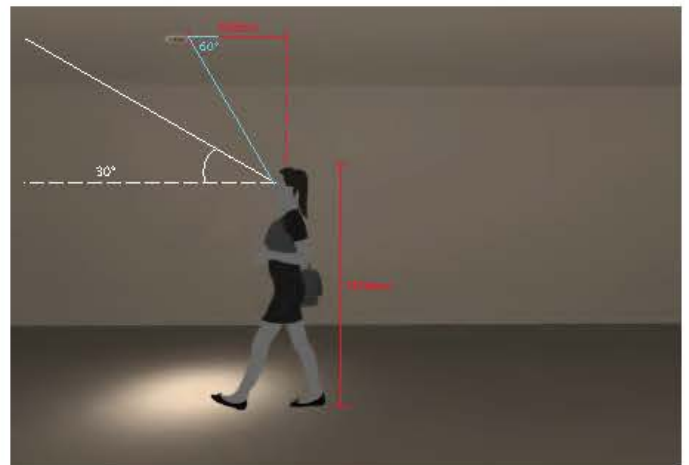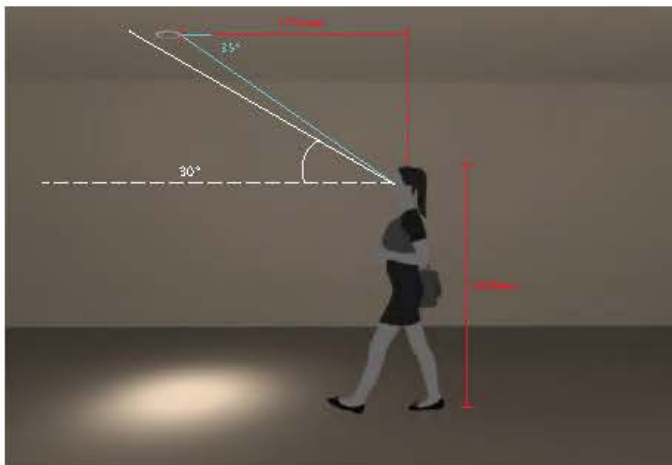


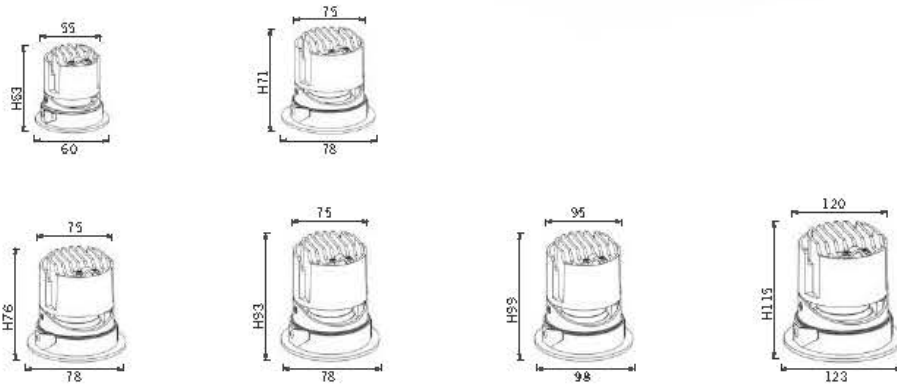


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	60*H63 mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	78*H71mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	78*H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	78*H83mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	98*H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	123*H115mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips


Optional Color for Cover



Height	Diameter
1.219m	36.17cm
1.892m	50.81 lc
2m	63.91cm
4m	127.22cm
5m	158.03cm



Height	Diameter
1.219m	66.48cm
2m	110.76cm
2m	188.14cm
4m	376.28cm
5m	465.35cm










Height	Diameter
1.219m	96.48cm
2m	158.27cm
2m	237.41cm
4m	474.82cm
5m	593.53cm

COB WALL WASHER SERIES

Small aperture, wide width angle

UGR<16, H63mm, Adapt to more installation space






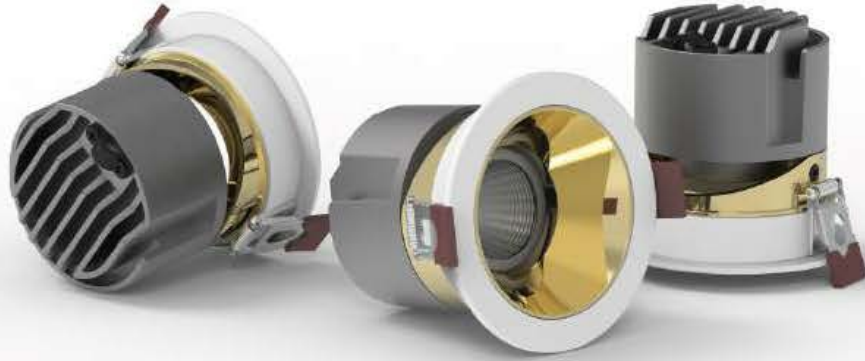

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	63 * H63 mm	58mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	85 * H71mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	85 * H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	85 * H93mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	105 * H99 mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	130 * H115mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional Color for Cover



Angle: 15° 34 W

Height	Diameter
1.21m	98.17cm
1.065m	86.81 lx
2m	83.61cm
4.082 lx	94.85 lx
2m	95.42cm
221.9 lx	15.49 lx
4m	127.22cm
124.7 lx	801.3 lx
5m	158.85cm
787.9 lx	557.8 lx

Angle: 24.95° 34 W

Height	Diameter
1.21m	66.45cm
68.92 lx	351.9 lx
2m	118.26cm
228.8 lx	128.8 lx
5m	168.14cm
1021 lx	562.5 lx
4m	221.85cm
534.5 lx	316.4 lx
5m	278.95cm
862.7 lx	282.5 lx


Angle: 38.15° 38 W

Height	Diameter
1.21m	95.49cm
404.5 lx	331.6 lx
2m	138.27cm
972.3 lx	972.3 lx
3m	187.41cm
688.1 lx	483.1 lx
4m	218.85cm
378.8 lx	248.1 lx
5m	278.95cm
243.5 lx	395.68cm
	155.6 lx

COB WALL WASHER SERIES

WSR-COB(DIRECT) WALL WASHER SERIES







The face ring is diversified, supporting a variety of different types of facing parts to meet different lighting needs in different places;
Improve the 3D optical simulation analysis and anti-glare design of mirrors;
Independent isolated power supply, safe and stable;

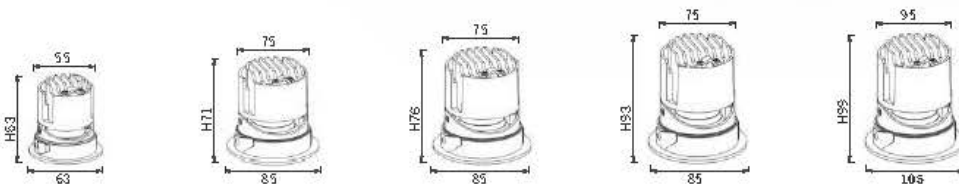

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	63 * H63mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
7-8W	85 * H71mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
10-12W	85 * H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
18-20W	85 * H93mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20-25W	105 * H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips

Optional Color For Cover

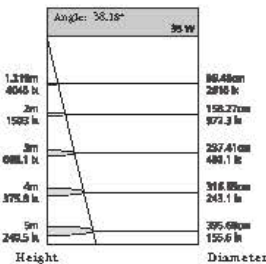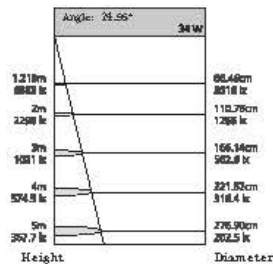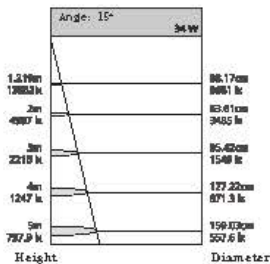







WSR-COB(Square)Wall Washer Series



COB WALL WASHER SERIES

WSR-COB(SQUARE) WALL WASHER SERIES











CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional Color For Cover



Power	Dimension	Output	Chip Brand	Driver Brand
5-7W	L63*W63*H63mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	L85*W85*H71mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	L85*W85*H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	L85*W85*H93mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L105*W105*H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	L130*W130*H115mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

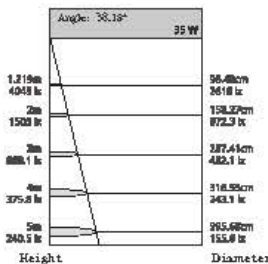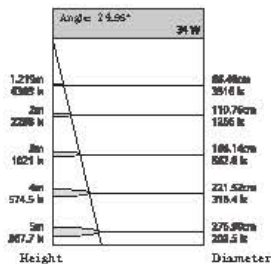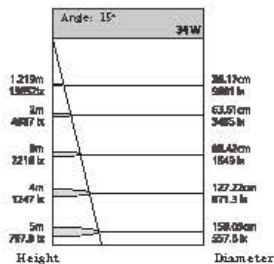

COB WALL WASHER SERIES

WRS-COB(ASYMMETRICAL)WALL WASHER SERIES


The lamp body is made of new aluminum alloy material, which has better heat dissipation, and the face ring adopts anodized surface treatment process; the face ring is diversified,

Support a variety of different types of face ring parts to meet different lighting needs in different places;

Improve the 3D optical simulation analysis and anti-glare design of mirrors;

Independent isolated power supply, safe and stable;

Equipped with imported COB light source with high color rendering effect, it can perfectly restore the true color;

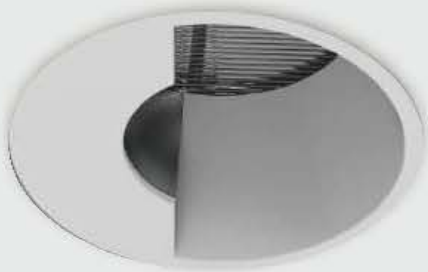


White



Black








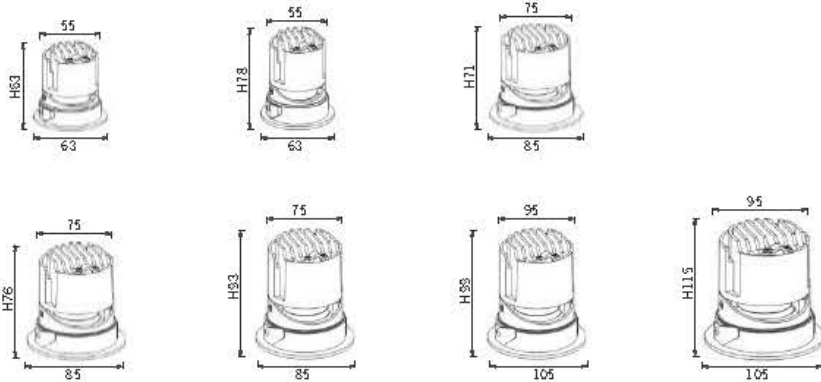


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional Color for Cover





Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	63*H63mm	55mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips
10-12W	63*H78mm	55mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips
7-8W	85*H71mm	75mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips
10-12W	85*H76mm	75mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips
18-20W	85*H93mm	75mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips
20-25W	105*H99mm	95mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips
30-35W	105*H115mm	95mm	Bridgelux/Cree/Osram	Eglerise/Kegu/Philips

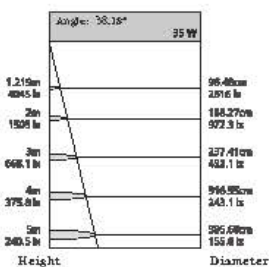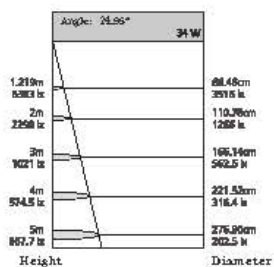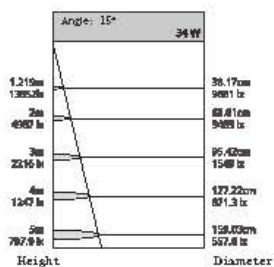

WSR(Frameless) Cob Wall Washer Series

Independent isolated power supply, safe and stable, safe and convenient maintenance

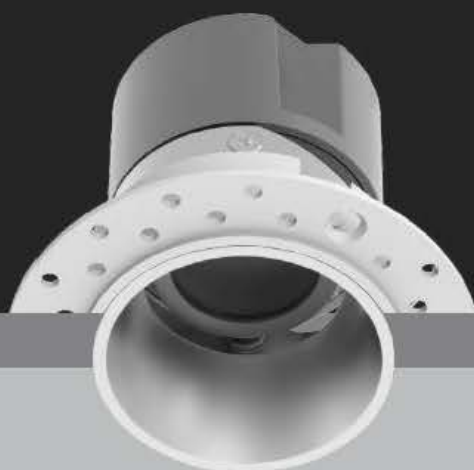


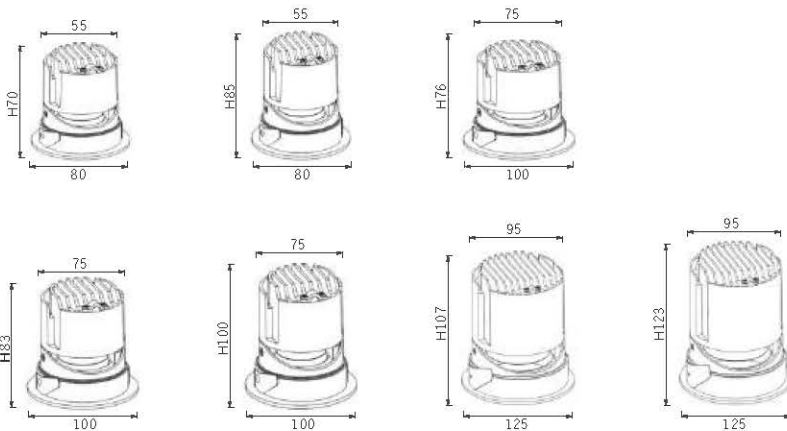

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	80*H70 mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	80*H85 mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	100*H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	100*H83mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	100*H100mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	125*H107mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	125*H123mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

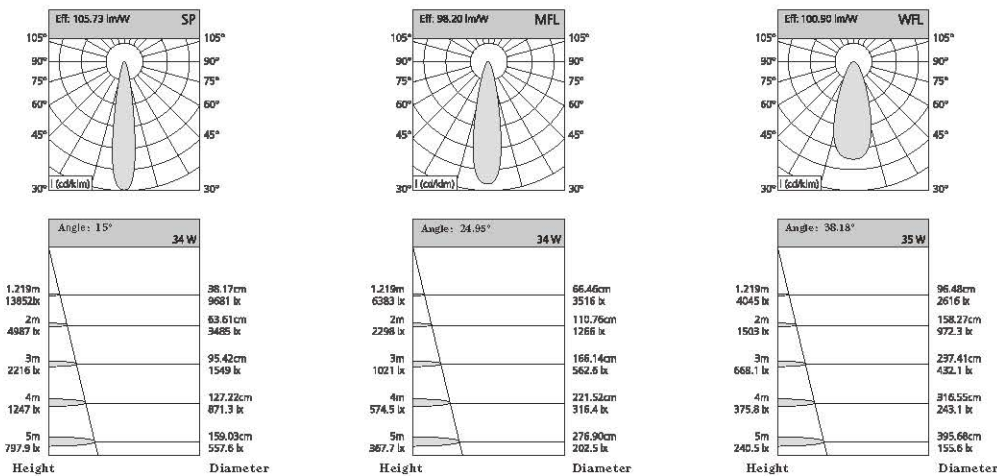


COB WALL WASHER SERIES

WSR(Frameless)COB Wall Washer Series

The lamp body is made of new aluminum alloy material with better heat dissipation, and the surface ring adopts anodizing surface treatment process; the surface ring is diversified, supporting various types of surface ring parts, meeting different lighting needs in different places; Improve the three-dimensional optical simulation analysis and anti glare design of the mirror; Independent isolated power supply, safe and stable;




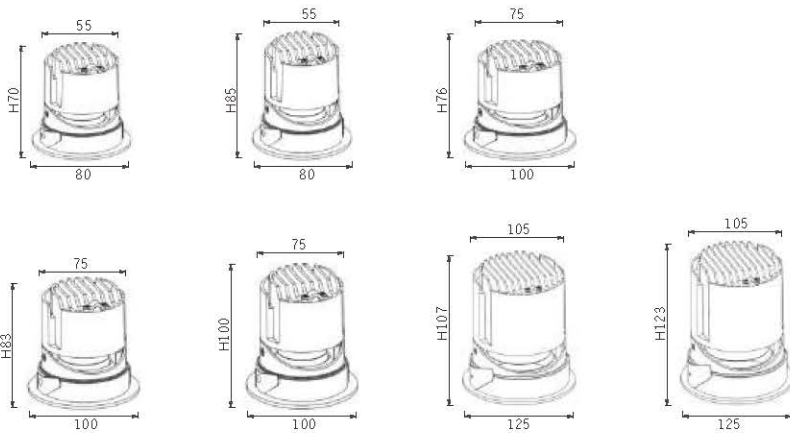

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	H70mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	H85mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	H76mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	H83mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	H100mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	H107mm	105mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	H123mm	105mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips


Optional color for Cover

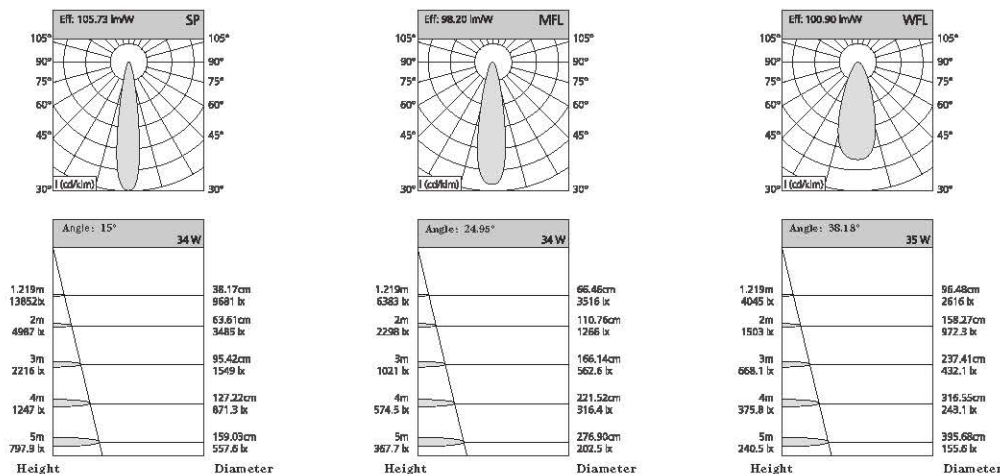


COB GRILLE LAMP SERIES

WSR- Single COB Grille Lamp Series

Good concentration, high light transmittance,
accurate light output angle and round spot
Bright and focused light sense, restore elegant life,
highlight foot tiles, and glow softly

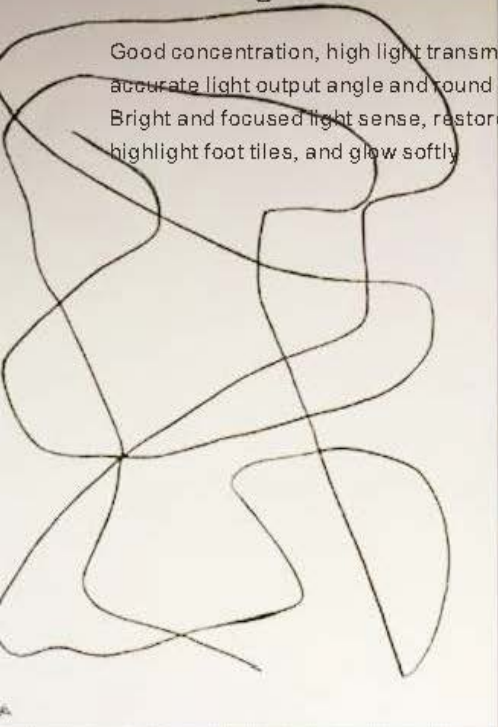

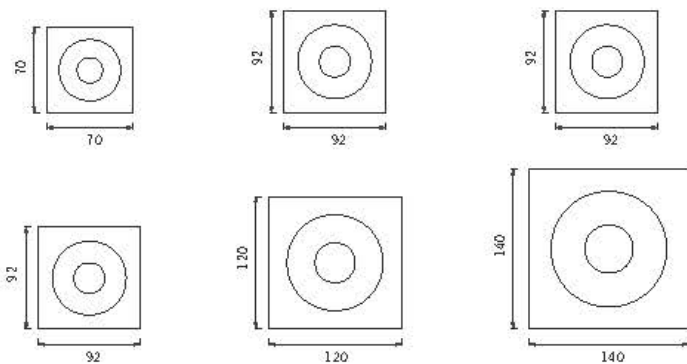


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	L70*W70*H65mm	L60*W60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	L92*W92*H71mm	L75*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	L92*W92*H77mm	L75*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	L92*W92*H93mm	L75*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L120*W120*H99mm	L100*W100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	L140*W140*H123mm	L120*W120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

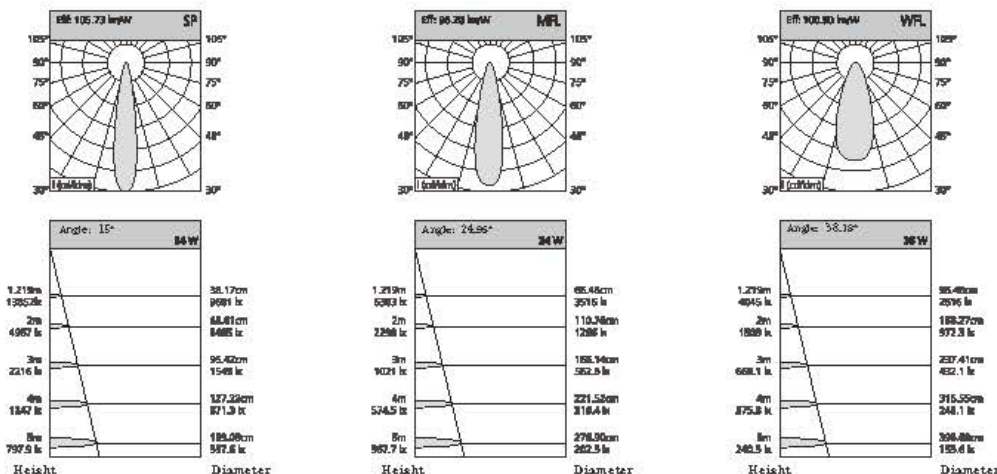

WSR-Double COB GRILLE LAMP SERIES




COB GRILLE LAMP SERIES

WSR-Double COB GRILLE LAMP SERIES

Air convection cooling system is safe and durable

Cup aluminum heat dissipation, large heat dissipation surface, air convection gap is designed at the bottom to fully diffuse heat energy






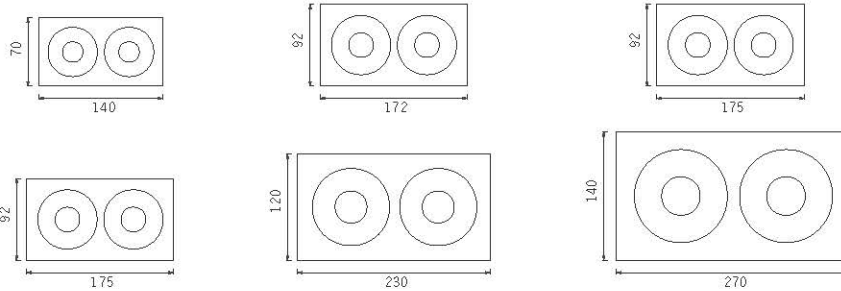


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	L140*W70*H65mm	L125*W60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	L172*W92*H71mm	L155*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	L175*W92*H77mm	L155*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	L175*W92*H93mm	L155*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L230*W120*H99mm	L205*W100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	L270*W140*H123mm	L250*W120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

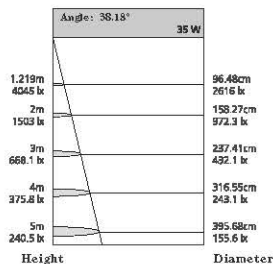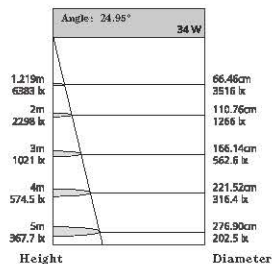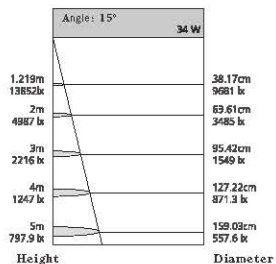


WSR-Triple COB Grille Lamp Series

COB GRILLE LAMP SERIES

WSR-Triple COB Grille Lamp Series

Good concentration, high light transmittance,
accurate light output angle and round spot.
Bright and focused light sense, restore elegant life,
high light foot tiles, and glow softly.








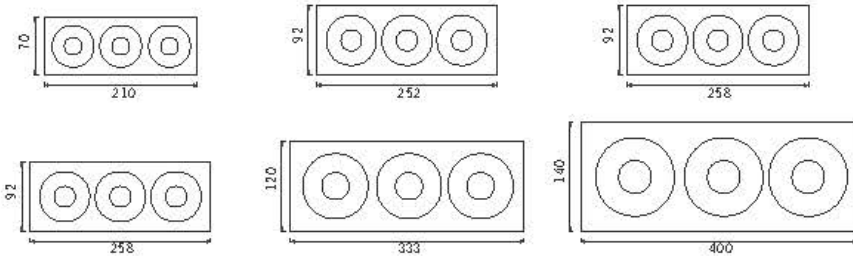


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	L210*W70*H65mm	L195*W60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	L252*W92*H71mm	L245*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	L258*W92*H77mm	L245*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	L258*W92*H93mm	L245*W75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L333*W120*H99mm	L310*W100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	L400*W140*H123mm	L380*W120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

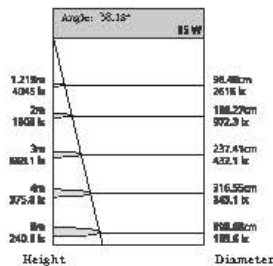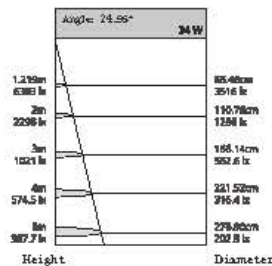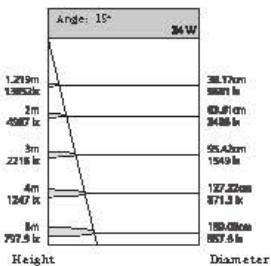

WSR-4Head COB Grille Lamp Series


COB GRILLE LAMP SERIES

WSR-4Head COB Grille Lamp Series

Air convection cooling system is safe and durable

Cup aluminum heat dissipation, large heat dissipation surface, air convection gap is designed at the bottom to fully diffuse heat energy








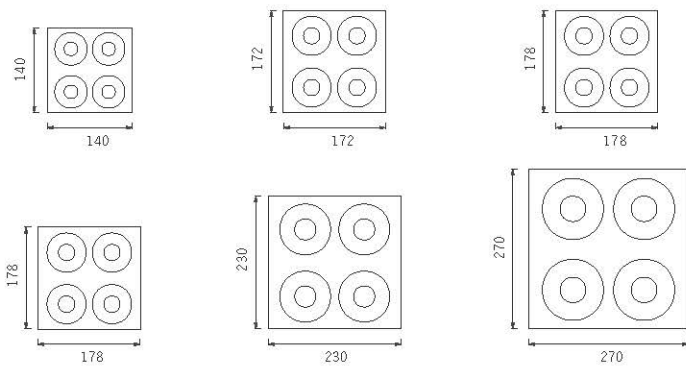


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	L140*W140*H65mm	L130*W130mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	L172*W178*H71mm	L160*W160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	L178*W178*H77mm	L160*W160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	L178*W178*H93mm	L160*W160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	L230*W230*H99mm	L210*W210mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
30-35W	L270*W270*H123mm	L250*W250mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

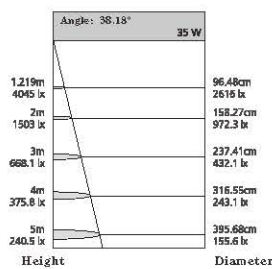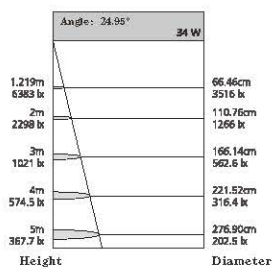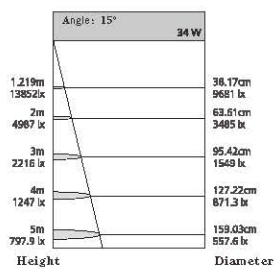

WSR(Surface mounted)COB surface mounted downlight series

COB SURFACE MOUNTED DOWNLIGHT SERIES


WSR(Surface mounted)COB surface mounted downlight series

High color rendering, restore true colors

High color rendering, low light decay, long life

Effectively prevent glare and create a comfortable
light environment




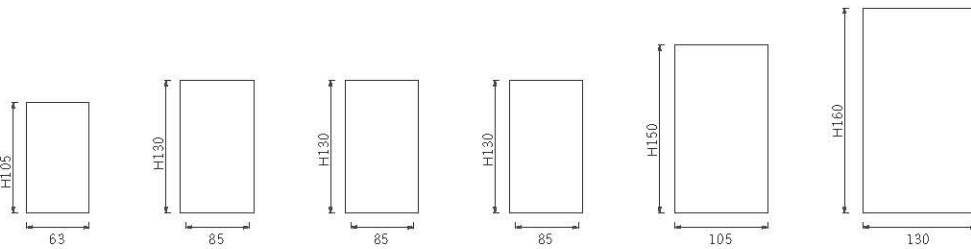

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Chip Brand	Driver Brand
WSP-SM-COB5W	5-7W	63*H105mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
WSP-SM-COB7W	7-8W	85*H130mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
WSP-SM-COB10W	10-12W	85*H130mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
WSP-SM-COB18W	18-20W	85*H130mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
WSP-SM-COB20W	20-25W	105*H150mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
WSP-SM-COB30W	30-35W	130*H160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

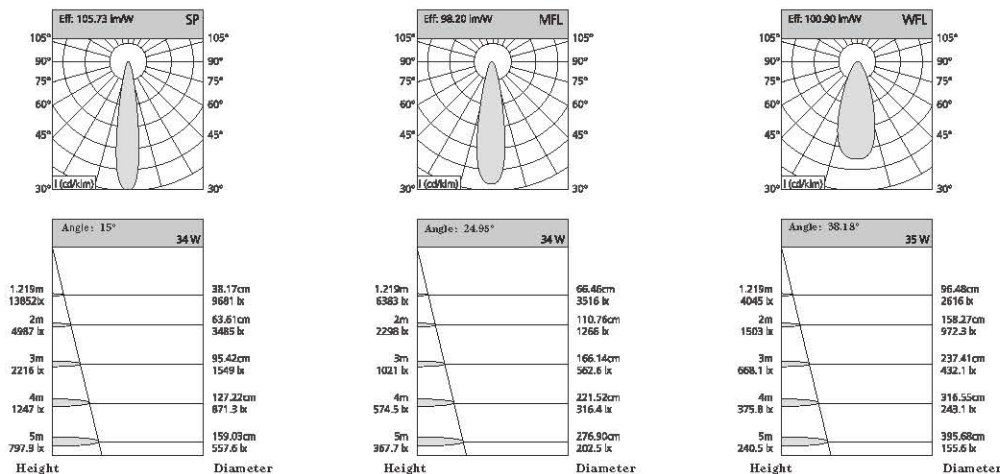

SPE-COB spotlight series



COB SPOTLIGHT SERIES



SPE-COB spotlight series

Air convection cooling system is safe and durable

Cup aluminum heat dissipation, large heat dissipation surface,

air convection gap is designed at the bottom to fully diffuse heat energy

A variety of specifications to meet individual needs

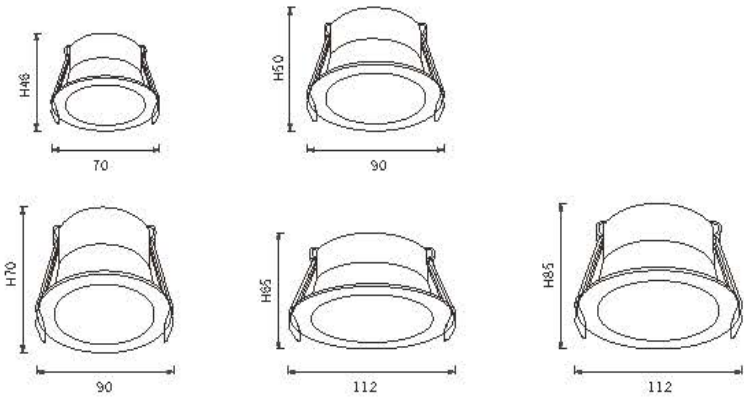


CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Power	Dimension	Chip Brand	Driver Brand
5-7W	70 *H46 mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-8W	90 *H50 mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	90 *H70 mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
12-15W	112 *H65 mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-25W	112 *H85 mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover



Black

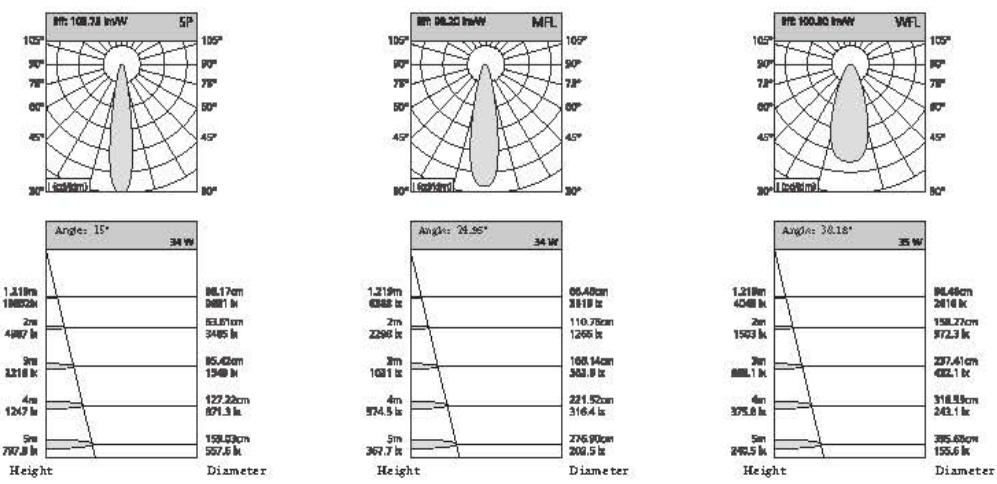

SPP-COB spotlight series



COB SPOTLIGHT SERIES

SPP-COB spotlight series




□ 15°



□ 24°



□ 38°

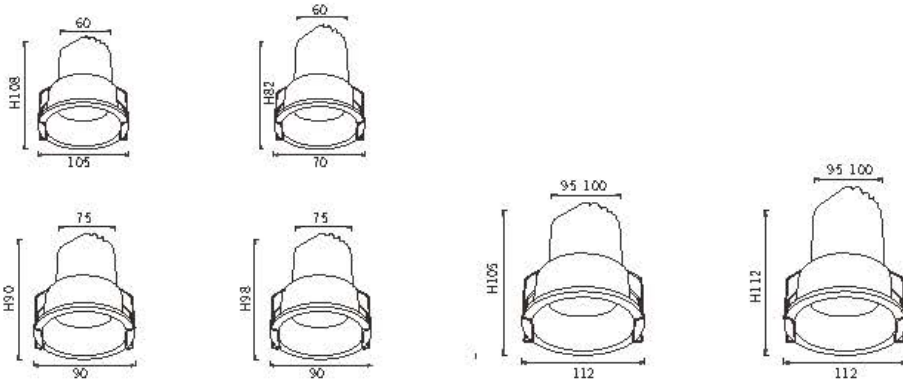


Model	Power	Dimension	Outout	Chip Brand	Driver Brand
SPP-COB6W	5-7W	70*H78mm	60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
SPP-COB7W-1	7-10W	70*H82mm	60mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
SPP-COB7W-2	7-10W	90*H90mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
SPP-COB10W	10-12W	90*H98mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
SPP-COB15W	15-18W	112*H105mm	95-100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
SPP-COB18W	18-20W	112*H112mm	95-100mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips



CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Optional color for Cover

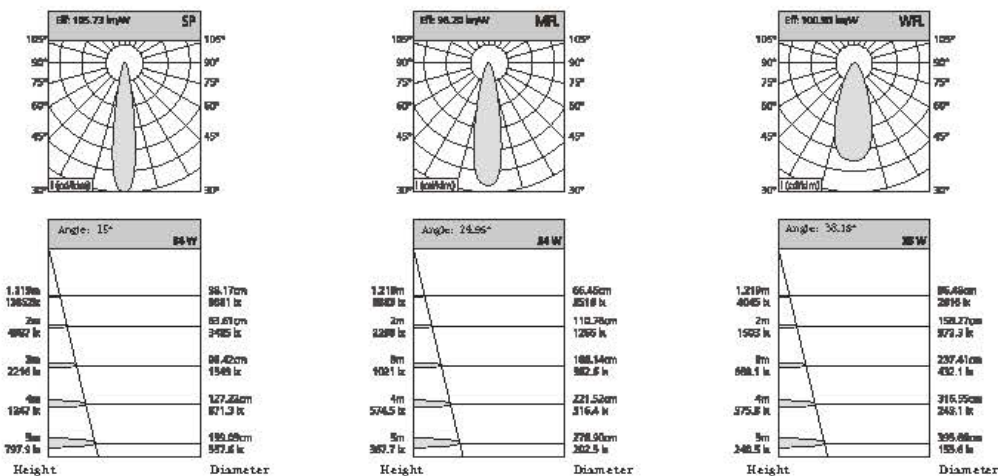


SPI-COB spotlight series

COB SPOTLIGHT SERIES

SPI-COB spotlight series



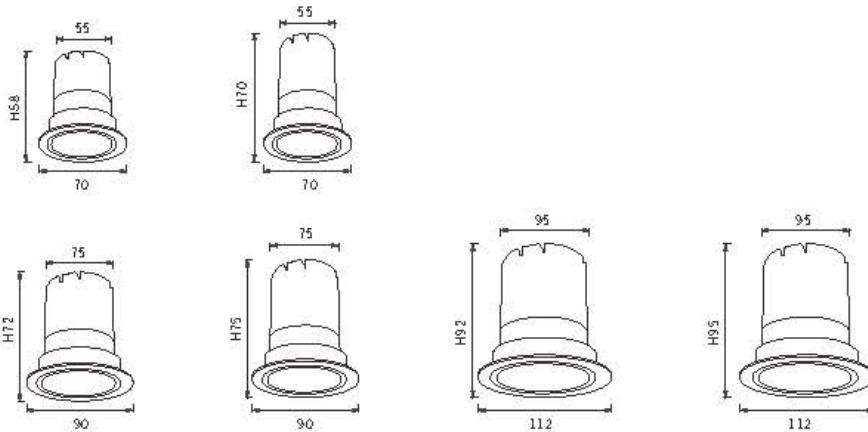


Model	Power	Dimension	Outout	Chip Brand	Driver Brand
SPI-COB5W	5-7W	70*H58mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPI-COB7W	7-10W	70*H70mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPI-COB10W-1	10-12W	90*H72mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPI-COB10W-2	10-12W	90*H75mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPI-COB18W	18-20W	112*H92mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
SPI-COB20W	20-25W	112*H95mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips



CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional color for Cover

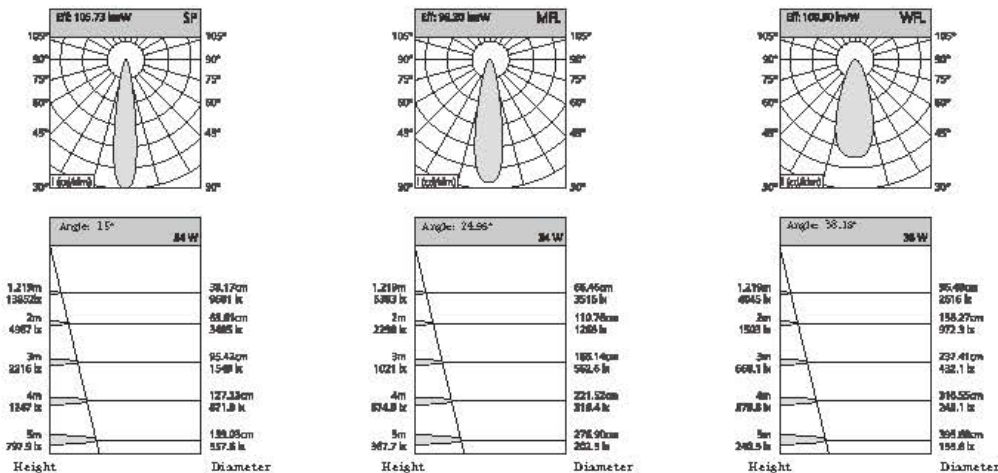

SPS-COB spotlight series

COB SPOTLIGHT SERIES



SPS-COB spotlight series

Circular heat dissipation anti-oxidation

Whirlpool heat sink, good thermal conductivity, high temperature

High strength, good heat resistance, reliable and stable performance



Energy Saving

Than traditional Energy-saving
downlights save up to 70% of energy



Long Lasting

Life span of up to 50,000 hours



Comfortable

Low glare
Up to UGR21




Flexible

Detachable front ring and reflector to meet
More flexible customization requirements



Intelligent

DALI dimming system


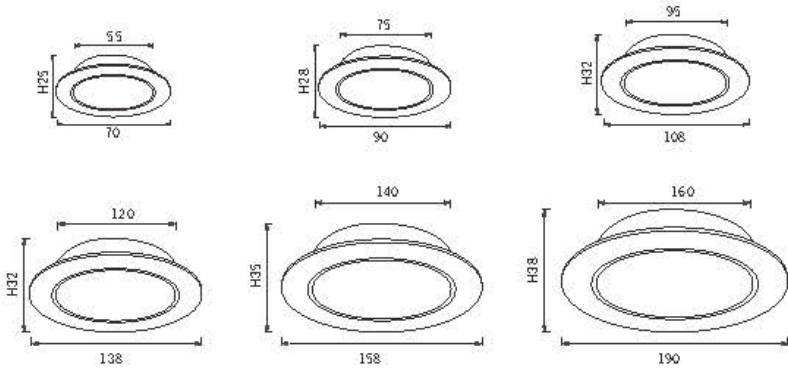


CCT 2700,3000,3500,4000,5700
 Beam Angle 24°
 Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
3W	70*H25mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
5-7W	90*H28mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
7-10W	108*H32mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
12-20W	138*H32mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20-25W	158*H36mm	140mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
30-40W	190*H38mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips

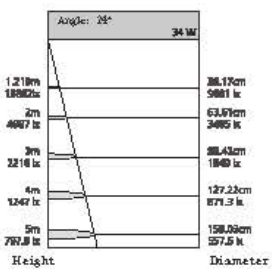




COB SPOTLIGHT SERIES

SPD-COB spotlight series

Metal buckle design, strong elastic force,
simpler installation and safer use
Control different scenes, flexibly
compatible with various spaces




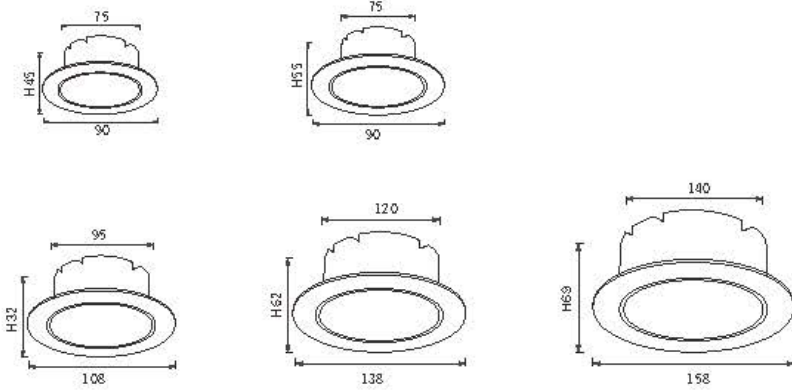

CCT 2700,3000,3500,4000,5700
 Beam Angle 10° 23° 36°
 Input Voltage 220-240V ~50/60Hz

Power	Dimension	Outout	Chip Brand	Driver Brand
5-7W	90*H45mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7-10W	90*H55mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-15W	108*H48mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15-20W	138*H62mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
25-30W	158*H69mm	140mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional color for Cover

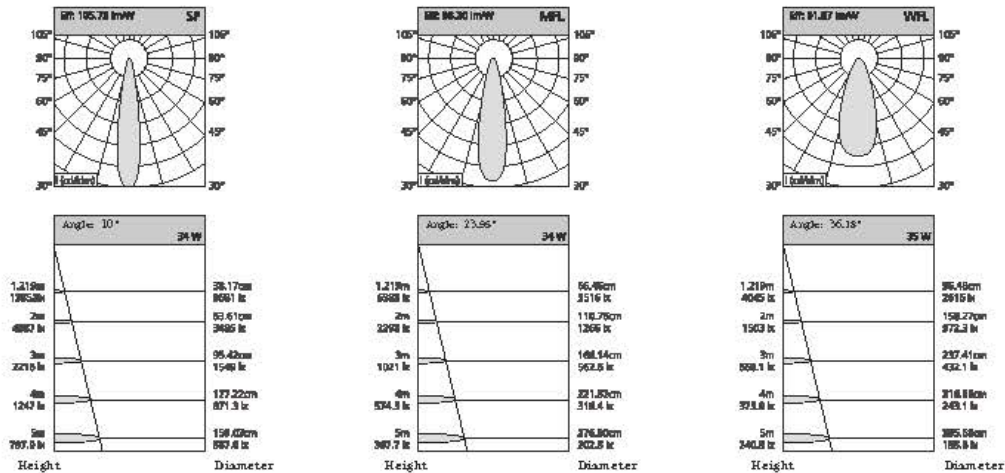

SPF-COB spotlight series

COB SPOTLIGHT SERIES


SPF-COB spotlight series

High color rendering, restore true colors

High color rendering, low light decay, long life

Effectively prevent glare and create a comfortable light environment










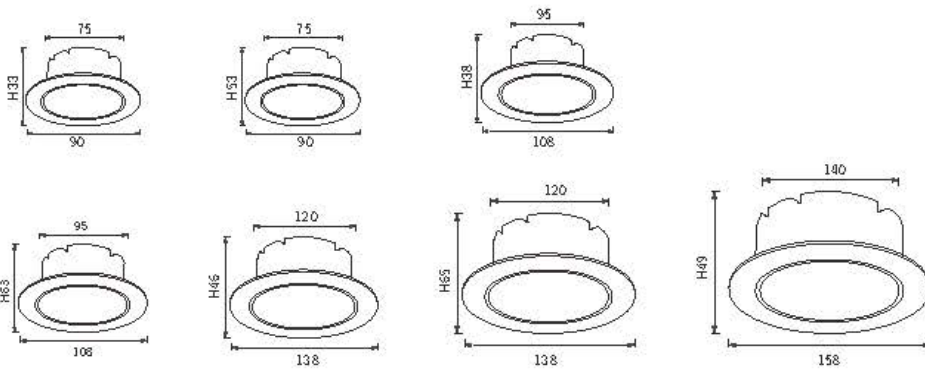


CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 36° 60°
 Input Voltage 220-240V ~50/60Hz

Optional color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
5-7W	90*H33mm	75mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
10-12W	90*H53mm	75mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
10-15W	108*H38mm	95mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
20-25W	108*H63mm	95mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
20-25W	138*H46mm	120mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
30-35W	138*H65mm	120mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips
30-35W	158*H49mm	140mm	Bridgelux/Cree/Osram	Eaglexise/Kegu/Philips

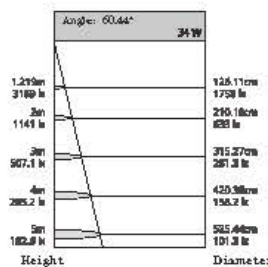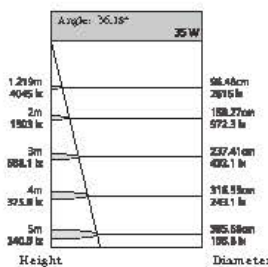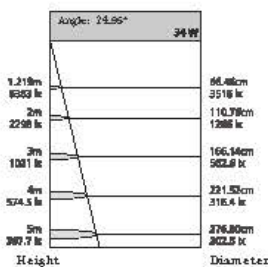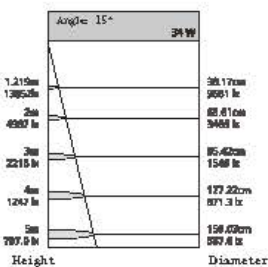


SPG-COB spotlight series

COB SPOTLIGHT SERIES

SPG-COB spotlight series

Great heat dissipation due to unique structural design.
Control different scenes, flexibly compatible with various spaces.



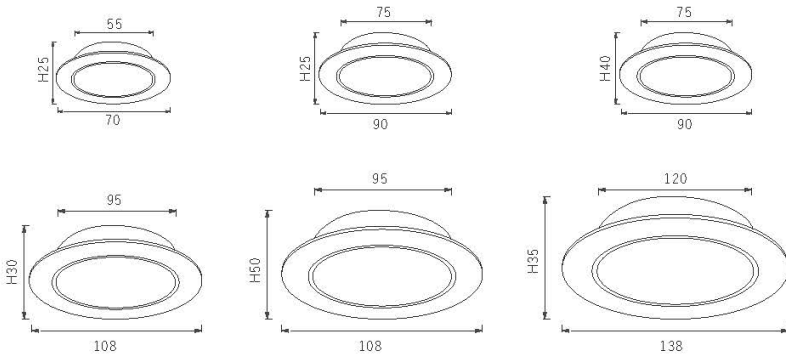









Power	Dimension	Cutout	Chip Brand	Driver Brand
3-5W	70*25mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
5-7W	90*25mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
10-12W	90*40mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
7-10W	108*30mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20-25W	108*50mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
15-20W	138*35mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips



CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 36° 60°
 Input Voltage 220-240V ~50/60Hz
 Optional color for Cover



Write

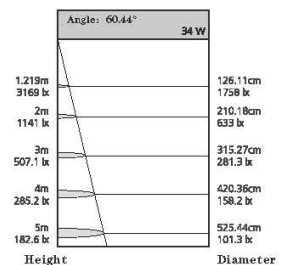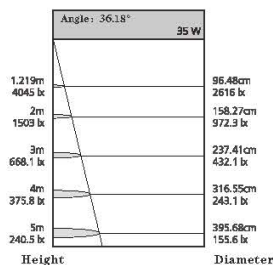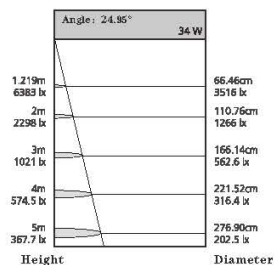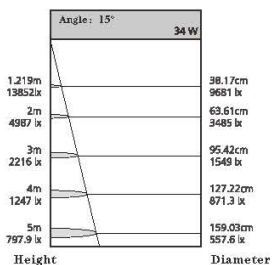

WSTR-COB (Frameless) Module Wall Washer Series-Round

COB MODULE WALL WASHER SERIES


WSTR-COB (Frameless) MODULE WALL WASHER SERIES-ROUND

Air convection cooling system is safe and durable

Cup aluminum heat dissipation, large heat dissipation surface, air convection gap is designed at the bottom to fully diffuse heat energy

High transmittance, clear and bright light, good overall reflectance and comfortable light









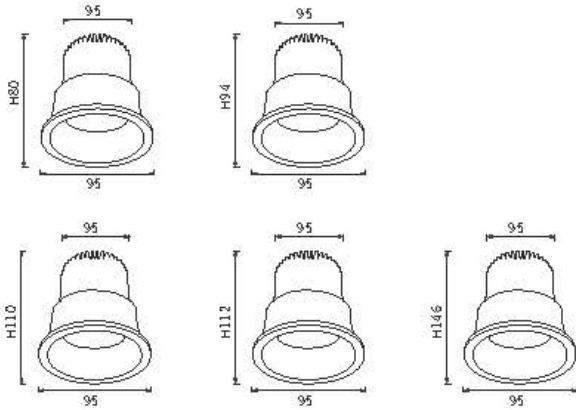

CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Power	Dimension	Outout	Chip Brand	Driver Brand
5W	95*H80mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7W	95*H94mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10W	95*H110mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15W	95*H112mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20W	95*H146mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional Color for Cover

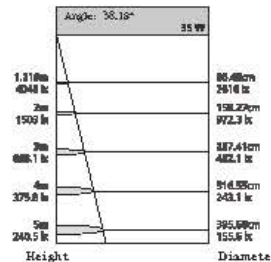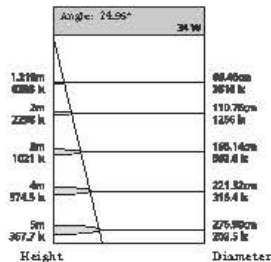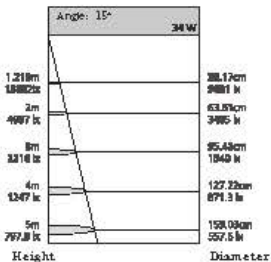

COB MODULE WALL WASHER SERIES



WSTR-COB (Frameless) MODULE WALL WASHER SERIES-SQUARE




Optional heatsink



Air convection cooling system is safe and durable
Cup aluminum heat dissipation, large heat dissipation surface,
air convection gap is designed at the bottom to fully
diffuse heat energy

Suitable for a variety of places


Easily solve decoration troubles, clothing stores,
large stores, home decoration and other places



CCT 2700,3000,3500, 4000,5700
Beam Angle 15° 25° 38° 60°
 (Shinland Reflector $\phi 44$)
 10° 23° 36°
 (GLK len ($\phi 43$))
Input Voltage 220-240V ~50/60Hz


Power	Dimension	Cutout	Chip Brand	Driver Brand
5W	L75*W75*H85 mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
7W	L75*W75*H99mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10W	L75*W75*H105mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15W	L75*W75*H117mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20W	L75*W75*H151 mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional Color for Cover

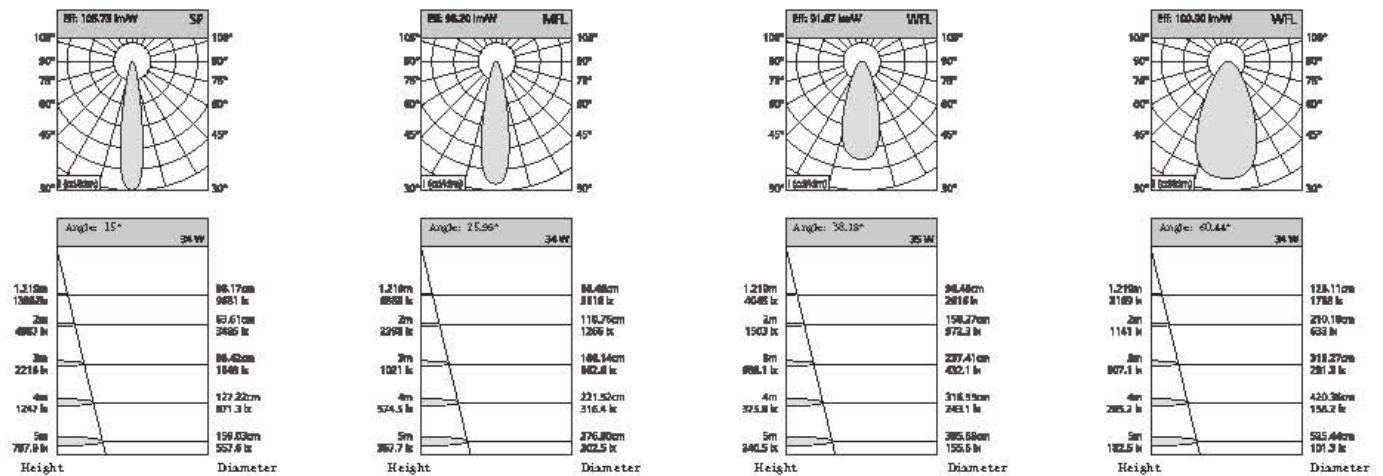

**COB WALL
WASHER
SERIES**

WSY-COB WALL WASHER SERIES






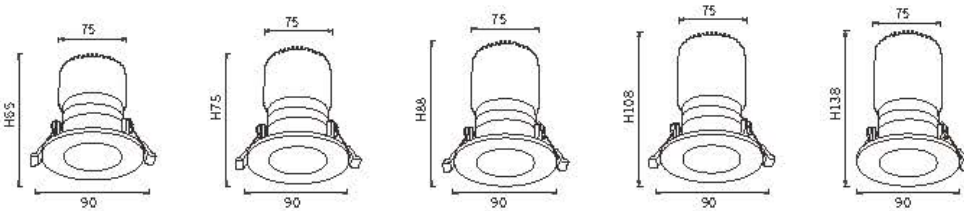


Power	Dimension	Cutout	Chip Brand	Driver Brand
5W	90*65mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
7W	90*75mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
10W	90*88mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
15W	90*108mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips
20W	90*138mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/ Philips



CCT 2700,3000,3500,4000,5700
 Beam Angle 15° 24° 38°
 Input Voltage 220-240V ~50/60Hz

Optional Color for Cover

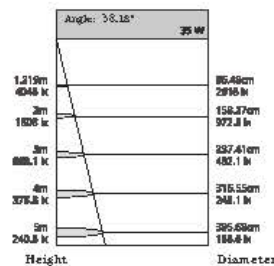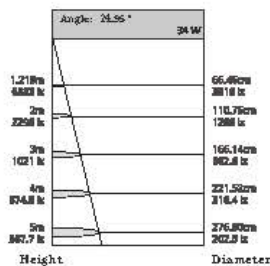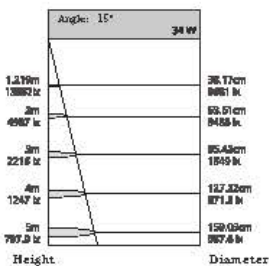




COB Wall Washer Series

Air convection cooling system is safe and durable Cup aluminum heat dissipation,
large heat dissipation surface, air convection gap is designed at the bottom to fully
diffuse heat energy Suitable for a variety of places

Easily solve decoration troubles, clothing stores, large stores, home decoration and other places



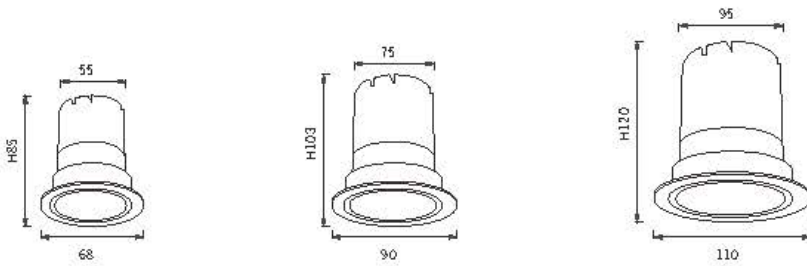

CCT 2700,3000,3500,4000,5700







Beam Angle 15° 24° 38°

Input Voltage 220-240V ~50/60Hz

Optional Color for Cover



Power	Dimension	Cutout	Chip Brand	Driver Brand
7-10W	68*H85mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	90*H103mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	110*H120mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

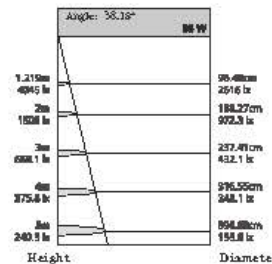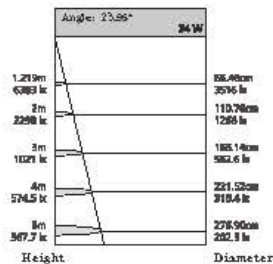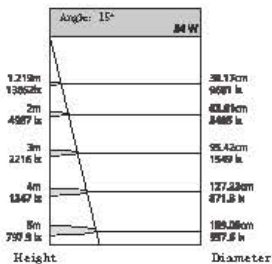


WSI-COB Wall Washer Series



COB WALL WASHER SERIES

WSI-COB WALL WASHER SERIES






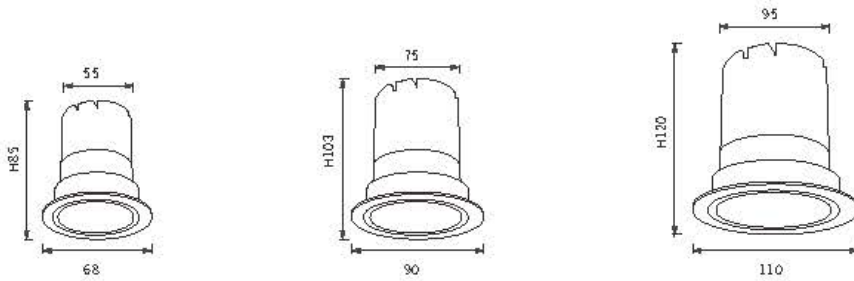


CCT 2700,3000,3500,4000,5700
Beam Angle 15° 24° 38°
Input Voltage 220-240V ~50/60Hz

Optional Color for Cover



Power	Dimension	Outcut	Chip Brand	Driver Brand
7-10W	68*H85mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	90*H103mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
20-25W	110*H120mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

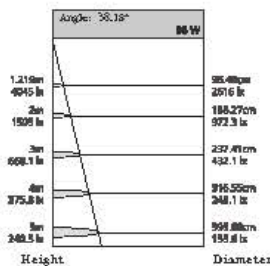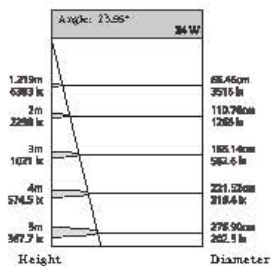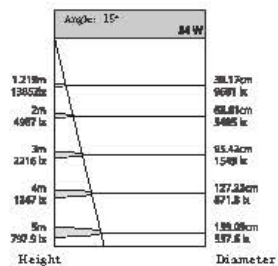



DBF-SMD Downlight Series

DOWNLIGHT SERIES

DBF-SMD DOWNLIGHT SERIES

Easily solve decoration troubles,
clothing stores, large stores,
home decoration and other places



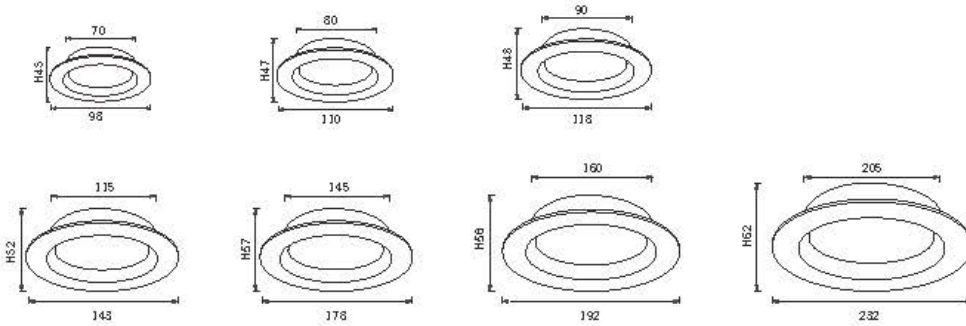


CCT 2700,3000,3500,4000,5700
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Outout	Chip Brand	Driver Brand
2.5 Inch	3-5W	98*H45mm	70mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips
3Inch	5-7W	110*H47mm	80mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips
3.5Inch	7-9W	118*H48mm	90mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips
4Inch	9-12W	143*H52mm	115mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips
5Inch	15-18W	178*H57mm	145mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips
6Inch	18-24W	192*H58mm	160mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips
8Inch	24-40W	232*H62mm	205mm	BridgeLux/Cree/Osram	EagleEye/Kegu/Philips

Optional Color for Cover




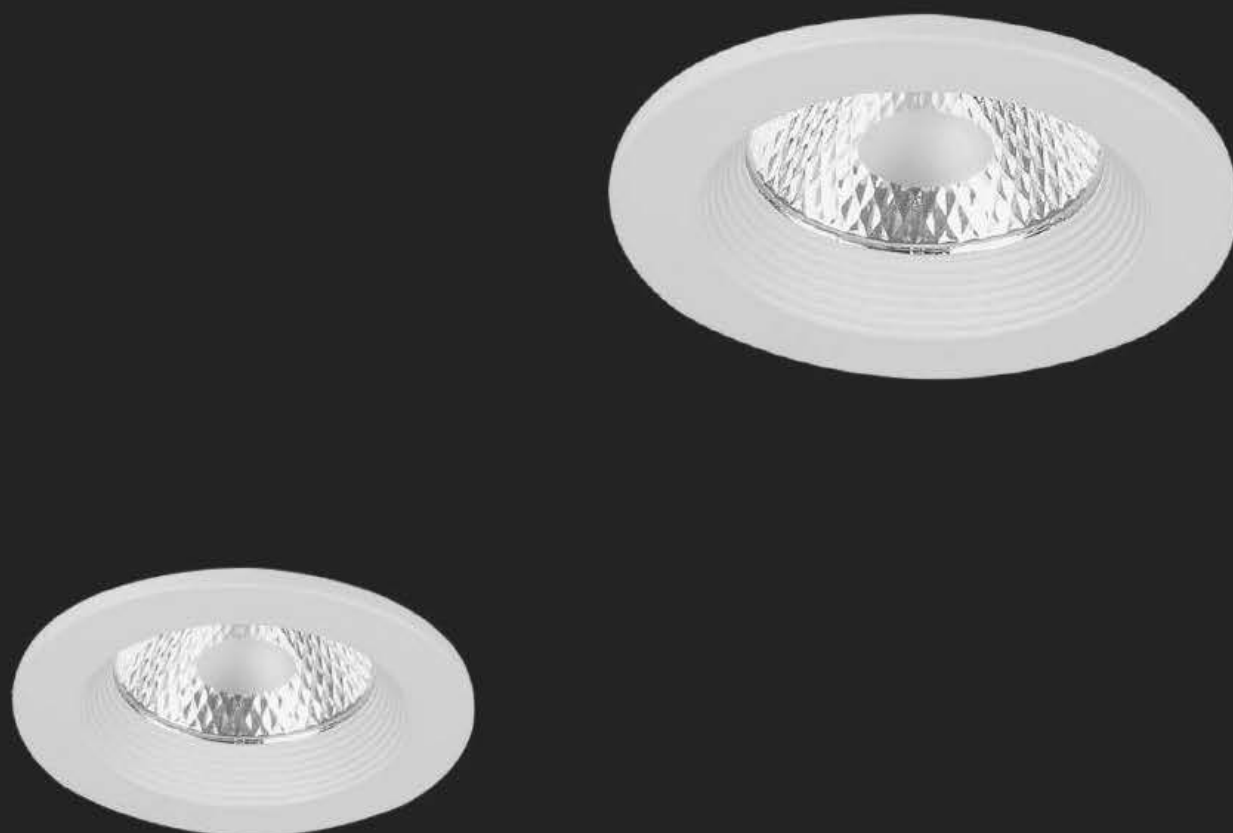

COB Downlight

DBF-COB DOWNLIGHT SERIES









Metal buckle design, strong elastic force, easier installation and safer use
A variety of specifications to meet individual needs

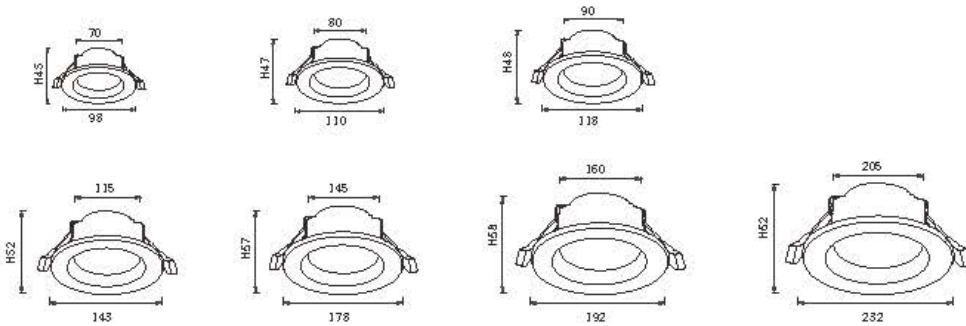

CCT 2700,3000,3500,4000,5700
Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Outout	Chip Brand	Driver Brand
2.5Inch	3-5W	98*H45mm	70mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
3Inch	5-7W	110*H47mm	80mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
3.5Inch	7-9W	118*H48mm	90mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
4Inch	9-12W	143*H52mm	115mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
5Inch	15-18W	178*H57mm	145mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
6Inch	18-24W	192*H58mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
8Inch	24-30W	232*H62mm	205mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional Color for Cover

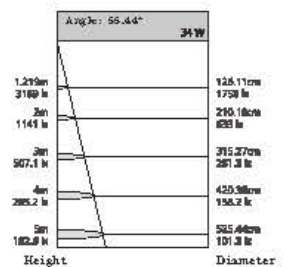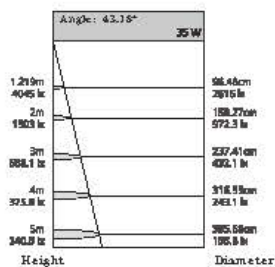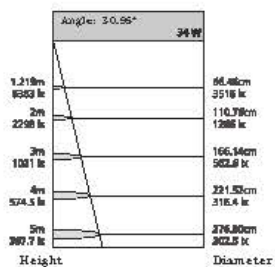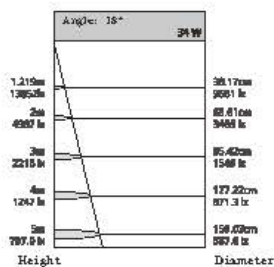



COB SPOTLIGHT SERIES


DBT-COB SPOTLIGHT SERIES

Circular heat dissipation anti-oxidation

Vortex type heat sink, good thermal conductivity, high temperature strength, good heat resistance, reliable and stable performance

Moisture-proof sealing ring, waterproof plug, corrosion-resistant, waterproof, moisture-proof

The light source is deeply hidden, the deep cup design, no glare, accurate focusing, comfortable lighting








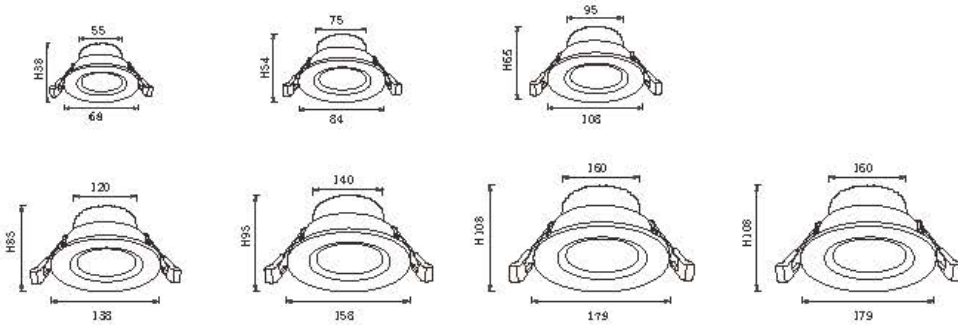


Power	Dimension	Cutout	Chip Brand	Driver Brand
1-3W	68*H38mm	55mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
5-7W	84*H54mm/ 90*H54mm	75mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10-12W	108*H65mm	95mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
18-20W	138*H85mm	120mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
25-30W	158*H95mm	140mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
35-40W	179*H108mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
50-60W	179*H108mm	160mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips



CCT 2700,3000,3500, 4000,5700
Input Voltage 220-240V ~50/60Hz

Optional Color for Cover

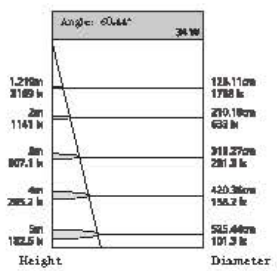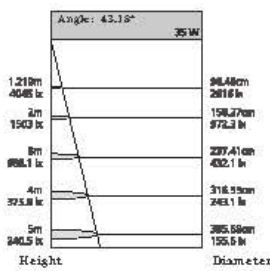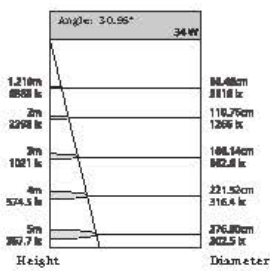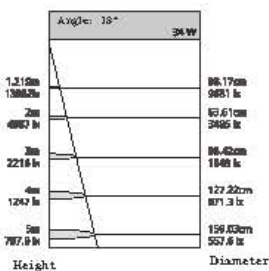


LNS Grille Linear Lamp Series

GRILLE LINEAR LAMP SERIES

LNS GRILLE LINEAR LAMP SERIES

A variety of styles are available, providing a variety of possibilities for mixing and matching. Due to its unobtrusive and simple design, this lamp is very suitable for living room, corridor, bedroom or any need. Emphasize the lighting.

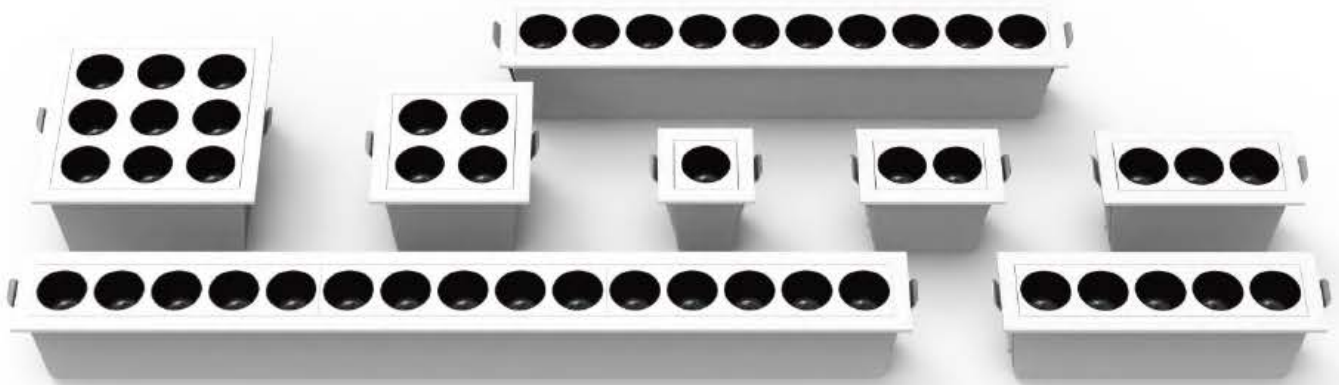









CCT 2700,3000,3500,4000,5700

Beam Angle 15° 24° 38° 60°

Input Voltage 220-240V ~50/60Hz

Model	Power	Dimension	Outout	Chip Brand	Driver Brand
1Head	1-3W	L46*W46*H52mm	L38*W38mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
2Head	2-6W	L69*W46*H52mm	L60*W35mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
3Head	3-9W	L96*W46*H52mm	L88*W35mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
4Head(SQ)	4-12W	L76*W76*H52mm	L68*W68mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
5Head	5-15W	L148*W46*H52mm	L140*W35mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
9Head(SQ)	9-27W	L106*W106*H52mm	L98*W98mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
10Head	10-30W	L285*W46*H52mm	L276*W35mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips
15Head	15-45W	L417*W46*H52mm	L408*W35mm	Bridgelux/Cree/Osram	Eaglerise/Kegu/Philips

Optional Color for Cover

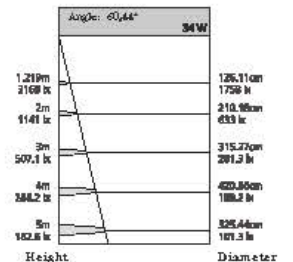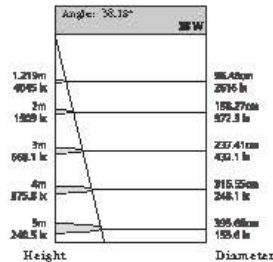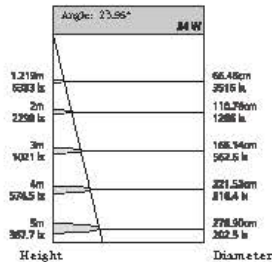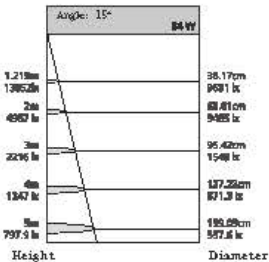



☎ Phone : +370-600-93111

✉ E-mail : info@ledesta.eu