

LEDestón

premium lighting

Catalogue Nr.9

Quality Within Your Reach

www.ledesta.eu

01 LED Underground Light

p1>p18

02 LED Garden Spike Light

p19>p21

03 LED Underwater Light

p22>p26

04 Outdoor LED Step Light

p27>p31

0
1
~
0
4

0
5
~
0
7

05 Outdoor LED Wall Light

p32>p53

06 LED Lawn Light

p54>p56

LED Bollard Light


p57

07 LED Indoor Step Light

P58>p62

01

LED Underground Light

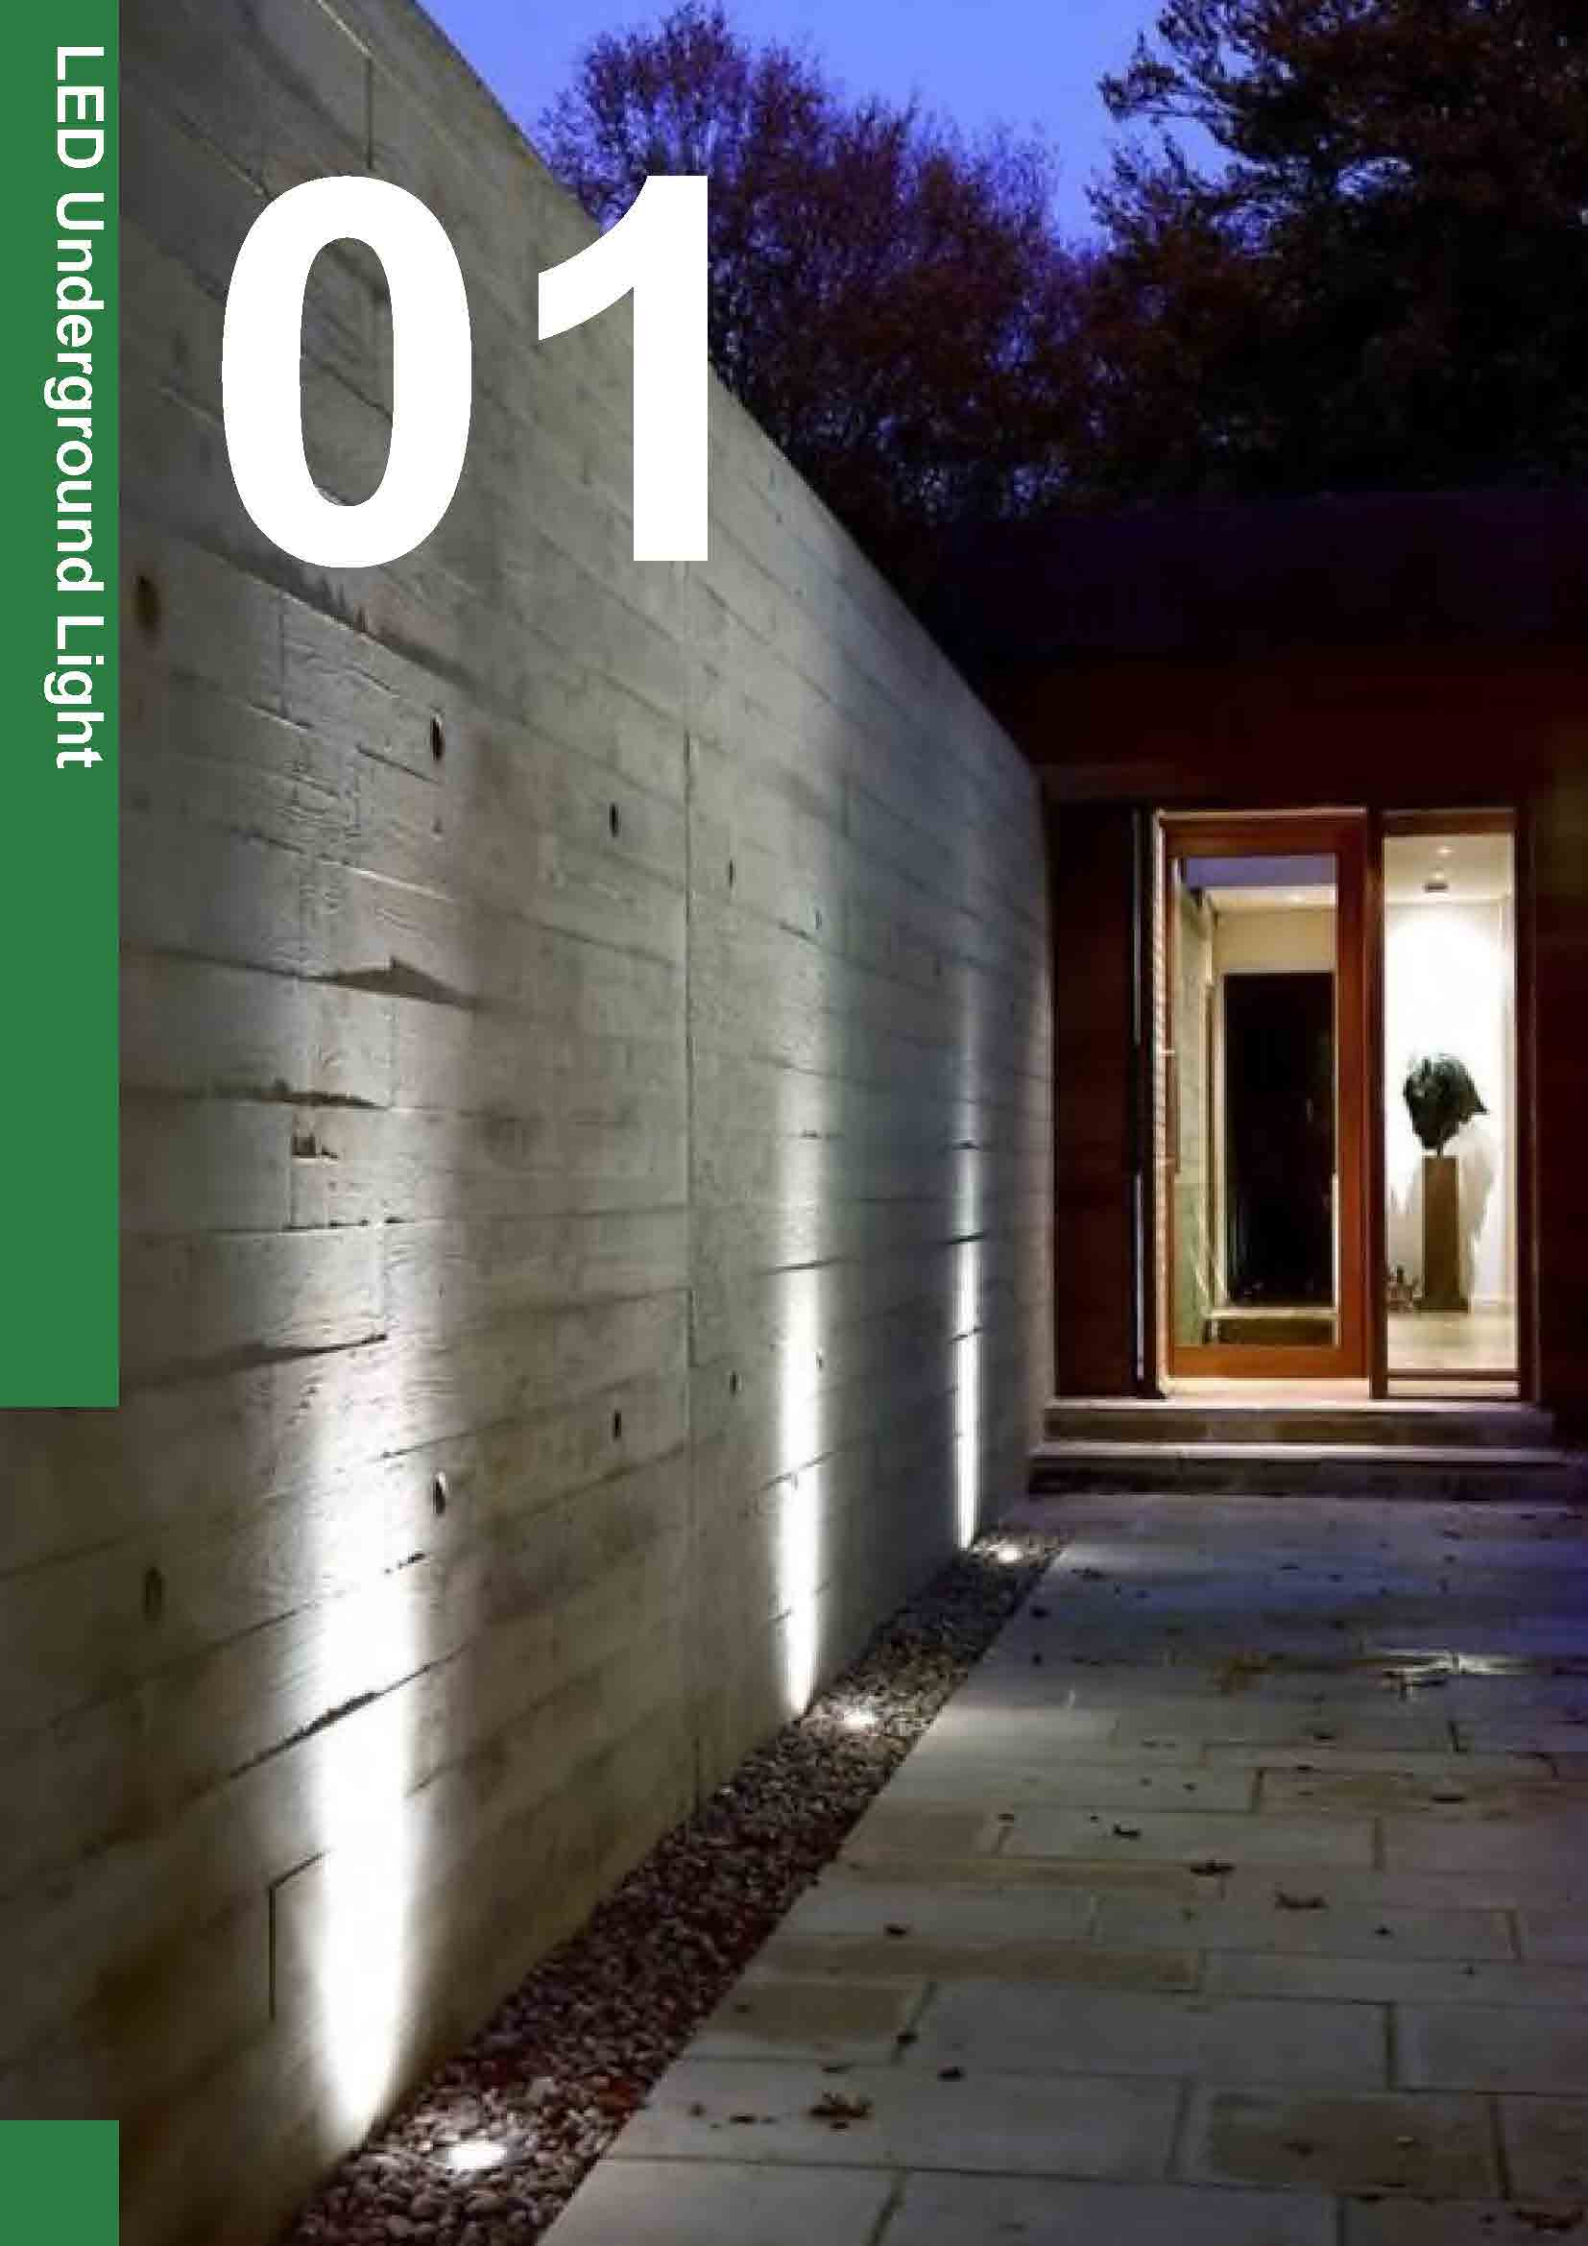

● 6000K ● 5000K ● 4000K ● 3000K ● 2700K





3W COB underground light


Parameter	
General Data	
Name : LED 3W Stainless Steel Underground Light/Floor Light	
Item No.	SUS04
Power	3W
LED type	CREE/Brigelux/Osram
Luminous flux	80lm/W
CCT	2700K , 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	40°
Dimension	∅92mm
Cut out	∅82x90mm
Warranty	5 Years
Certifications	CE , RoHS
Electrical Data	
Input voltage	90-265V AC or DC12, DC24V
Insulation class	Class I, Class III
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square, 1PC rubber cable 1M H05RN-F 2x1.0mm square,
Driver	Eaglerise
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	SUS304.016
Protection finishing	SUS
Trim	SUS304.016
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Black



Dimension

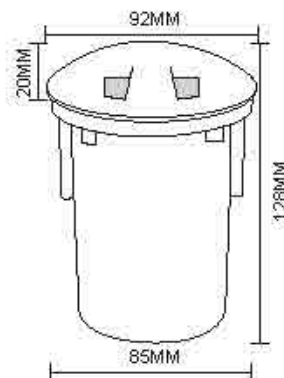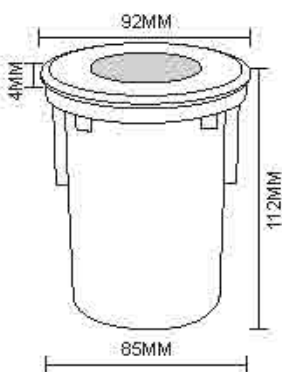

6000K 5000K 4000K 3000K 2700K

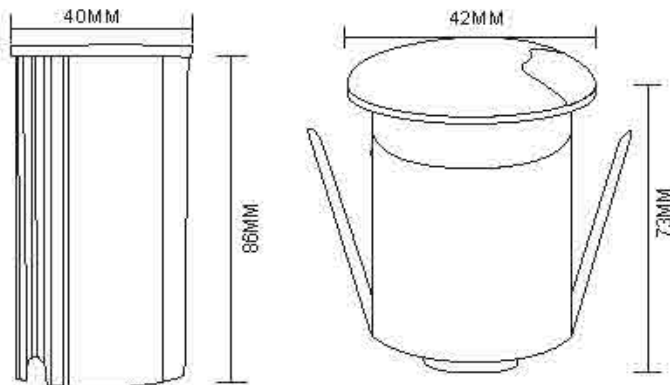

Parameter				
General Data				
Name : LED 1W Stainless Steel Underground Light/Floor Light				
Item No.	SUS01,SUS02,SUS03			
Power	1W			
LED type	CREE/Brigelix/Osram			
Luminous flux	80lm/W			
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B			
CRI	80+			
Beam angle	10°,15°, 30°, 45°, 60°, 90°, 120°			
Dimension	Please see table below			
Cut out	Please see table below			
Warranty	5 Years			
Certifications	CE, RoHS			
Power Model	Chip Brand	Dimension	Material	Driver brand
1W SUS01W	CREE/Brigelix/Osram	Ø42x H73mm	SUS316 or SUS304	Eaglerise
1W SUS02W	CREE/Brigelix/Osram	Ø52 H80mm	SUS316 or SUS304	Eaglerise
1W SUS03W	CREE/Brigelix/Osram	Ø62x H85mm	SUS316 or SUS304	Eaglerise
Electrical Data				
Input voltage	90-265V AC or DC12, DC24V			
Insulation class	Class I, Class III			
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square, 1PC rubber cable 1M H05RN-F 2x1.0mm square,			
Driver	Eaglerise			
Construction Data				
IP rating	IP67 Waterproof			
IK rating	IK08			
Housing	SUS304/316			
Protection finishing	SUS			
Trim	SUS304/316			
Glass	Step tempered Glass, T=8mm.			
Loading capacity	500 kgs			
Cable Gland	PG7 IP67			
Gasket	O-ring PMQ silicone seal			
Accessories				
Mounting Sleeve	Anti-corrosion PVC. Black			
Clip	With SUS304 spring that's for deck lights or ceiling lights application			





SUS316



Tempered Glass T:8mm




Parameter	
General Data	
Name:	1W LED Underground Light/ Deck Light/Step Light
Item No.	DMS1W
Power	1W
LED type	CREE XBD
Luminous flux	80lm
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	16°, 25°, 40°, 60°
Dimension	Ø42x53 (mm) Diameter x length
Cut out	With Mounting Sleeve: Ø80x95 (mm) Diameter x length Without Mounting Sleeve :Ø33mm
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12-24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x0.5mm square
Driver	Done
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing.
Trim	SUS316
Glass	Step tempered Glass: T=8mm
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC, Black
Clip	With SUS304 spring that's for deck lights or ceiling lights application

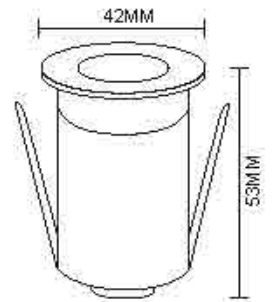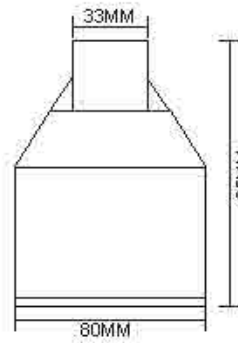

Luminous Intensity Distribution Curve



Illuminance at a Distance

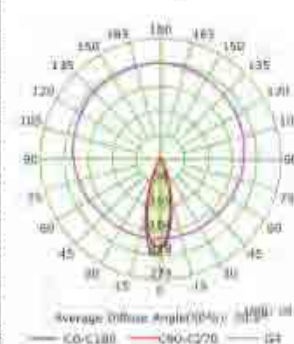



6000K 5000K 4000K 3000K 2700K



Parameter	
General Data	
Name:	3W LED Underground Light/ Deck Light/Step Light
Item No.:	DMM3W COB
Power:	3W
LED type:	CREE XBD, Bridgelux COB
Luminous flux:	80lm/W
CCT:	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI:	80+
Beam angle:	40°
Dimension:	Ø46x72 (mm) Diameter x length
Cut out:	With Mounting Sleeve: Ø80x95 (mm) Diameter x Length
Warranty:	5 Years
Certifications:	CE, RoHS
Electrical Data	
Input voltage:	DC 12-24V
Insulation class:	Class III
Cable:	1PC rubber cable 1M H05RN-F 2x0.5mm square
Driver:	Done
Construction Data	
IP rating:	IP67 Waterproof
IK rating:	IK08
Housing:	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing:	20~25µm thickness anodized film for housing.
Trim:	SUS316
Glass:	Step tempered Glass. T=8mm
Loading capacity:	500 kgs
Cable Gland:	PG7 IP67
Gasket:	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve:	Anti-corrosion PVC. Black
Clip:	With SUS304 spring that's for deck lights or ceiling lights application

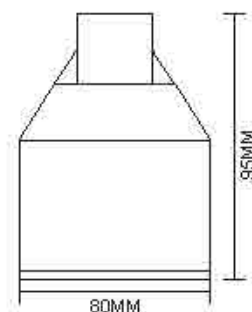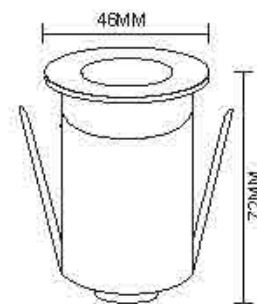


6000K 5000K 4000K 3000K 2700K

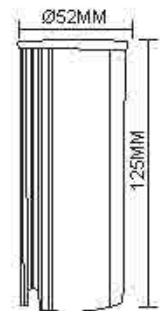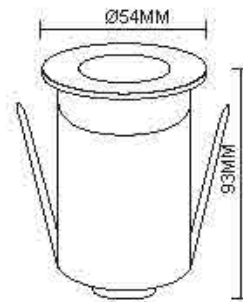

Parameter	
General Data	
Name	3W/5W LED COB Underground Light/ Deck Light/Step Light
Item No.	DML3W,DMLS5W
Power	3W/5W
LED type	CREE XBD
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	40°
Dimension	Ø54x93 (mm) Diameter x length
Cut out	With Mounting Sleeve: Ø52x125 (mm) Diameter x length
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12-24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x0.5mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing.
Trim	Aluminum 6063
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Black
Clip	With SUS304 spring that's for deck lights or ceiling lights application


6000K 5000K 4000K 3000K 2700K

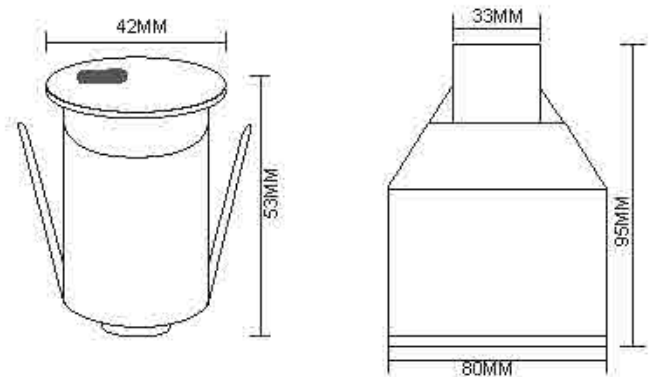


Parameter		
General Data	Cable	1PC rubber cable 1M H05RN-F 2x0.5mm square
Name: 1W LED Underground	Driver	/
Light/ Deck Light/Step Light	Construction Data	
Item No.	IP rating	IP67 Waterproof
Power	IK rating	IK08
LED type	Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Luminous flux	Protection finishing	20-25µm thickness anodized film for housing
CCT	Trim	Aluminum 6063
CRI	Glass	Step tempered Glass, T=8mm
Beam angle	Loading capacity	500 kgs
Dimension	Cable Gland	PG7 IP67
Cut out	Gasket	O-ring PMQ silicone seal
	Accessories	
Net weight	Mounting Sleeve	Anti-corrosion PVC, Black
Warranty	Clip	With SUS304 spring that's for deck lights or ceiling lights application
Certifications		
Electrical Data		
Input voltage		
Insulation class		



Parameter	
General Data	
Name:	3W LED Underground Light/ Deck Light/Step Light
Item No.:	DMC3W
Power:	3W
LED type:	CREE XBD, Bridgelux COB
Luminous flux:	80lm/W
CCT:	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI:	80+
Beam angle:	B1, B2, B3
Dimension:	Ø46x72 (mm) Diameter x length
Cut out:	With Mounting Sleeve: Ø80x95 (mm) Diameter x length
Warranty:	5 Years
Certifications:	CE, RoHS
Electrical Data	
Input voltage:	DC12-24V
Insulation class:	Class III
Cable:	1PC rubber cable 1M H05RN-F 2x0.75mm square
Driver:	/
Construction Data	
IP rating:	IP67 Waterproof
IK rating:	IK08
Housing:	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing:	20~25µm thickness anodized film for housing
Trim:	Aluminum 6063
Glass:	Step tempered Glass. T=8mm
Loading capacity:	500 kgs
Cable Gland:	PG7 IP67
Gasket:	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve:	Anti-corrosion PVC. Black
Clip:	With SUS304 spring that's for deck lights or ceiling lights application




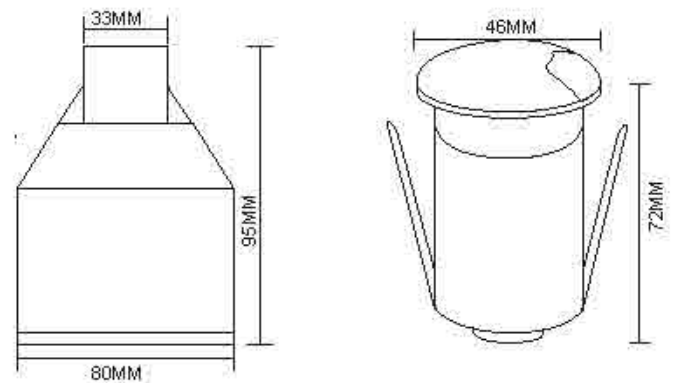


6000K 5000K 4000K 3000K 2700K

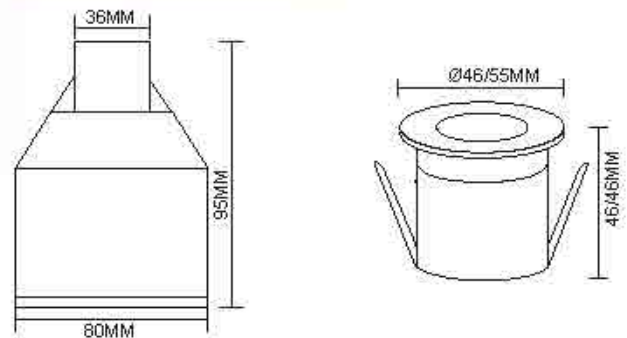





Parameter	
General Data	
Name	1W/ 3W LED Underground Light/ Deck Light/Step Light
Item No.	DKS 1W/ 3W
Power	1W/3W
LED type	CREE XBD
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	60°
Dimension	1W: Ø46x46 (mm), 3W: Ø55x46 (mm) Diameter x length
Cut out	With Mounting Sleeve: Ø80x95 (mm) Diameter x length Without Mounting Sleeve: Ø36mm
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12-24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x0.5mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~ 25µm thickness anodized film for housing.
Trim	SUS316
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Black
Clip	With SUS304 spring that's for deck lights or ceiling lights application

max. 50W
GU10

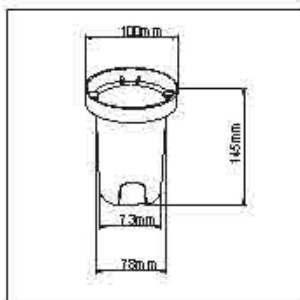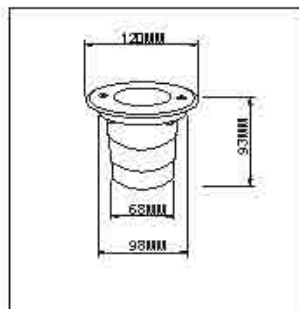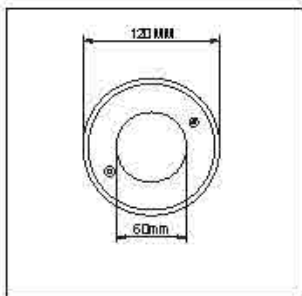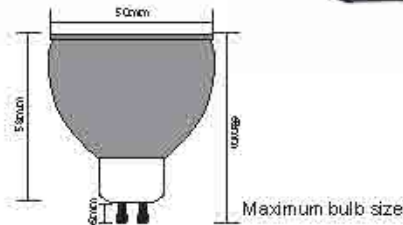




General Data	
Name	GU10 Underground Light
Item No.	HT-GU10
Power	Max 50W
Base type	GU10
Dimension	Ø120x135 (mm) Diameter x length
Cut out	Ø100x145 (mm) Diameter x length
Net weight	
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	90-265V AC
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x0.75mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK09
Housing	Die casting ADC #12 Aluminum
Protection finishing	Anti-corrosion coating 90~100µm thickness
Trim	Stainless steel 316
Glass	Step tempered Glass. T=8mm
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Black

max. 50W
GU10

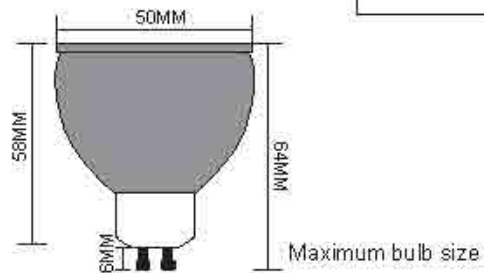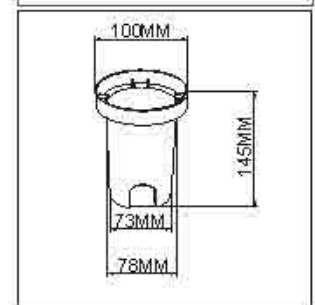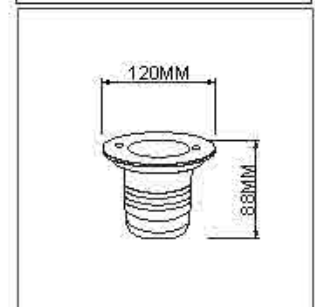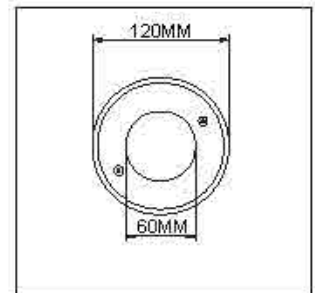



General Data		Construction Data	
Name	GU10 Underground Light	IP rating	IP67 Waterproof
Item No.	HT-GU10	IK rating	IK08
Power	Max 50W	Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Base type	GU10	Protection finishing	20~25µm thickness anodized film for housing, Dark grey
Luminous flux	/	Trim	SUS316
CCT	/	Glass	Step tempered Glass, T=8mm
CRI	/	Loading capacity	500 kgs
Beam angle	/	Cable Gland	PG7 IP67
Dimension	∅120x135 (mm) Diameter x length	Gasket	O-ring PMQ silicone seal
Cut out	∅100x145 (mm) Diameter x length	Accessories	
Net weight	0.83kg	Mounting Sleeve	Anti-corrosion PVC, Black
Warranty	5 Years	Clip	/
Certifications	CE, RoHS		
Electrical Data			
Input voltage	90-265VAC		
Insulation class	Class I		
Cable	1PC rubber cable 1M H05RN-F 3x0.75mm square		
Driver	/		

max. 50W
GU10

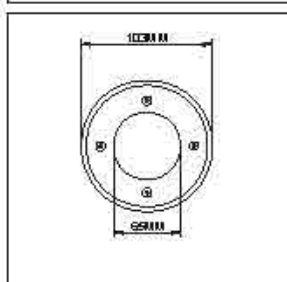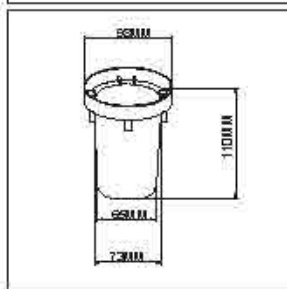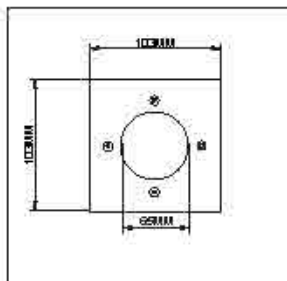

Parameter	
General Data	
Name: GU10 Underground Light	
Item No.	DMD-GU10
Power	Max 50W
Base type	GU10
Luminous flux	/
CCT	/
CRI	/
Beam angle	/
Dimension	Ø103x110 (mm) Diameter x length
Cut out	Ø100x120 (mm) Diameter x length
Net weight	
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	90-265V AC
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x0.75mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Die casting Aluminum
Protection finishing	Anti-corrosion coating 90~100µm thickness
Trim	Stainless steel 304 or 316
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG7IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Black


● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

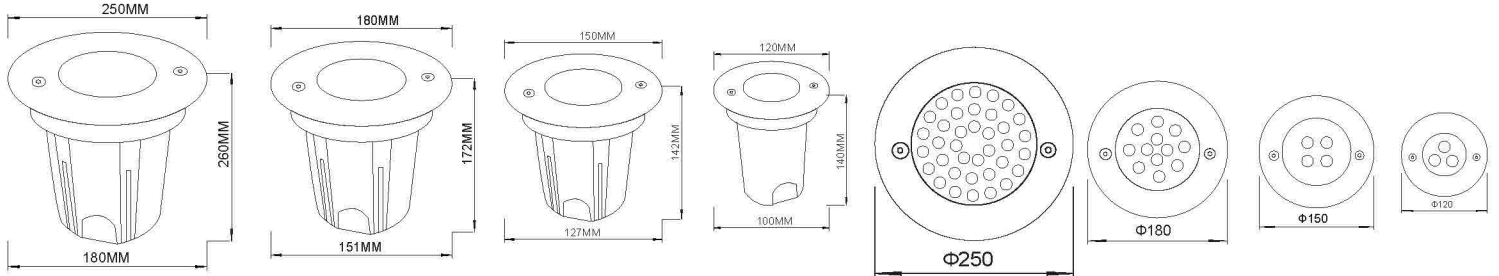

Parameter			
General Data		Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Name: LED 1W-36W Underground Light		Driver	Eaglerise
Item No.	Please see table below	Construction Data	
Power	3W, 6W, 9W, 12W, 18W, 24W, 36W	IP rating	IP67 Waterproof
LED type	CREE/Brigelix/Osram	IK rating	IK08
Luminous flux	80lm/W	Housing	Die casting ADC #12 Aluminum
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Protection finishing	Anti-corrosion coating 90~100µm thickness
CRI	80+	Trim	SUS316
Beam angle	10°, 15°, 30°, 45°, 60°, 90°, 120°	Glass	Step tempered Glass. T=8mm.
Dimension	Please see table below	Loading capacity	500 kgs
Cut out	Please see table below	Cable Gland	PG7 IP67
Warranty	5 Years	Gasket	O-ring PMQ silicone seal
Certifications	CE, RoHS	Accessories	
Electrical Data		Mounting Sleeve	Anti-corrosion PVC. Black
Input voltage	90-265V AC		
Insulation class	Class I		


Power	Model	Chip Brand	Driver brand	Material	Dimension
3W	UG601A	CREE/Brigelix/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø120x140mm
6W	UG602A	CREE/Brigelix/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø150x142mm
9W	UG603A	CREE/Brigelix/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø150x142mm
12W	UG604A	CREE/Brigelix/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø180x172mm
24W	UG606A	CREE/Brigelix/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø250x260mm
36W	UG607A	CREE/Brigelix/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø250x260mm

6000K 5000K 4000K 3000K 2700K

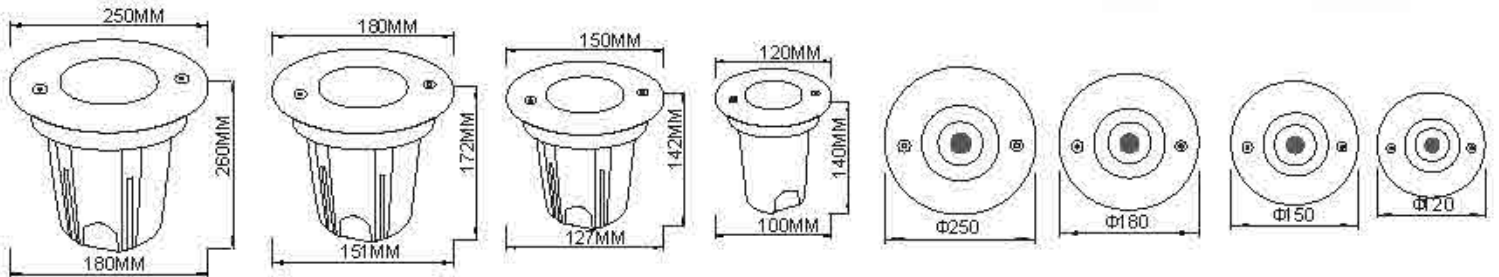

Parameter		Cable	1PC rubber cable 1MH05RN-F 3x1.0mm square
General Data		Driver	Eaglerise
Name: LED COB 5W-30W Underground Light		Construction Data	
Item No.	Please see table below	IP rating	IP67 Waterproof
Power	5W,10W,15W, 20W, 30W	IK rating	IK08
LED type	CREE/Brigelux/Osram COB	Housing	Die casting ADC #12 Aluminum
Luminous flux	80lm/W	Protection finishing	Anti-corrosion coating 90~100µm thickness
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Trim	SUS316
CRI	80+	Glass	Step tempered Glass. T=8mm
Beam angle	60°	Loading capacity	500 kgs
Dimension	Please see table below	Cable Gland	P G7 IP67
Cut out	Please see table below	Gasket	O-ring PMQ silicone seal
Warranty	5 Years	Accessories	
Certifications	CE, RoHS	Mounting Sleeve	Anti-corrosion PVC. Black
Electrical Data			
Input voltage	90-265V AC		
Insulation class	Class I		



Power	Model	Chip Brand	Driver brand	Material	Dimension
5W	UG601A	CREE /Brigelux/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø120x140mm
10W	UG602A	CREE /Brigelux/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø150x142mm
15W	UG604A	CREE /Brigelux/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø180x172mm
20W	UG606A	CREE /Brigelux/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø250x260mm
30W	UG607A	CREE /Brigelux/Osram	Eaglerise	SUS316+ ADC#12 Aluminum	Ø250x260mm

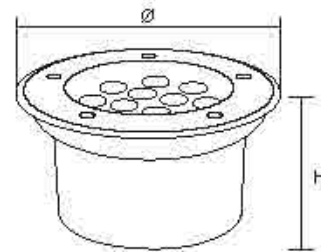

Parameter General Data		Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Name: LED 1W-36W Underground Light		Driver	Eaglerise
Item No.		Construction Data	
Power	Please see table below	IP rating	IP67 Waterproof
LED type	1W, 3W, 5W, 6W, 7W, 9W, 12W, 15W, 18W, 24W, 36W	IK rating	IK08
Luminous flux	CREE/Brigelux/Osram	Housing	SUS304/316+Die casting Aluminum
CCT	80lm/W	Protection finishing	Anti-corrosion coating 90~100µm thickness
CRI	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Trim	SUS304/316
Beam angle	80+	Glass	Step tempered Glass, T=8mm.
Dimension	10°, 15°, 30°, 45°, 60°, 90°, 120°	Loading capacity	500 kgs
Cut out	Please see table below	Cable Gland	PG7 IP67
Warranty	5 Years	Gasket	O-ring PMQ silicone seal
Certifications	CE, RoHS	Accessories	
Electrical Data		Mounting Sleeve	Anti-corrosion PVC .Black
Input voltage	90-265V AC		
Insulation class	Class I		

Power	Model	Chip Brand	Driver brand	Material	Dimension	Cutout
1W	DMD-1X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø65x H80mm	Ø60x H80mm
3W	DMD-3X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø80x H80mm	Ø75x H80mm
3W	DMD-3X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø100x H90mm	Ø95x H90mm
5W	DMD-5X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø120x H90mm	Ø115x H90mm
6W	DMD-6X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø130x H90mm	Ø115x H90mm
7W	DMD-7X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø150x H90mm	Ø125x H90mm
9W	DMD-9X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø160x H90mm	Ø140x H90mm
12W	DMD-12X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø180x H95mm	Ø155x H90mm
15W	DMD-15X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø200x H95mm	Ø185x H90mm
18W	DMD-18X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø220x H95mm	Ø205x H90mm
24W	DMD-24X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø250x H95mm	Ø235x H90mm
36W	DMD-36X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	Ø300x H95mm	Ø295x H90mm


6000K 5000K 4000K 3000K 2700K

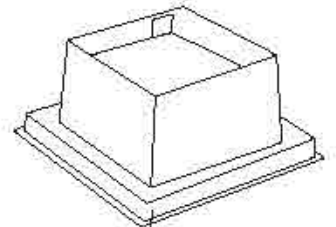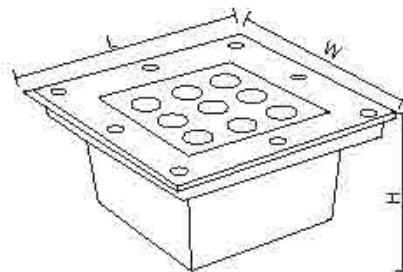

Parameter		Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
General Data		Driver	Eaglerise
Name:	LED 3W-36W Linear Underground Light	Construction Data	
Item No.	Please see table below	IP rating	IP67 Waterproof
Power	3W, 6W, 12W, 18W, 24W, 36W	IK rating	IK08
LED type	CREE/Brigelux/Osram	Housing	SUS304/316+Die casting Aluminum
Luminous flux	80lm/W	Protection finishing	Anti-corrosion coating 90~100µm thickness
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Trim	SUS304/316
CRI	80+	Glass	Step tempered Glass. T=8mm.
Beam angle	10°, 15°, 30°, 45°, 60°, 90°, 120°	Loading capacity	500 kgs
Dimension	Please see table below	Cable Gland	PG7 IP67
Cut out	Please see table below	Gasket	O-ring PMQ silicone seal
Warranty	5 Years	Accessories	
Certifications	CE, RoHS	Mounting Sleeve	Anti-corrosion PVC. Black
Electrical Data			
Input voltage	90-265V AC		
Insulation class	Class I		


Power	Model	Chip Brand	Driver brand	Material	Dimension	Cutout
3W	DMF-3X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	95x95x90mm	L90xW90xH90mm
4W	DMF-4X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	120x120x90mm	L115xW115xH90mm
5W	DMF-5X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	140x140x90mm	L135xW135xH90mm
9W	DMF-9X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	150x150x90mm	L135xW135xH90mm
9W	DMF-9X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	160x160x90mm	L155xW155xH90mm
12W	DMF-12X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	190x190x90mm	L180xW180xH90mm
18W	DMF-18X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	200x200x90mm	L185xW185xH90mm
24W	DMF-24X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	220x220x90mm	L205xW205xH90mm
24W	DMF-24X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	250x250x90mm	L235xW235xH90mm
36W	DMF-36X1W	CREE/Brigelux/Osram	Eaglerise	SUS316+Die casting Aluminum	300x300x90mm	L285xW285xH90mm

6000K 5000K 4000K 3000K 2700K

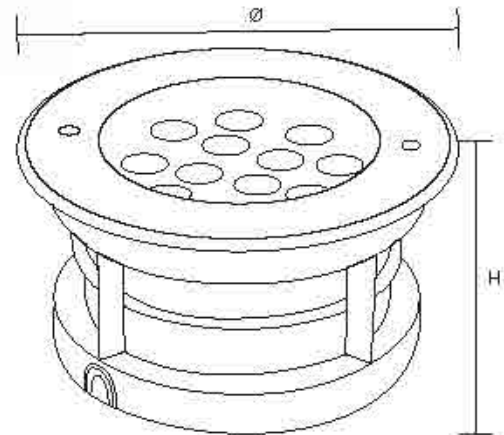

Parameter		Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
General Data		Driver	Eaglerise
Name: LED COB 6W-48W Underground Light		Construction Data	
Item No.	Please see table below	IP rating	IP67 Waterproof
Power	6W, 9W, 12W, 18W, 24W, 36W, 48W	IK rating	IK08
LED type	CREE/Brigellux/Osram	Housing	Die casting ADC #12 Aluminum
Luminous flux	80lm/W	Protection finishing	Anti-corrosion coating 90~100µm thickness
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Trim	SUS316
CRI	80+	Glass	Step tempered Glass. T=8mm.
Beam angle	10°, 15°, 30°, 45°, 60°, 90°, 120°	Loading capacity	500 kgs
Dimension	Please see table below	Cable Gland	PG7 IP67
Cut out	Please see table below	Gasket	O-ring PMQ silicone seal
Warranty	5 Years	Accessories	
Certifications	CE, RoHS	Mounting Sleeve	Anti-corrosion PVC. Black
Electrical Data			
Input voltage	90-265V AC		
Insulation class	Class I		



Power	Model	Chip Brand	Driver brand	Material	Dimension	Cutout
6W	DMV-6X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø150x90mm	Ø125xH100mm
9W	DMV-9X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø160x90mm	Ø140xH100mm
12W	DMV-12X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø180x90mm	Ø155xH100mm
18W	DMV-18X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø200x90mm	Ø185xH100mm
24W	DMV-24X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø220x90mm	Ø205xH100mm
36W	DMV-36X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø250x90mm	Ø235xH100mm
48W	DMV-48X1W	CREE/Brigellux/Osram	Eaglerise	SUS316+ Die casting Aluminum	Ø300x90mm	Ø295xH100mm

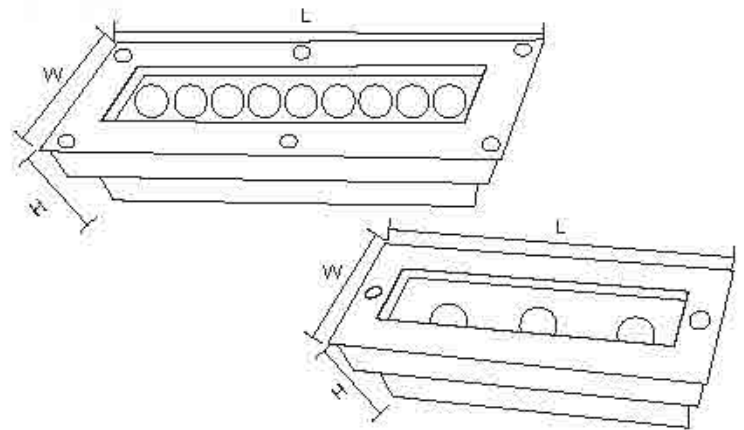

Parameter		Insulation class	Class I
General Data		Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Name: LED 3W-36W Linear Underground Light		Driver	Eaglerise
Item No.	Please see table below	Construction Data	
Power	3W, 6W, 12W, 18W, 24W, 36W	IP rating	IP67 Waterproof
LED type	CREE/Brigelux/Osram	IK rating	IK08
Luminous flux	80lm/W	Housing	SUS304/316+Die casting Aluminum
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Protection finishing	Anti-corrosion coating 90~100µm thickness
CRI	80+	Trim	SUS304/316
Beam angle	10°, 15°, 30°, 45°, 60°, 90°, 120°	Glass	Step tempered Glass. T=8mm
Dimension	Please see table below	Loading capacity	500 kgs
Cut out	Please see table below	Cable Gland	PG7 IP67
Warranty	5 Years	Gasket	O-ring PMQ silicone seal
Certifications	CE, RoHS	Accessories	
Electrical Data		Mounting Sleeve	Anti-corrosion PVC. Black
Input voltage	90-265V AC		

Power	Model	Chip Brand	Driver brand	Material	Dimension	Cutout
3W	DML-3X1W	CREE/Brigelux/Osram	Eaglerise	SS316 +Die casting Aluminum	200x80mm	190x75mm
6W	DML-3X1W	CREE/Brigelux/Osram	Eaglerise	SS316	300x90mm	190x75mm
12W	DML-12X1W	CREE/Brigelux/Osram	Eaglerise	+Die casting Aluminum	500x90mm	485x75mm
18W	DML-18X1W	CREE/Brigelux/Osram	Eaglerise	SS316	650x90mm	635x75mm
24W	DML-24X1W	CREE/Brigelux/Osram	Eaglerise	+Die casting Aluminum	1000x90mm	985x75mm
36W	DML-36X1W	CREE/Brigelux/Osram	Eaglerise	SS316	1200x90mm	1185x75mm

6000K 5000K 4000K 3000K 2700K

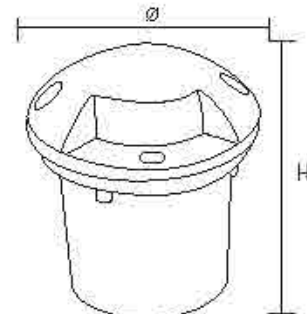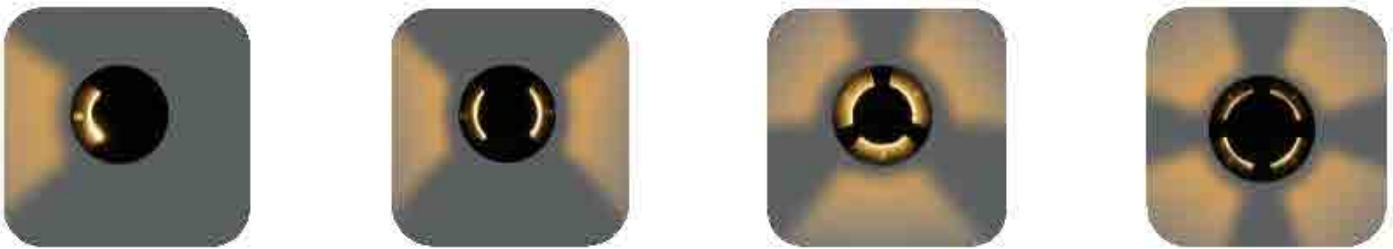

Parameter		Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
General Data		Driver	Eaglerise
Name: LED COB 3W-24W Side Emitting Underground Light		Construction Data	
Item No.	Please see table below	IP rating	IP67 Waterproof
Power	3W, 5W, 6W, 9W, 12W, 18W,	IK rating	IK08
LED type	CREE/Brigelix/Osram	Housing	Die casting Aluminum
Luminous flux	50lm/W	Protection finishing	Anti-corrosion coating 90-100µm thickness
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Trim	Die casting Aluminum
CRI	80+	Glass	Step tempered Glass. T=8mm
Beam angle	C1, C2, C3, C4	Loading capacity	500 kgs
Dimension	Please see table below	Cable Gland	PG7 IP67
Cut out	Please see table below	Gasket	O-ring PMQ silicone seal
Warranty	5 Years	Accessories	
Certifications	CE, RoHS	Mounting Sleeve	Anti-corrosion PVC. Black
Input voltage	90-265V AC		
Insulation class	Class I		

Power	Model	Chip Brand	Driver brand	Material	Dimension	Cutout
3W	DMH-3X1W	CREE/Brigelix/Osram	Eaglerise	Die casting Aluminum	Ø100xH120mm	Ø95x90mm
5W	DMH-5X1W	CREE/Brigelix/Osram	Eaglerise	Die casting Aluminum	Ø120xH120mm	Ø116x90mm
6W	DMH-6X1W	CREE/Brigelix/Osram	Eaglerise	Die casting Aluminum	Ø150xH120mm	Ø135x90mm
9W	DMH-9X1W	CREE/Brigelix/Osram	Eaglerise	Die casting Aluminum	Ø160xH120mm	Ø145x100mm
12W	DMH-12X1W	CREE/Brigelix/Osram	Eaglerise	Die casting Aluminum	Ø180xH120mm	Ø165x90mm
15W	DMH-18X1W	CREE/Brigelix/Osram	Eaglerise	Die casting Aluminum	Ø200xH120mm	Ø185x90mm

02



LED Garden Spike Light



● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



20W




15W



10W



3W/5W


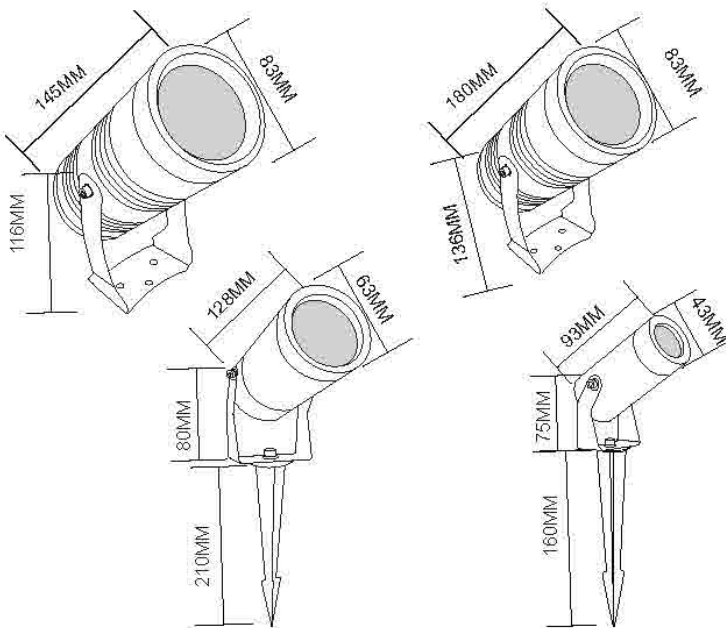


Parameter	
General Data	
Name: LED 3W/5W/10W/15W/20W COB Garden Spike Light	
Item No.	Please see table below
Power	3W/5W/10W/15W/20W
LED type	CREE/Brigelix/Osram
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	24°, 40°
Dimension	Please see table below
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	90-265V AC or DC12, DC24V
Insulation class	Class I, Class III
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square, 1PC rubber cable 1M H05RN-F 2x1.0mm square,
Driver	Eaglerise
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	6063 Aluminum
Protection finishing	Anti-corrosion coating 90~100µm thickness
Glass	Step tempered Glass. T=8mm
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Spike	Aluminum

Power	Model	Chip Brand	Driver brand	Material	Dimension
3W	SPCOB 3W	CREE/Brigelix/Osram	Eaglerise	6063 Aluminum	Ø43x93mm
5W	SPCOB 5W	CREE/Brigelix/Osram	Eaglerise	6063 Aluminum	Ø43x93mm
10W	SPCOB 10W	CREE/Brigelix/Osram	Eaglerise	6063 Aluminum	Ø63x128mm
15W	SPCOB 15W	CREE/Brigelix/Osram	Eaglerise	6063 Aluminum	Ø83x145mm
20W	SPCOB 20W	CREE/Brigelix/Osram	Eaglerise	6063 Aluminum	Ø83x180mm

6000K 5000K 4000K 3000K 2700K

max. 50W
GU10

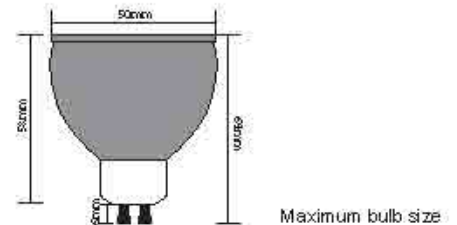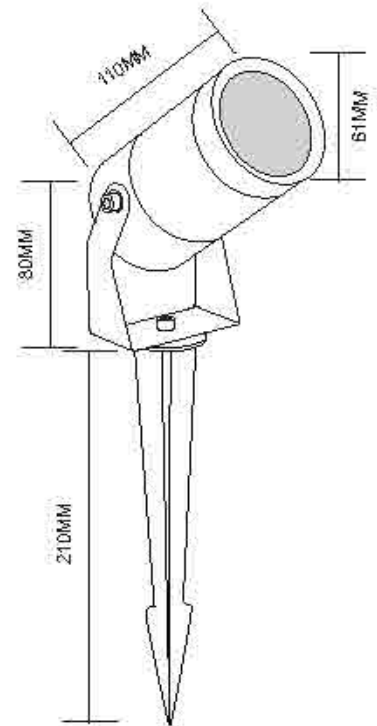


General Data	
Name	GU10 Garden Spike
Item No.	SPH01
Power	Max 50W
Base type	GU10
Dimension	Ø61x110 (mm)
Net weight	0.6kg
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	90-265V AC
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x0.75mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	6063 Aluminum
Protection finishing	Anti-corrosion coating 90~100µm thickness
Glass	Step tempered Glass, T=8mm
Loading capacity	500 kgs
Cable Gland	PG7 IP 67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Spike	Aluminum


6000K 5000K 4000K 3000K 2700K



max. 50W
GU10

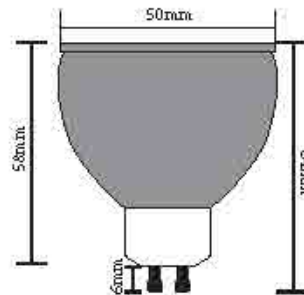


Maximum bulb size

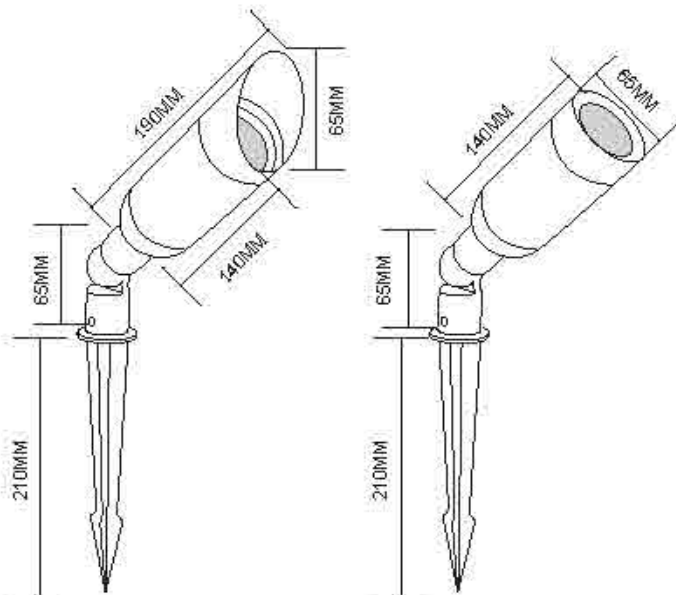


Parameter	
General Data	
Name:	LED 10W GU10 Garden Spike Light
Item No.	ENX10VV
Power	10W
LED type	CREE/Brigelix/Osram
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	15°, 25°, 40°
Dimension	∅65mm
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	90-265V AC or DC12, DC24V
Insulation class	Class I, Class III
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square, 1PC rubber cable 1M H05RN-F 2x1.0mm square, Eaglerise
Driver	
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	6063 Aluminum
Protection finishing	Anti-corrosion coating 90~100µm thickness
Glass	Step tempered Glass. T=8mm.
Loading capacity	500 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Spike	Aluminum

03

LED Underwater Light

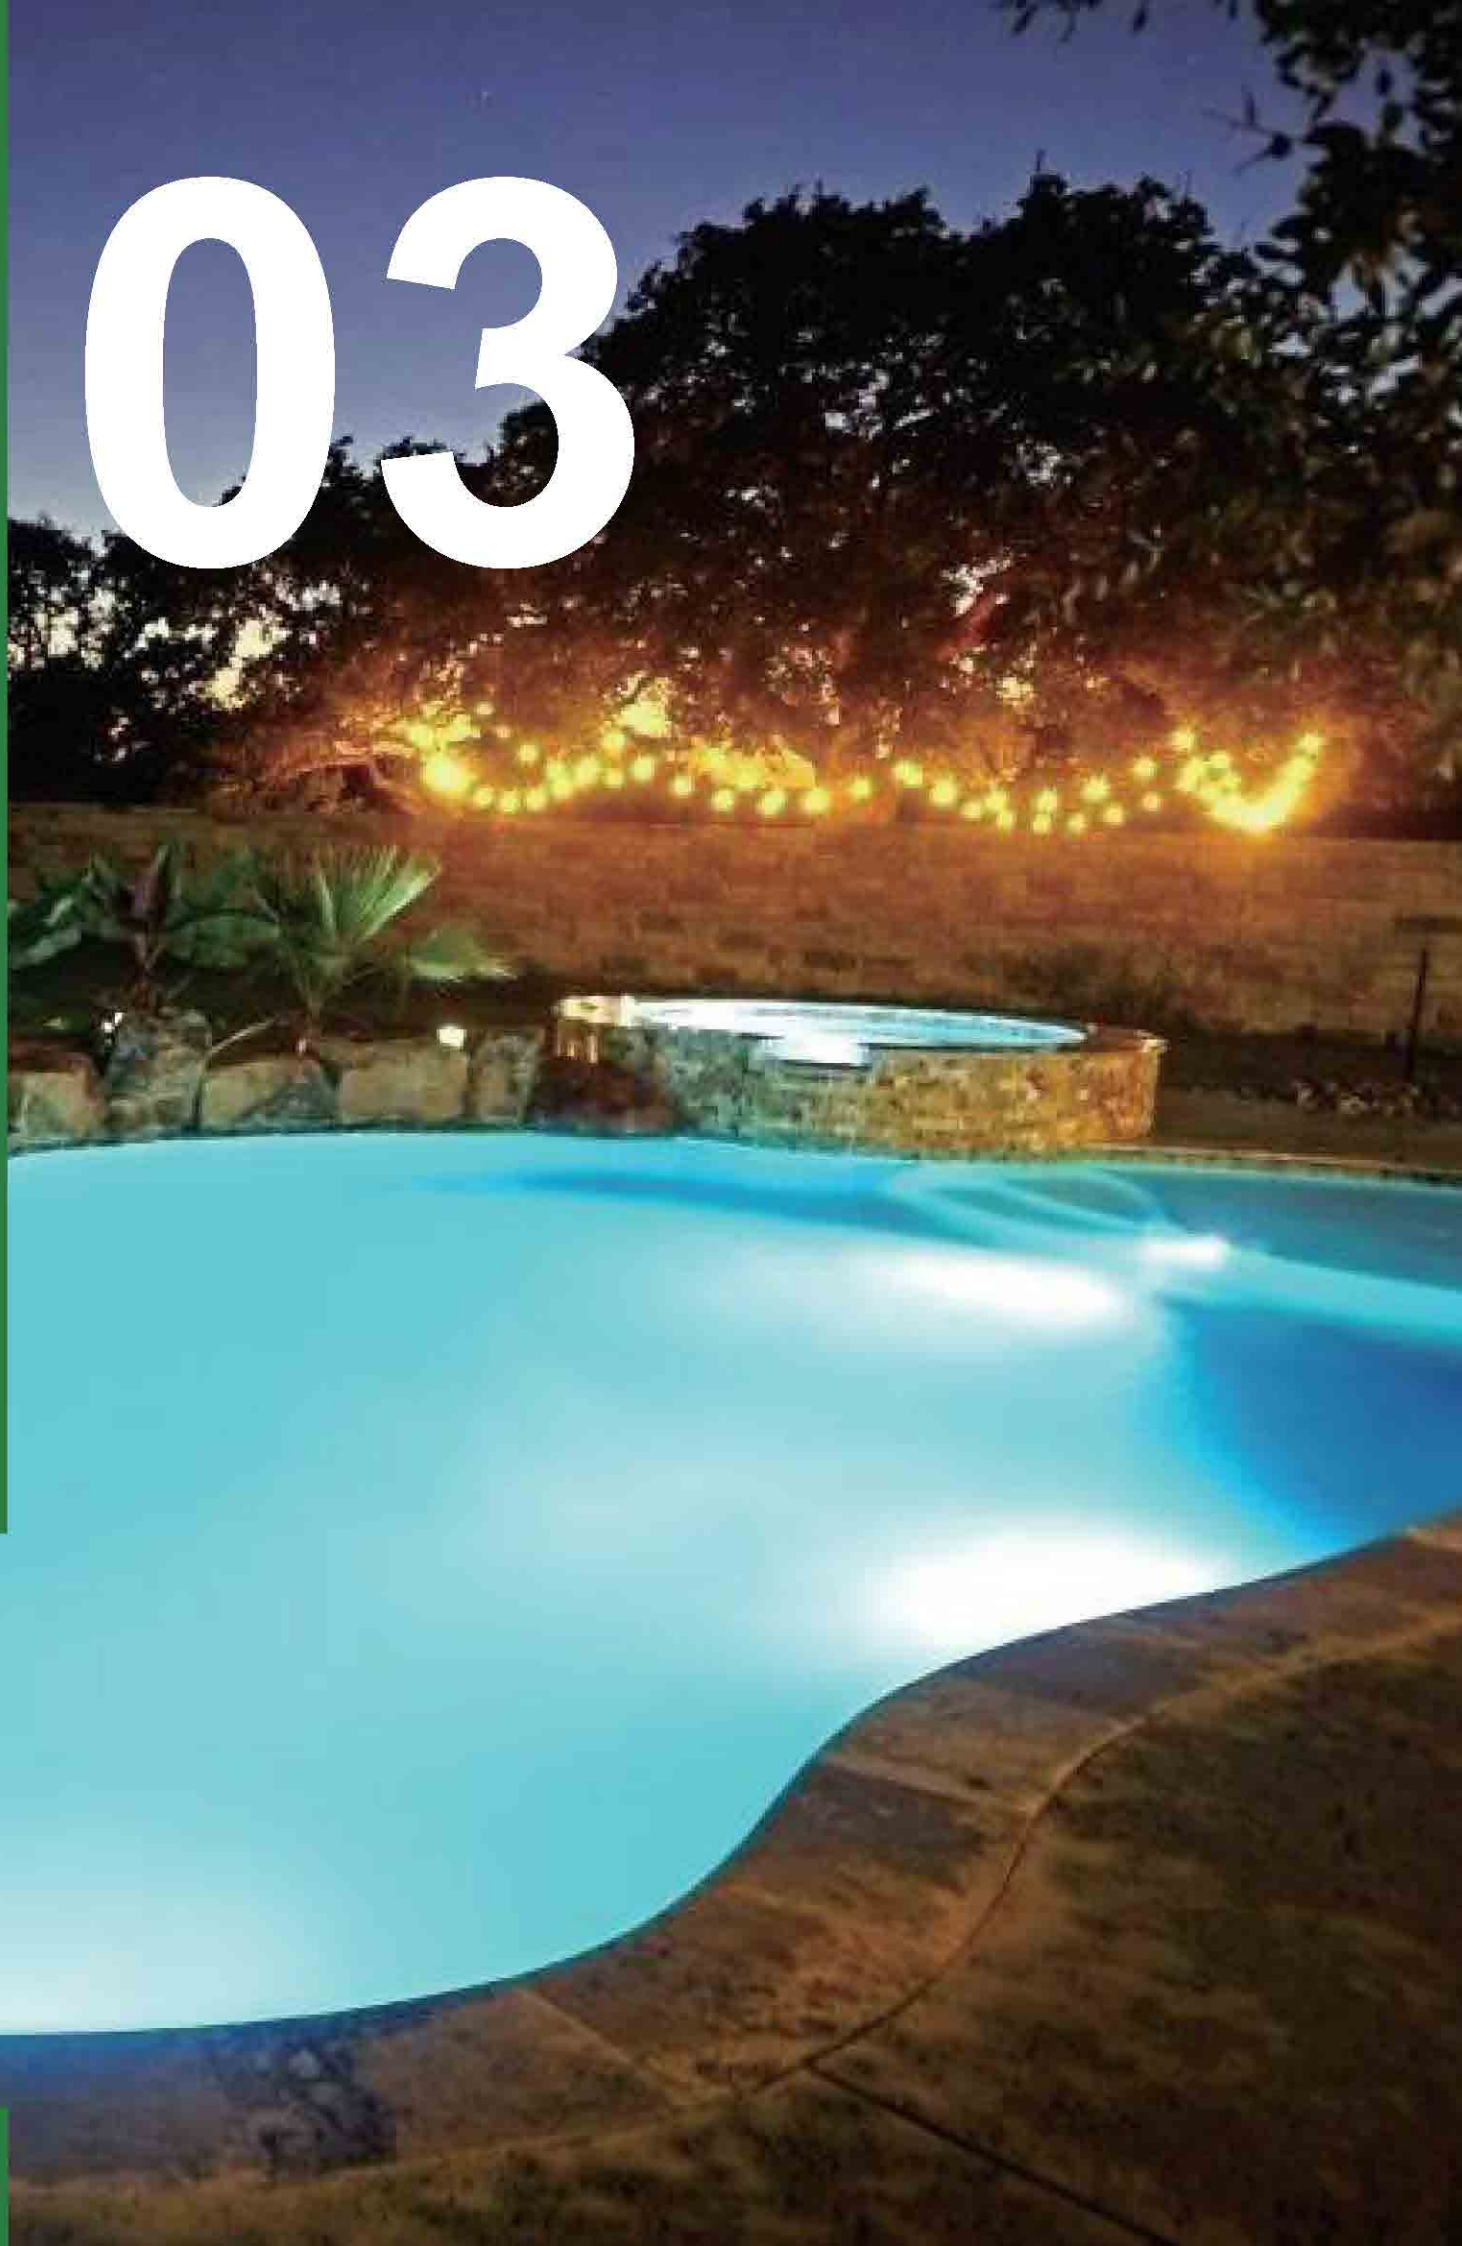


6000K 5000K 4000K 3000K 2700K

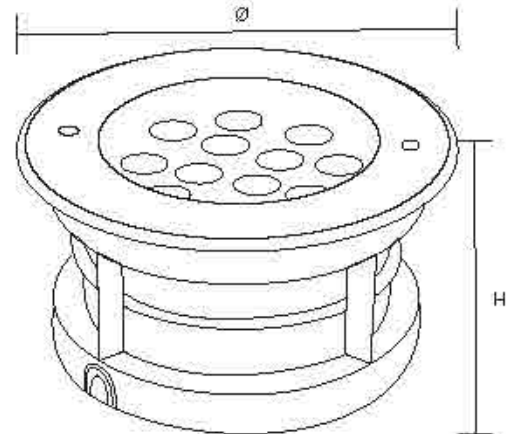

Parameter		Insulation class	Class III
General Data		Cable	1PC rubber cable 1M H05RN-F 2x1.0mm square,
Name: LED 3W/5W/6W/9W/12W/18W Underwater Light		Driver	Done
Item No.	Please see table below	Construction Data	
Power	3W/5W/6W/9W/12W/18W	IP rating	IP68 Waterproof
LED type	CREE/Brigelux/Osram	IK rating	IK08
Luminous flux	80lm/W	Housing	SUS304
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B	Protection finishing	SUS
CRI	80+	Glass	Step tempered Glass. T=10mm..
Beam angle	30°, 45°, 60°, 90°, 120°	Loading capacity	500 kgs
Dimension	Please see table below	Cable Gland	IP68
Warranty	5 Years	Gaske	O-ring PMQ silicone seal
Certifications	CE, RoHS		
Electrical Data			
Input voltage	DC12V		

Power	Model	Chip Brand	Driver brand	Material	Dimension
3W	DMS 3W	CREE/Brigelux/Osram	Done	SUS304	Ø90xH90mm
3W	DMS1 3W	CREE/Brigelux/Osram	Done	SUS304	Ø100xH80mm
5W	DMS 5W	CREE/Brigelux/Osram	Done	SUS304	Ø120xH90mm
6W	DMS 6W	CREE/Brigelux/Osram	Done	SUS304	Ø130xH90mm
9W	DMS 9W	CREE/Brigelux/Osram	Done	SUS304	Ø145xH90mm
12W	DMS 12W	CREE/Brigelux/Osram	Done	SUS304	Ø160xH100mm
12W	DMS1 12W	CREE/Brigelux/Osram	Done	SUS304	Ø170xH130mm
18W	DMS 18W	CREE/Brigelux/Osram	Done	SUS304	Ø200xH100mm


6000K 5000K 4000K 3000K 2700K

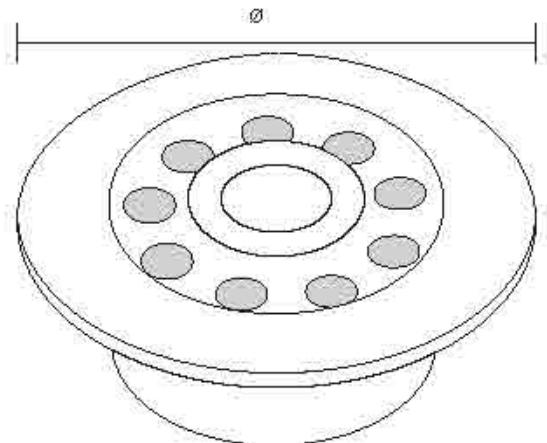

Parameter:	
General Data	
Name: LED 6W/9W/12W/15W/18W/24W Fountain Light	
Item No.	Please see table below
Power	6W/9W/12W/15W/18W/24W
LED type	CREE/Brigelux/Osram
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	30°, 45°, 60°, 90°, 120°
Dimension	Please see table below
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12,
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1.0mm square,
Driver	Done
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK08
Housing	SUS304
Protection finishing	SUS
Glass	Step tempered Glass. T=10mm.
Loading capacity	500 kgs
Cable Gland	IP68
Gasket	O-ring PMQ silicone seal

Power	Model	Chip Brand	Driver brand	Material	Dimension
6W	SDP6W	CREE/Brigelux/Osram	Done	SUS304	∅150mm
9W	SDP9W	CREE/Brigelux/Osram	Done	SUS304	∅170mm
12W	SDP12W	CREE/Brigelux/Osram	Done	SUS304	∅180mm
15W	SDP15W	CREE/Brigelux/Osram	Done	SUS304	∅210mm
18W	SDP18W	CREE/Brigelux/Osram	Done	SUS304	∅230mm
24W	SDP24W	CREE/Brigelux/Osram	Done	SUS304	∅250mm


6000K 5000K 4000K 3000K 2700K

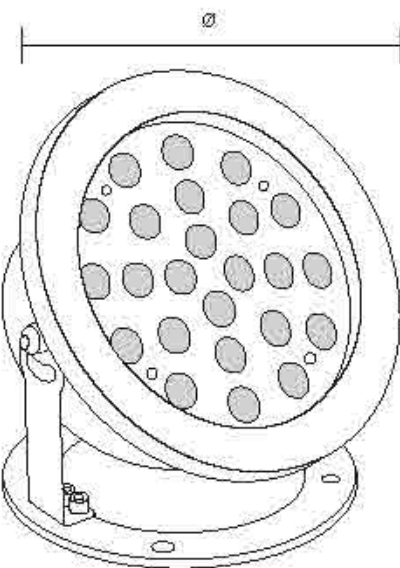

Parameter	
General Data	
Name	LED 6W/9W/12W/15W/18W/24W/36W Underwater Light
Item No.	Please see table below
Power	6W/9W/12W/15W/18W/24W/36W
LED type	CREE /Brigelux/Osram
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	30°, 45°, 60°, 90°, 120°
Dimension	Please see table below
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1.0mm square,
Driver	Done
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK08
Housing	SUS304
Protection finishing	SUS
Glass	Step tempered Glass. T=10mm
Loading capacity	500 kgs
Cable Gland	IP68
Gasket	O-ring PMQ silicone seal

Power	Model	Chip Brand	Driver brand	Material	Dimension
6W	SDS6W	CREE/Brigelux/Osram	Done	SUS304	Ø135mm
9W	SDS9W	CREE/Brigelux/Osram	Done	SUS304	Ø145mm
12W	SDS12W	CREE/Brigelux/Osram	Done	SUS304	Ø170mm
15W	SDS15W	CREE/Brigelux/Osram	Done	SUS304	Ø190mm
18W	SDS18W	CREE/Brigelux/Osram	Done	SUS304	Ø215mm
24W	SDS24W	CREE/Brigelux/Osram	Done	SUS304	Ø250mm
36W	SDS36W	CREE/Brigelux/Osram	Done	SUS304	Ø300mm


6000K 5000K 4000K 3000K 2700K

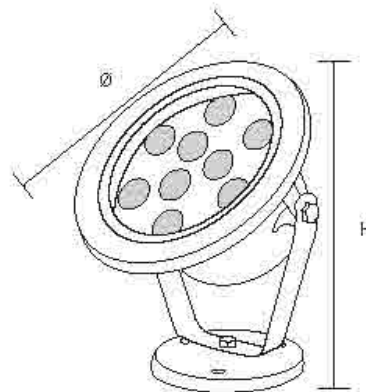

Parameter	
General Data	
Name: LED 3W/5W/7W/9W/12W/15W/18W/24W/36W Underwater Light	
Item No.	Please see table below
Power	3W/5W/7W/9W/12W/15W/18W/24W/36W
LED type	CREE/Brigelux/Osram
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	30°, 45°, 60°, 90°, 120°
Dimension	Please see table below
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1.0mm square
Driver	Done
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK08
Housing	SUS304
Protection finishing	SUS
Glass	Step tempered Glass. T=10mm.
Loading capacity	500 kgs
Cable Gland	IP68
Gasket	O-ring PMQ silicone seal

Power	Model	Chip Brand	Driver brand	Material	Dimension
3W	SDH 3W	CREE/Brigelux/Osram	Done	SUS304	Ø90xH140mm
3W	SDH1 3W	CREE/Brigelux/Osram	Done	SUS304	Ø105xH155mm
3W	SDH2 3W	CREE/Brigelux/Osram	Done	SUS304	Ø105xH130mm
5-7W	SDH5-7W	CREE/Brigelux/Osram	Done	SUS304	Ø120xH150mm
6-9W	SDH6-9W	CREE/Brigelux/Osram	Done	SUS304	Ø145xH180mm
9-12W	SDH9-12W	CREE/Brigelux/Osram	Done	SUS304	Ø160xH220mm
15W	SDH15W	CREE/Brigelux/Osram	Done	SUS304	Ø170xH225mm
18W	SDH18W	CREE/Brigelux/Osram	Done	SUS304	Ø190xH225mm
24W	SDH24W	CREE/Brigelux/Osram	Done	SUS304	Ø205xH265mm
36W	SDH36W	CREE/Brigelux/Osram	Done	SUS304	Ø230xH1250mm

6000K 5000K 4000K 3000K 2700K

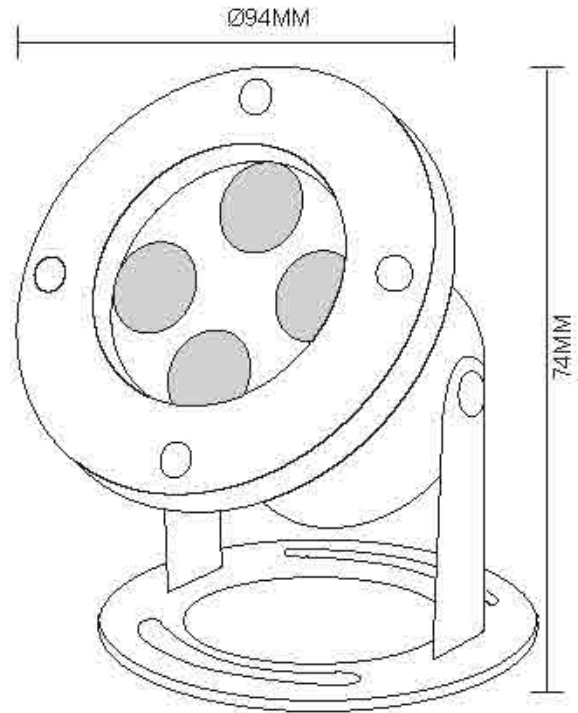


Parameter	
General Data	
Name:	LED 3x1W, 3X3W, 4X1W,4X3W Underwater Light
Item No.	SDD
Power	3x1W, 3X3W, 4X1W,4X3W
LED type	CRE E/Brigellux/Osram
Luminous flux	80lm/W
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	30°, 45°, 60°, 90°, 120°
Dimension	Ø94x74mm
Warranty	5 Years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1.0mm square,
Driver	Done
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK08
Housing	SUS304
Protection finishing	SUS
Glass	Step tempered Glass. T=10mm.
Loading capacity	500 kgs
Cable Gland	IP68
Gasket	O-ring PMQ silicone seal

04

Outdoor LED Step Light






6000K 5000K 4000K 3000K 2700K


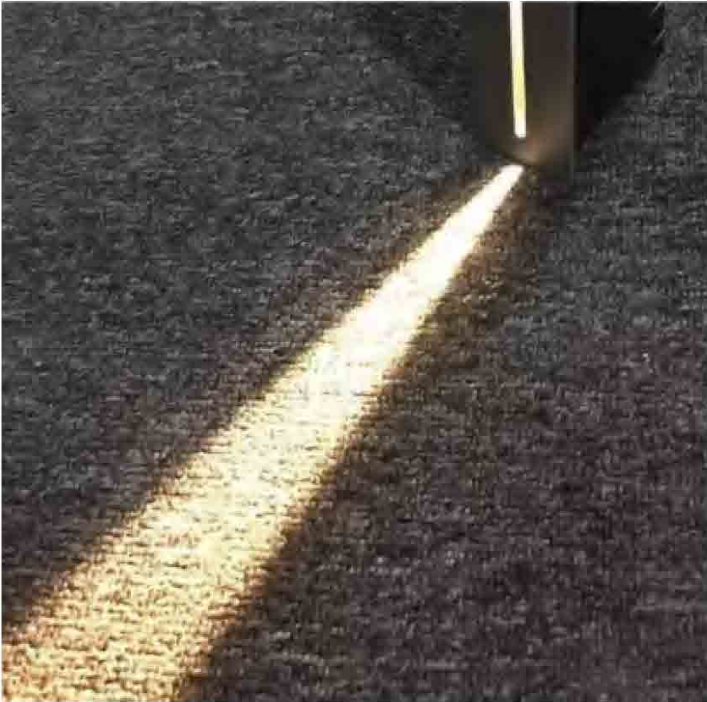





ST081, ST082, ST083 Name:
Outdoor LED 3W Wall Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

Dimension:
Dimension: ST081 105*60*60MM Cutout:101*57*52MM (S)
ST082 180*58*80MM Cutout:175*53*75MM (M)
ST083 210*60*55MM Cutout:205*55*50MM (L)

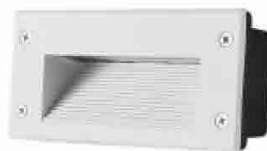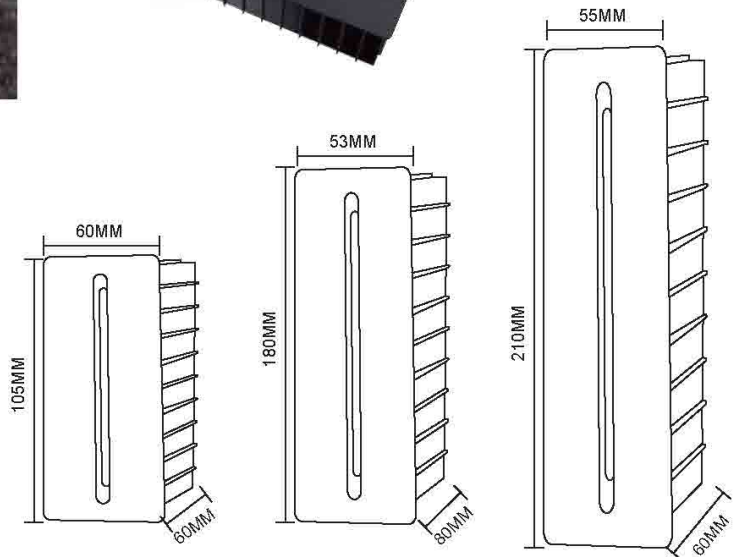

F868
Name: Outdoor LED 3W Wall Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White
Dimension: 145X70X50mm
Cutout:140*65*55mm

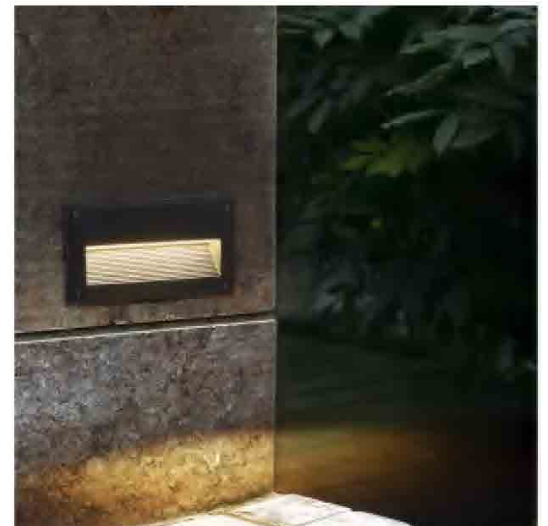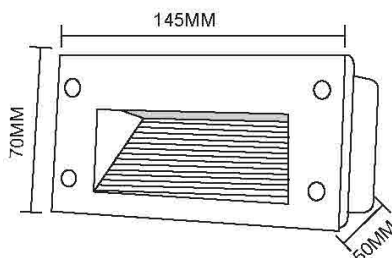

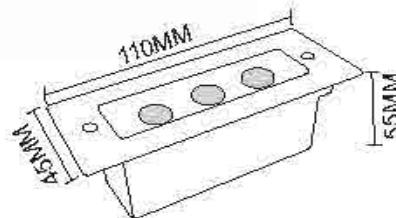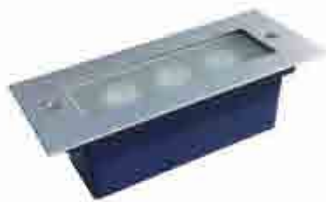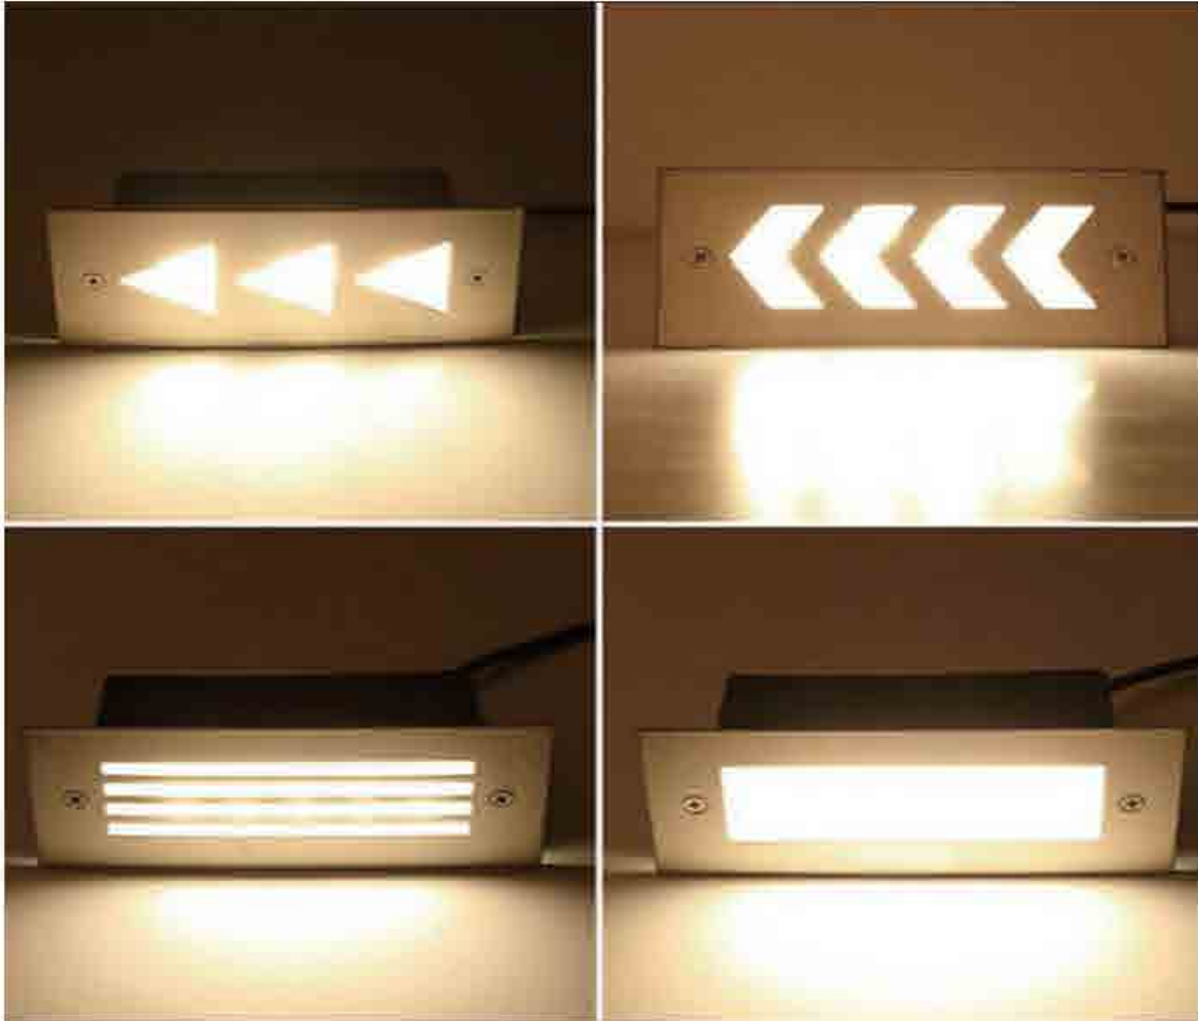

ST 25, ST26, ST27,
Name: Outdoor LED 3W/ 6W Recessed Step Light
Power: 3W/6W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
SUS304/316+Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Power	Model	Chip Brand	Driver brand	Material	
3W	ST 25	Epistar SMD	Eaglerise	SUS316/ SUS304+Die casting Aluminum	110x45x55mm
3W	ST 26	Epistar SMD	Eaglerise	SUS316/ SUS304+Die casting Aluminum	110x45x55mm
3W	ST 27	Epistar SMD	Eaglerise	SUS316/ SUS304+Die casting Aluminum	110x45x55mm
6W	ST 25	Epistar SMD	Eaglerise	SUS316/ SUS304+Die casting Aluminum	170x70x55mm
6W	ST 26	Epistar SMD	Eaglerise	SUS316/ SUS304+Die casting Aluminum	170x70x55mm
6W	ST 27	Epistar SMD	Eaglerise	SUS316/ SUS304+Die casting Aluminum	170x70x55mm




6000K 5000K 4000K 3000K 2700K



ST690S, WL690L
Name: Outdoor LED 1W/3W Recessed Step Light
Power: 1W/3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 1W/55x55x45mm, 3W/80x80x50mm

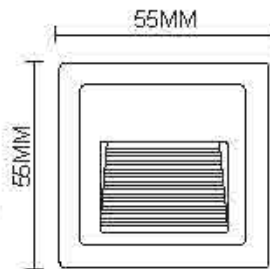

ST 690Y
Name: Outdoor LED 3W Recessed Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: $\varnothing 85 \times 50$ mm



ST 691
Name: Outdoor LED 6W Surface Mounted Step Light
Power: 6W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 225x81x30mm

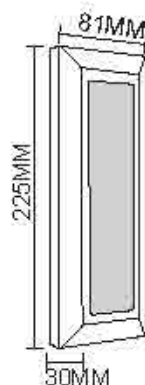

ST 692
Name: Outdoor LED 6W Surface Mounted Step Light
Power: 6W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 225x81x30mm

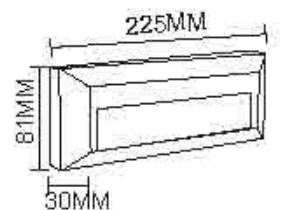



6000K 5000K 4000K 3000K 2700K



ST 705S, ST 705L
Name: Outdoor LED 3W/6W Recessed Step Light
Power: 3W/6W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class I
Color: Silver Grey/Dark Grey/Black/White





Dimension: 3W/105x60x60mm, 6W/ 210x65x60mm



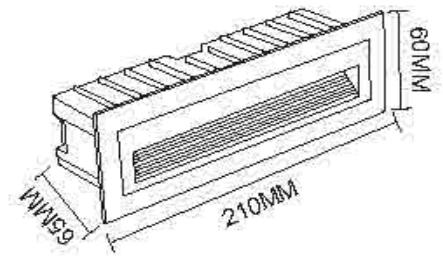
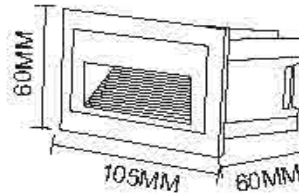


ST 706S, ST 706L
Name: Outdoor LED 3W/6W Recessed Step Light
Power: 3W/6W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 3W/105x60x60mm, 6W/ 210x65x60mm

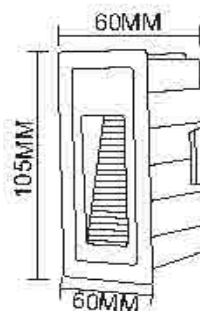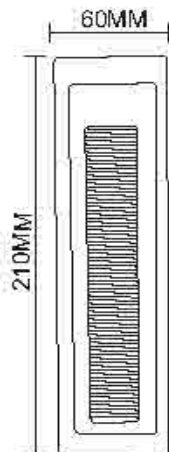

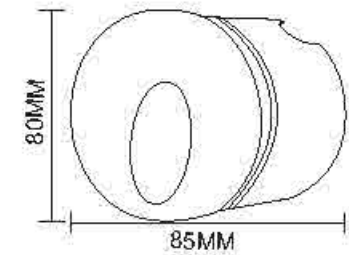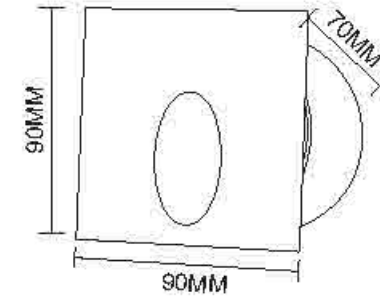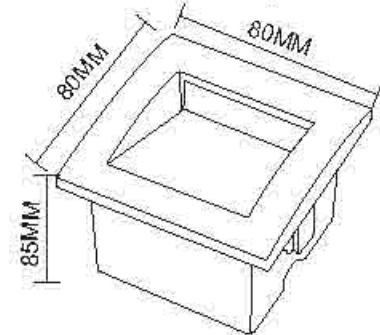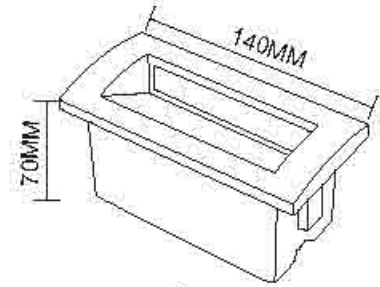

ST084, ST085, ST086, ST087
 Name: Outdoor LED 3W Wall Light
 Power: 3W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White

Dimension: ST084 Ø80*85MM

ST085 80*80*85MM

ST086 90*90*70MM

ST087 140*70MM



05

Outdoor LED Wall Light




6000K 5000K 4000K 3000K 2700K



WLD111
Name: Outdoor LED COB 3W/GU10 Wall Light
Power: 3W/GU10
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White






Dimension: 65x80x80mm

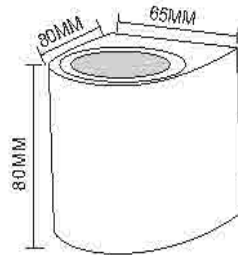

WLD110
Name: Outdoor LED COB 2x 3W/GU10 Up and Down Wall Light
Power: 2x3W/GU10
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 65x80x150mm

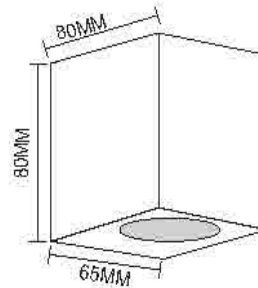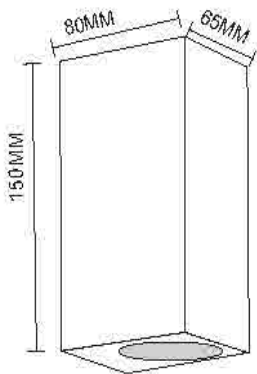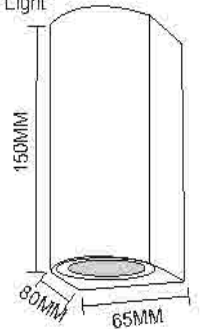

WLD112
Name: Outdoor LED COB 2x 3W/GU10 Up and Down Wall Light
Power: 2x3W/GU10
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 65x80x150mm



WLD113
Name: Outdoor LED COB 3W/GU10 Wall Light
Power: 3W/GU10
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 65x80x80mm



6000K 5000K 4000K 3000K 2700K




WL0116
Name: Outdoor LED COB 2x7W Wall Light
Power: 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

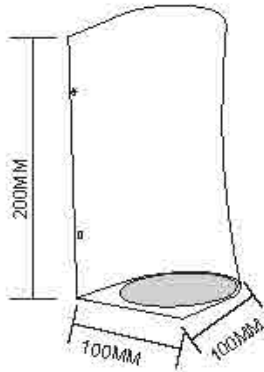


Dimension: 200x100x100mm




WL0114, WL0115
Name: Outdoor LED COB 1x7W/ 2x7W Wall Light
Power: 1x7W/ 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 1x7W/100x100x100mm, 2x7W/200x100x100mm

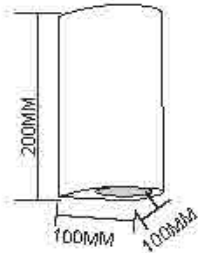

WL0117
Name: Outdoor LED COB 2x7W Wall Light
Power: 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

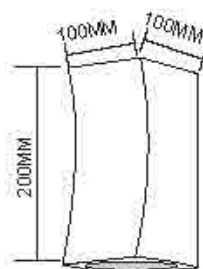


Dimension: 200x100x100mm




WL5110, WL5111, WL5112, WL5113
Name: Outdoor LED 2x3W, 2x6W, 2X10W, 2X12W Wall Light
Power: 2x3W, 2x6W, 2X10W, 2X12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension:
2x3W, 115x90x35mm
2x6W, 175x90x35mm
2X10W, 300x90x35mm
2X12W, 400x90x35mm

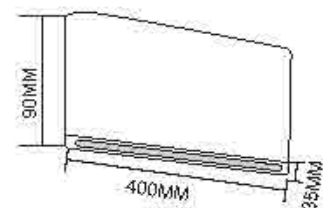


6000K 5000K 4000K 3000K 2700K

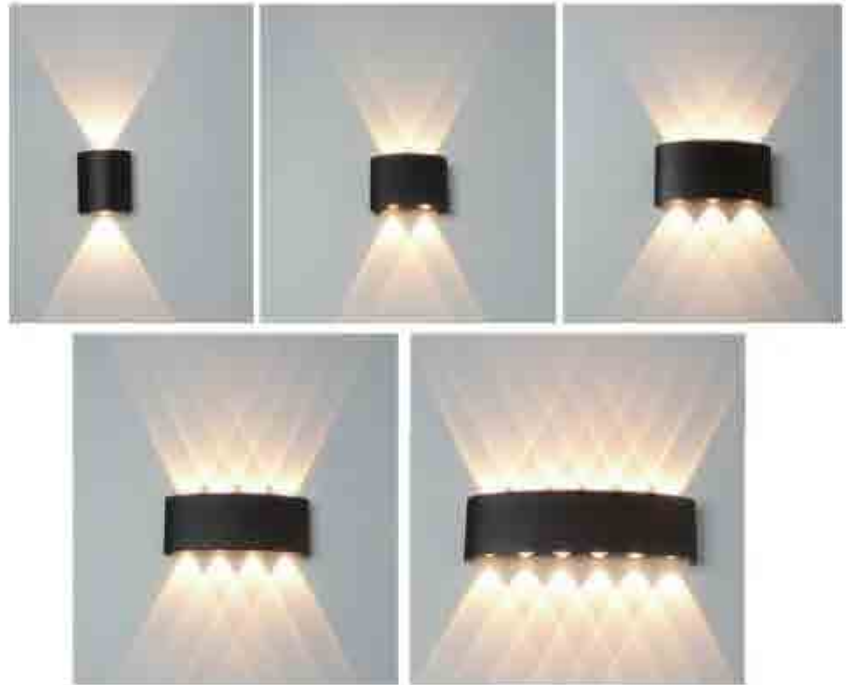

WL5116, WL5117, WL5112, WL5113
 Name: Outdoor LED 2x3W, 4x3W, 6x3W, 8x3W, 10x3W, 12x3W Wall Light
 Power: 2x3W, 4x3W, 6x3W, 8x3W, 10x3W, 12x3W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White




Dimension:
 2x3W, 80x70x38mm
 4x3W, 120x92x38mm
 6x3W, 185x95x40mm
 8x3W, 220x95x50mm
 10x3W, 230x95x38mm
 12x3W, 300x95x38mm

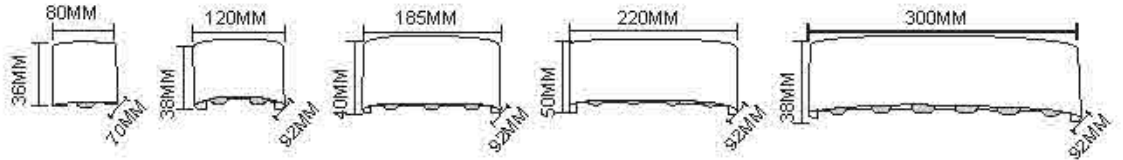

WL601
 Name: Outdoor LED 10W Wall Light
 Power: 10W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White




Dimension: 130x100x230mm

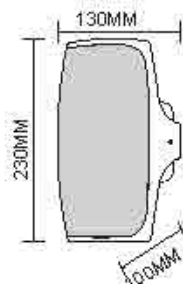

WL5185
 Name: Outdoor LED 1X10W Wall Light
 Power: 1X10W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White



Dimension: 400x130x283mm

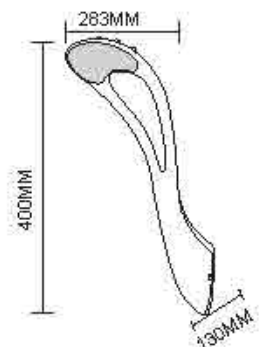


6000K 5000K 4000K 3000K 2700K



WL5180
 Name: Outdoor LED 1X10W Wall Light
 Power: 1X10W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White





Dimension: 170x100x192mm

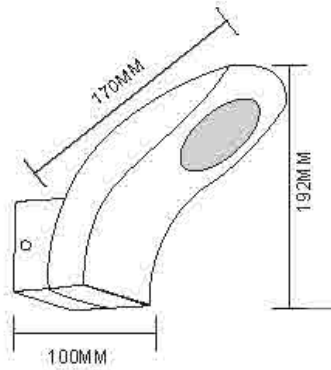

WL3015
 Name: Outdoor LED 3x3W Side Emitting Wall Light
 Power: 3x3W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White



Dimension: 205x160x45mm

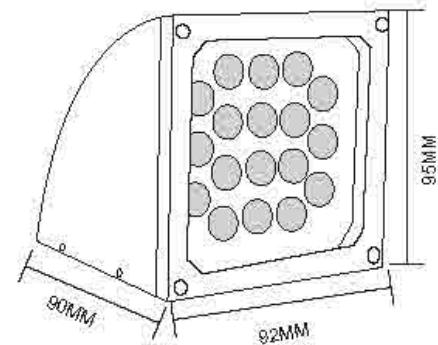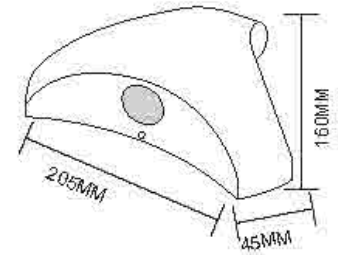

WL0120, WL0121, WL0122
 Name: Outdoor LED 5W/10W/15W Wall Light
 Power: 5W/10W/15W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White



Dimension: 5w/92x95x90mm, 10W/120x125x120mm, 15W/155x150x145mm




6000K 5000K 4000K 3000K 2700K



WL2020
Name: Outdoor LED 1x6W / 2x6W Wall Light
Power: 1x6W / 2x6W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 158x61x100mm

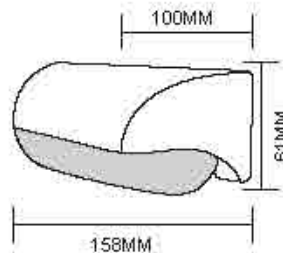

WL2021
Name: Outdoor LED 1x10W / 2x10W Wall Light
Power: 1x10W / 2x10W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 260x61x100mm

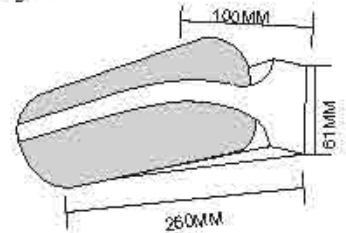

WL0126
Name: Outdoor LED 2X3W Wall Light
Power: 2X3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 100x80x160mm

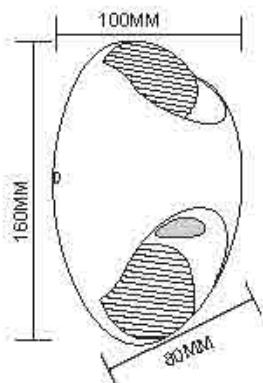

WL0127
Name: Outdoor LED 1X3W Wall Light
Power: 1X3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 100x60x150mm

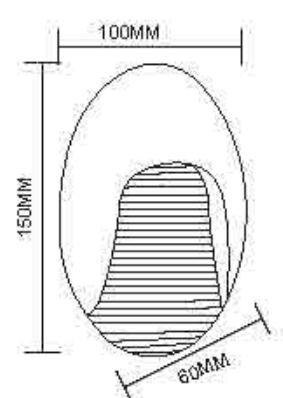


6000K 5000K 4000K 3000K 2700K



WL501
 Name: Outdoor LED 12W Wall Light
 Power: 12W Wall Light
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White




Dimension: Ø150xH50mm

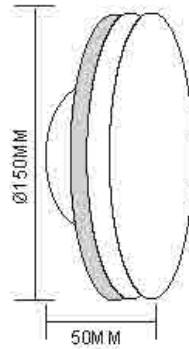

WL502
 Name: Outdoor LED 12W Wall Light
 Power: 12W Wall Light
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White




Dimension: 150x150xH50mm

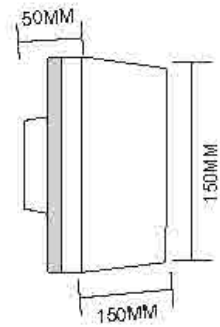

WL503
 Name: Outdoor LED 20W Wall Light
 Power: 20W Wall Light
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White




Dimension: 200x160x45mm

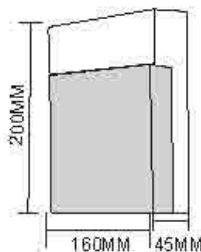


WL2019
 Name: Outdoor LED 1x7W /2x7W Wall Light
 Power: 1x7W /2x7W Wall Light
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White



Dimension: 148x130x65mm

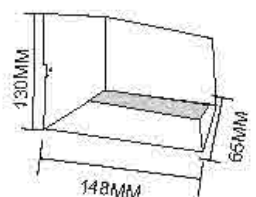

6000K 5000K 4000K 3000K 2700K

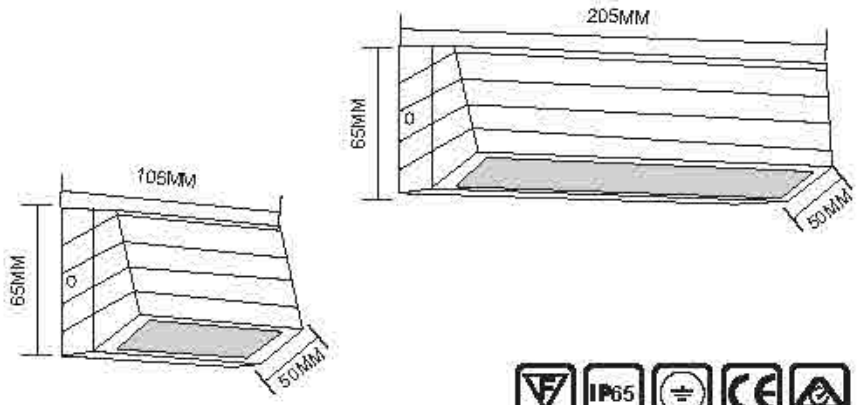


ST693, 694
 Name: Outdoor LED 6W /12W Wall Light
 Power: 6W /12W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White

 Dimension: 6W/105X65X60mm, 12W/205X65X50mm




6000K 5000K 4000K 3000K 2700K

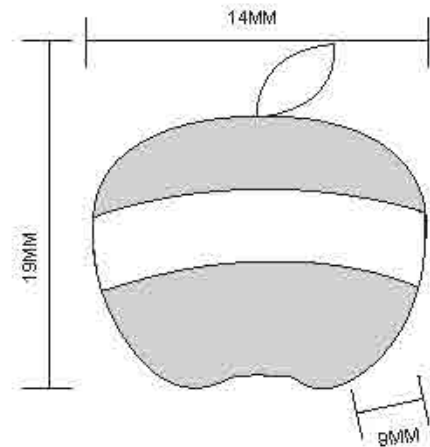

WL8803
 Name: Outdoor LED 12W Wall Light
 Power: 12W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White




Dimension: 16x9x14mm

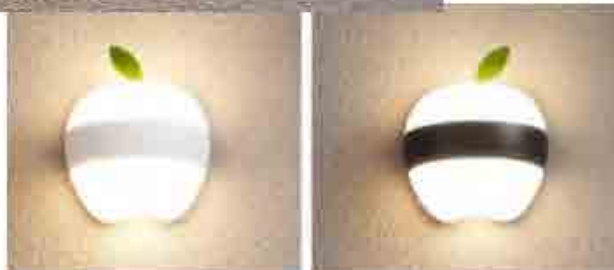

WL8805, WL8806, WL8807,
 Name: Outdoor LED 12W/18W/24W Wall Light
 Power: 12W/18W/24W
 Input voltage: 100-265V AC 50/60Hz
 CRI: >80
 Die casting Aluminum
 Class: I
 Color: Silver Grey/Dark Grey/Black/White



Dimension: 12W/70x65x155mm
 18W/70x65x220mm
 24W/70x65x370mm

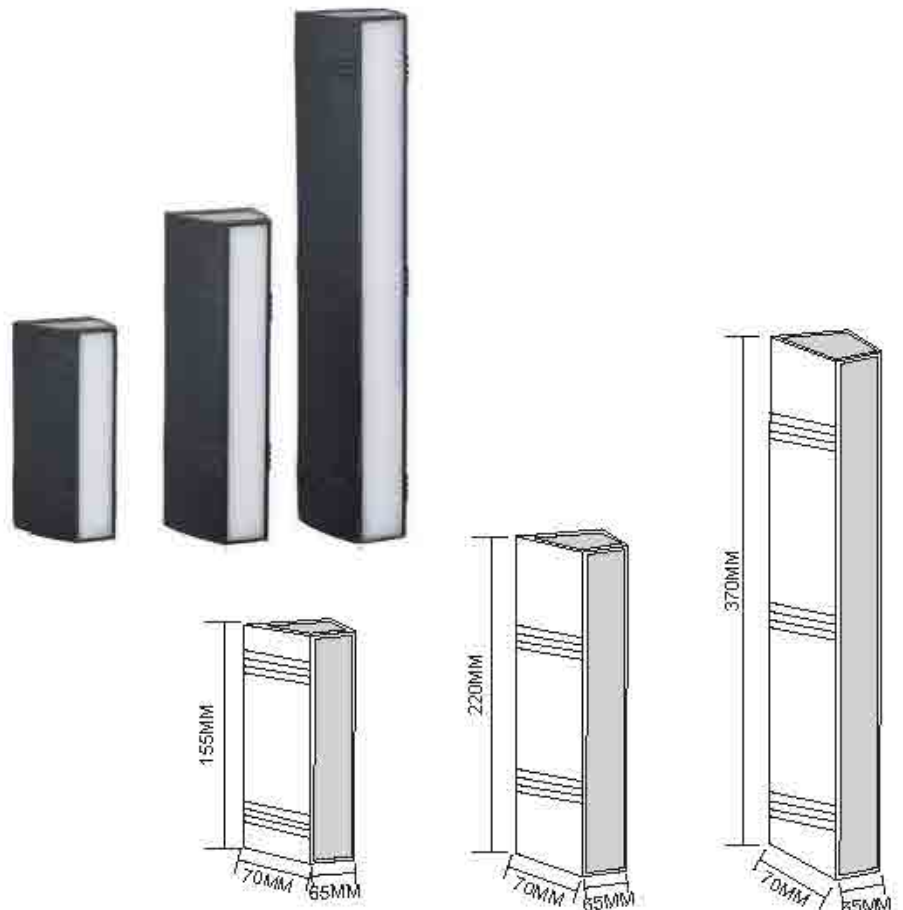


6000K 5000K 4000K 3000K 2700K



WL3001
Name: Outdoor LED 10W Wall Light
Power: 10W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 192x97x75mm

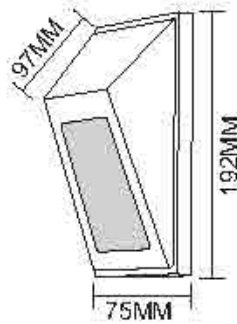

WL3002
Name: Outdoor LED 5W Wall Light
Power: 5W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 132x89x78mm

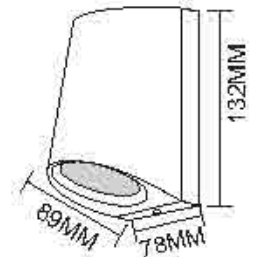

WL8003
Name: Outdoor LED 3W Wall Light
Power: 3W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 256x128x50mm

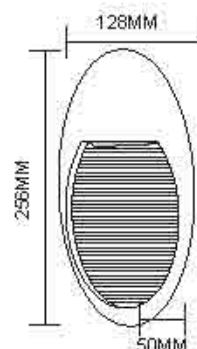

WL8004
Name: Outdoor LED 3W Wall Light
Power: 3W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 256x128x50mm

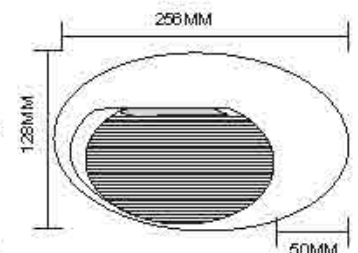


6000K 5000K 4000K 3000K 2700K



WL2011
Name: Outdoor LED 2x6W Wall Light
Power: 2x6W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 160x90x35mm

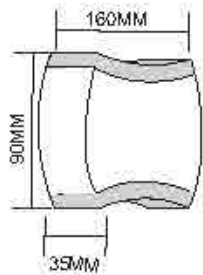

WL2012
Name: Outdoor LED 2x6W Wall Light
Power: 12x6W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: Ø160x35mm

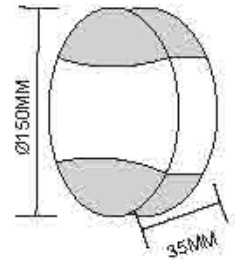

WL2017
Name: Outdoor LED 18W Wall Light
Power: 18W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: Ø200x45mm

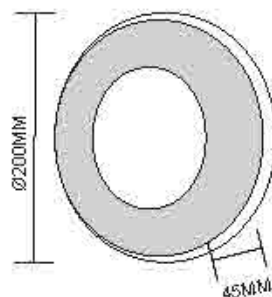

WL2018
Name: Outdoor LED 18W Wall Light
Power: 18W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 200x200x45mm

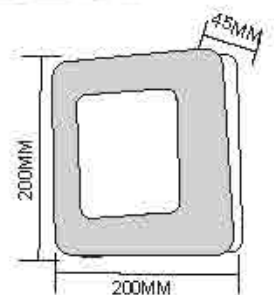


6000K 5000K 4000K 3000K 2700K




VL0124
Name: Outdoor LED COB 5W Wall Light
Power: 5W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

Dimension: 100x65x65mm

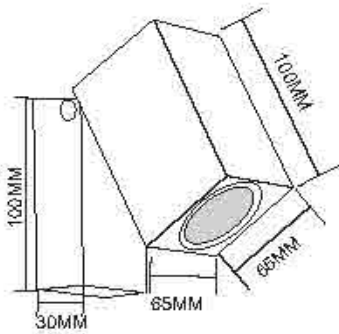


VL0125
Name: Outdoor LED 2X3W Wall Light
Power: 2X3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

Dimension: 55x85x170mm

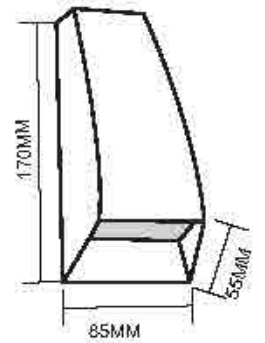


VL0128
Name: Outdoor LED 10W/24W Wall Light
Power: 10W/24W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

Dimension: 300x95x110mm

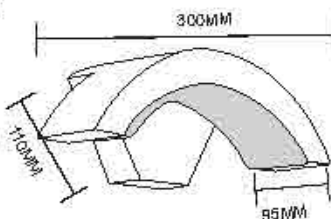

VL0128P
Name: Outdoor LED 10W/24W Wall Light
Power: 10W/24W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White

Dimension: 300x95x110mm Pole: H600mm

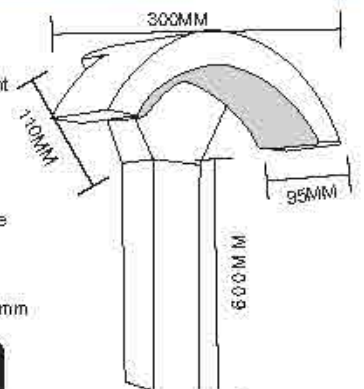


6000K 5000K 4000K 3000K 2700K



WL0120, WL0121
Name: Outdoor LED COB 2x3W Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 165x95x55mm

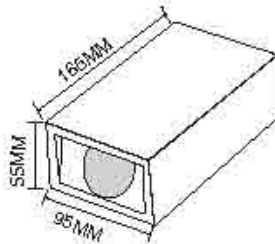

WL2881, WL2882, WL2883, WL2884
Name: Outdoor LED, 1x3W 2x3W, 3x3W, 4x3W Wall Light
Power: 1x3W 2x3W, 3x3W, 4x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: Ø95mm



WL6014, WL6015
Name: Outdoor LED 6W /12W Wall Light
Power: 6W /12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 6W/Ø117x33mm, 12W/Ø200x33mm

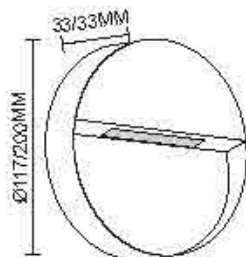

WL6016, WL6017
Name: Outdoor LED 6W /12W Wall Light
Power: 6W /12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 6W/117x117x33mm, 12W/200x200x33mm

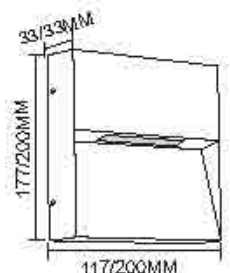


6000K 5000K 4000K 3000K 2700K



WL0116
Name: Outdoor LED COB 2x7W Wall Light
Power: 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 200x100x100mm

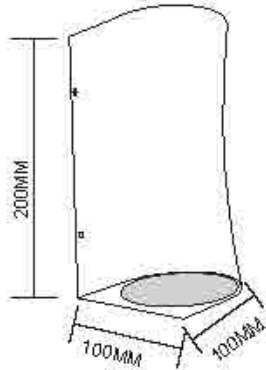


WL0114, WL0115
Name: Outdoor LED COB 1x7W/2x7W Wall Light
Power: 1x7W/2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 1X7W/100x100x100mm, 2x7W/200x100x100mm

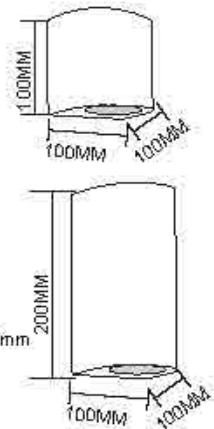

WL0117
Name: Outdoor LED COB 2x7W Wall Light
Power: 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 200x100x100mm

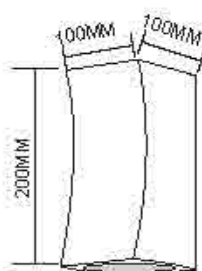

WL5110, WL5111, WL5112, WL5113
Name: Outdoor LED 2x3W/2x6W, 2X10W, 2X12W Wall Light
Power: 2x3W, 2x6W, 2X10W, 2X12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension:
2x3W, 115x90x35mm
2x6W, 175x90x35mm
2X10W, 300x90x35mm
2X12W, 400x90x35mm

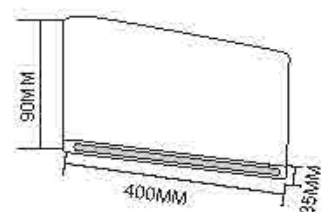


6000K 5000K 4000K 3000K 2700K



VL5016, 5017, 5018, 5019
Name: Outdoor LED 18W/E27 Wall Light
Power: 18W E27
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: Ø300mm

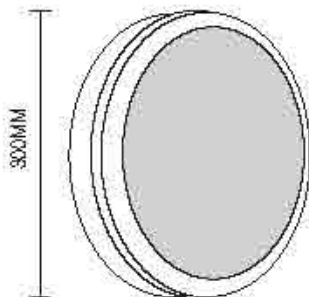


6000K 5000K 4000K 3000K 2700K



WL0715S, WL0715L
Name: Outdoor LED 10W/20W Wall Light
Power: 10W/20W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 10W/125x125x260mm, 20W/300x140x145mm

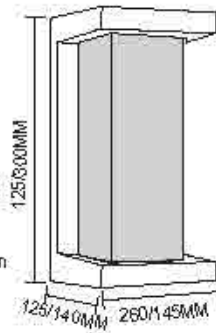

WL0716
Name: Outdoor LED 10W/E27 Wall Light
Power: 10W E27
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 115x115x250mm

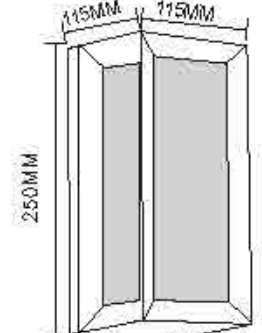

WL0717
Name: Outdoor LED 10W/20W/E27 Wall Light
Power: 10W/20W/E27
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 10W/260x125x125mm, 20W/300x140x145mm

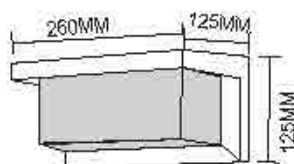

WL0718
Name: Outdoor LED 10W Wall Light
Power: 10W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 165x165x190mm

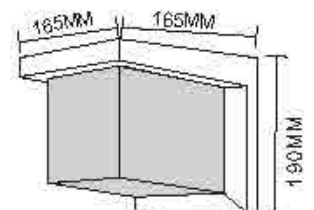


6000K 5000K 4000K 3000K 2700K



WL6011
Name: Outdoor LED 3W Wall Light
Power: 3x1W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 80x80x50mm

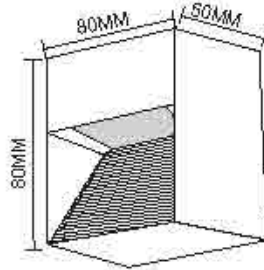

WL6012
Name: Outdoor LED 3W Wall Light
Power: 3x1W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White





Dimension: Ø160x95mm

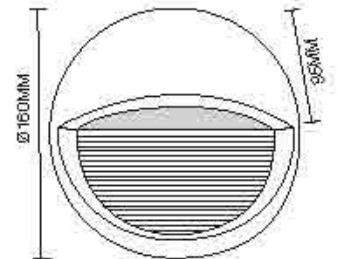

WL6013
Name: Outdoor LED 4W Wall Light
Power: 4x1W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 160x160x100mm

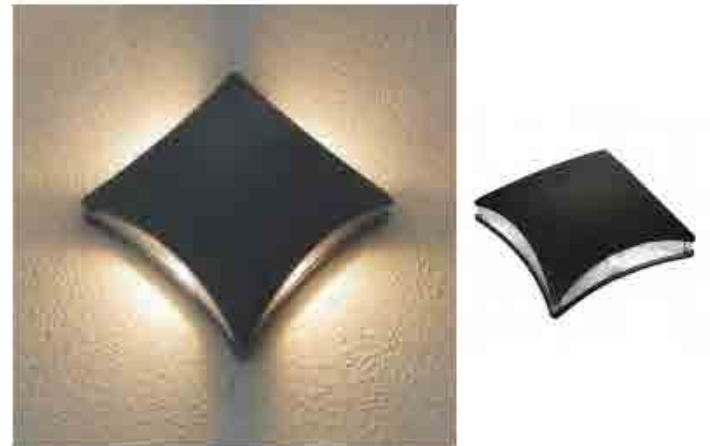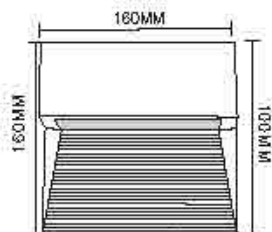

WL6019
Name: Outdoor LED 4x3W Wall Light
Power: 4x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 280x280x65mm

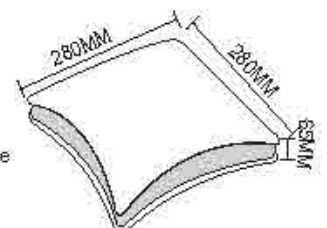


6000K 5000K 4000K 3000K 2700K




WL5055
Name: Outdoor LED 10W Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 260x127x70mm

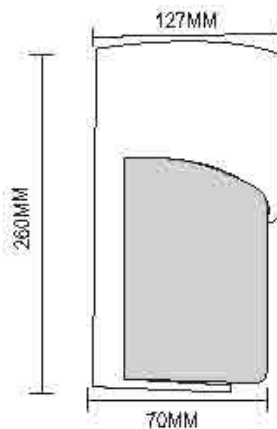


6000K 5000K 4000K 3000K 2700K

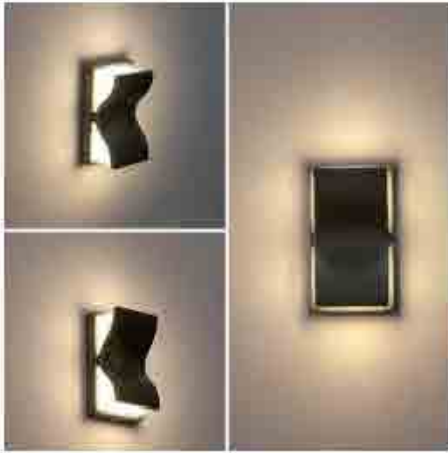

WL0863
Name: Outdoor LED 2x3W Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 80x65x140mm

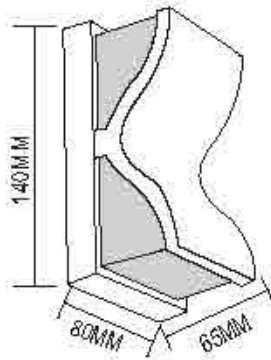

WL0861(1x3W), WL0862(3x1W)
Name: Outdoor LED 1x3W/3x1W Wall Light
Power: 1x3W/3x1W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: GA-WL0441/80x80x65mm, GA-WL0442/80x90x140mm

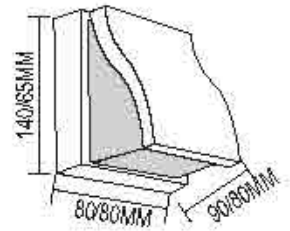

WL0618
Name: Outdoor LED 6W/12W/18W Wall Light
Power: 6W/12W/18W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 6W/155x88x55mm, 12W/215x115x70mm, 18W/160x260x80mm

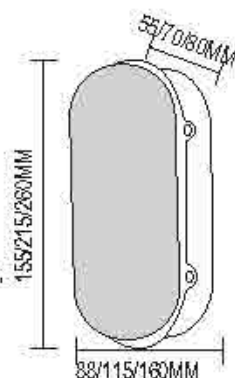



WL5078
Name: Outdoor LED 2x3W Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 140x80x65mm

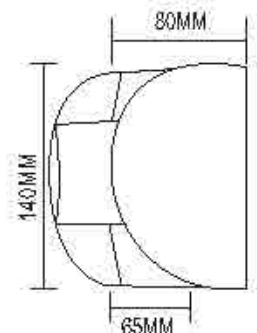

6000K 5000K 4000K 3000K 2700K

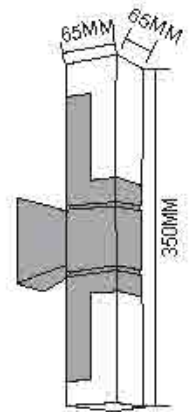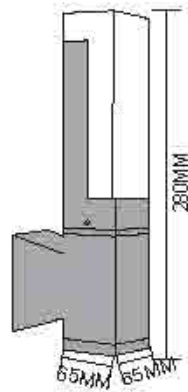


WL1900-1
Name: Outdoor LED 3W Up and Down Wall Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 65x65x280mm



WL1900-2
Name: Outdoor LED 2x3W Up and Down Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 65x65x350mm



WL8005F
Name: Outdoor LED 2x3W Up and Down Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 100x100x100mm

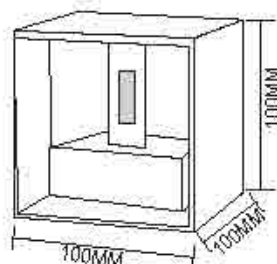

WL8005Y
Name: Outdoor LED 2x3W Up and Down Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 100x100x100mm




6000K 5000K 4000K 3000K 2700K



WL2105
Name: Outdoor LED 10W Wall Light
Power: 10W Wall Light
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: Ø145x60mm




WL0126
Name: Outdoor LED 2X3W Wall Light
Power: 2X3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 175x109x63mm

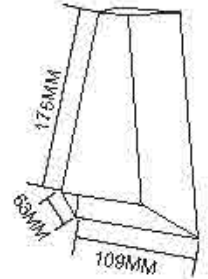

WL802
Name: Outdoor LED 2x7W Wall Light
Power: 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 240x130x47mm

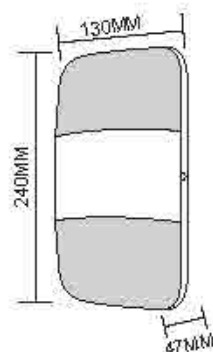

WL801
Name: Outdoor LED 1x7W Wall Light
Power: 2x7W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 165x130x47mm

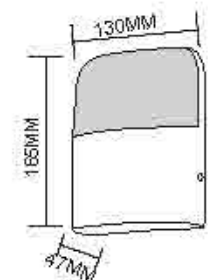



6000K 5000K 4000K 3000K 2700K



WL803, WL804
Name: Outdoor LED 7W /2x7W Wall Light
Power: 7W /2x7W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 7W/95x104x80mm, 2x7W/95x104x134mm

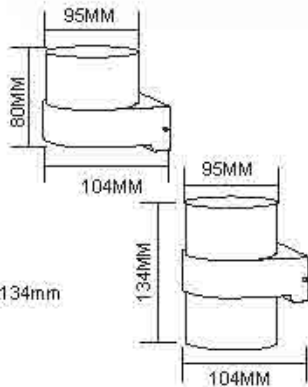

WL801, WL802
Name: Outdoor LED 7W /2x7W Wall Light
Power: 7W /2x7W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 7W/95x104x80mm, 2x7W/95x104x134mm

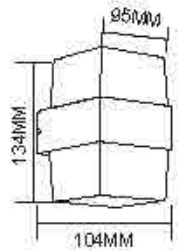

WL1170
Name: Outdoor LED COB 2x3W/2x10W/2x15W Wall Light
Power: 2x3W/2x10W/2x15W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 130/300/400mm

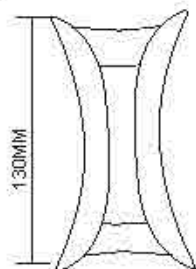


WL701, WL702, WL703, WL704
Name: Outdoor LED 18W Wall Light
Power: 18W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 196x160x59mm

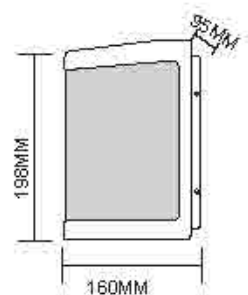


6000K 5000K 4000K 3000K 2700K

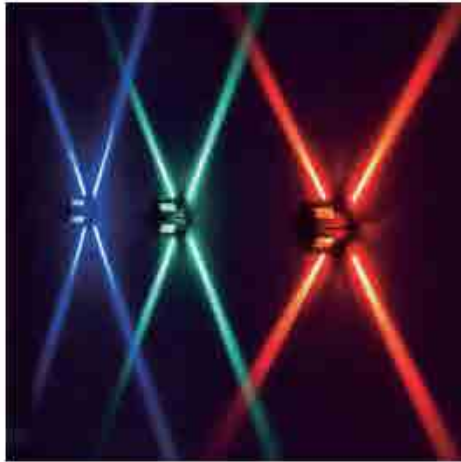

WL3007
Name: Outdoor LED 1x3W Side Emitting Wall Light
Power: 1x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 80x80mm

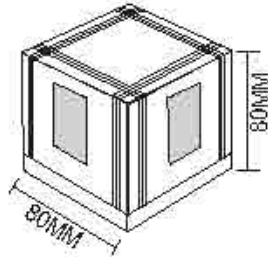


WL1008
Name: Outdoor LED 2x3W Wall Light
Power: 2x3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 145x98x55mm

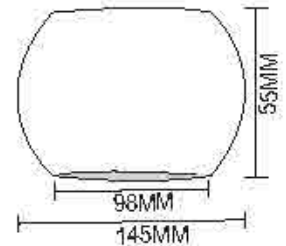

WL1047
Name: Outdoor LED 2x3W Up and Down Wall Light
Power: 2x3W GU10
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: φ65x180mm

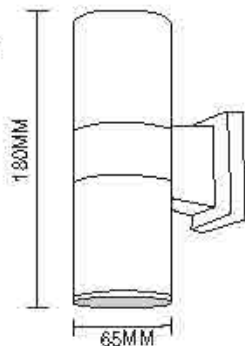

WL0708
Name: Outdoor LED 10W Wall Light/Windowtrick light
Power: 10W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: ∅120x170mm

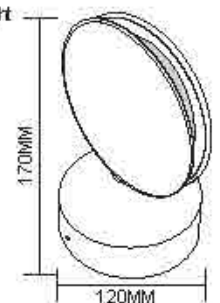

LED Lawn Light

06

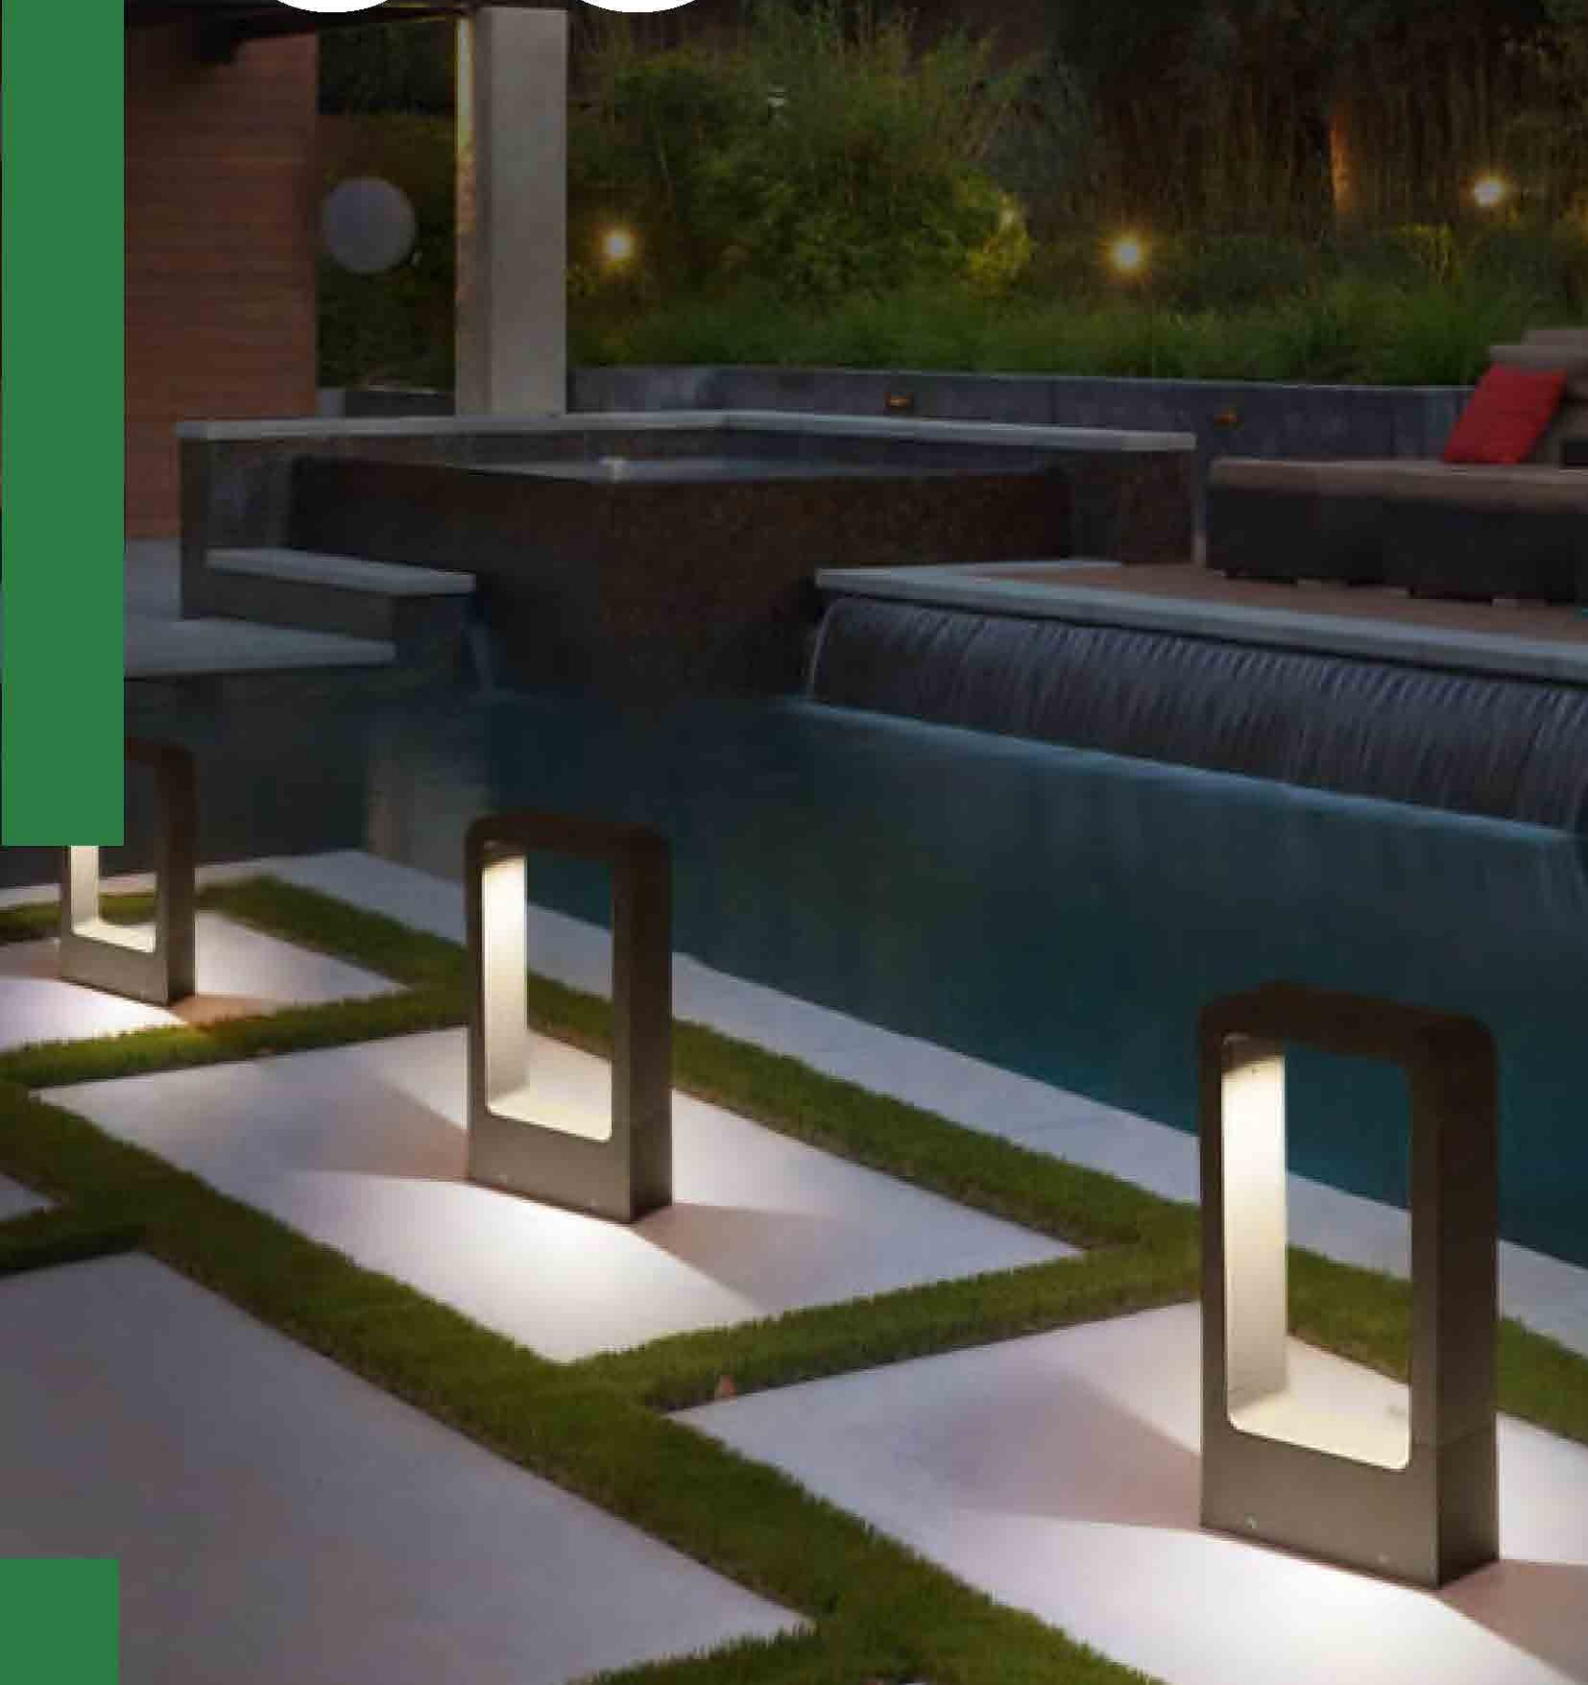




LD1207
Name: Outdoor LED 5W/10W/15W Lawn Light
Power: 5W/10W/15W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 5W/90x90mm, 10W/120x120mm, 15W/150x150mm
Height: 200/400/600/800mm

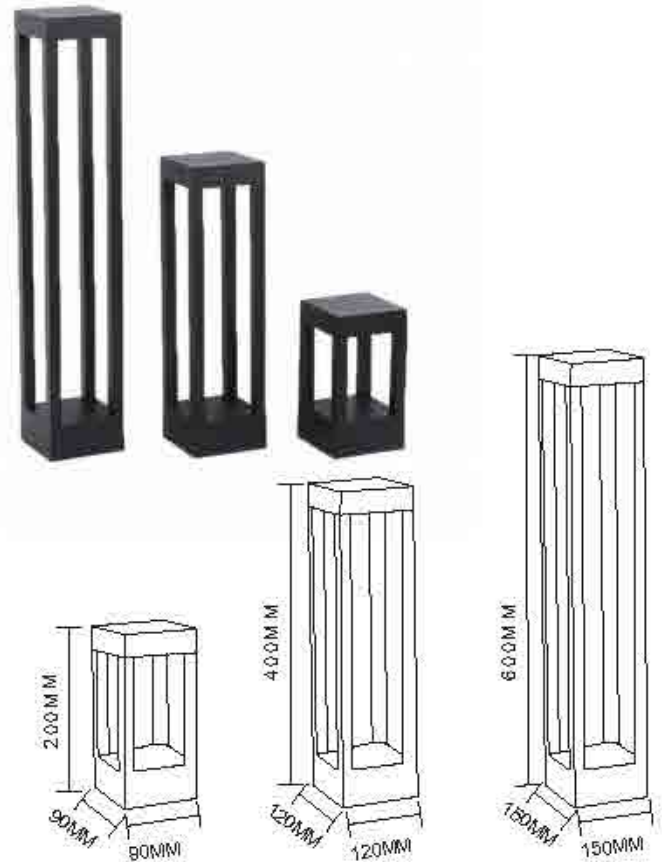

LD1208
Name: Outdoor LED 5W/10W/15W Lawn Light
Power: 5W/10W/15W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 5W/Ø90mm, 10W/Ø108mm, 15W/Ø145mm
Height: 400/600/800mm




6000K 5000K 4000K 3000K 2700K



LD1201
Name: Outdoor LED 10W Lawn Light
Power: 10W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White





Dimension: 162X57mm
Height: 200/400/600/800mm

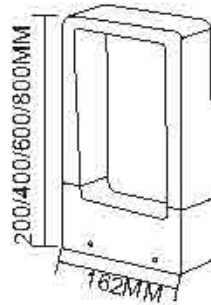

LD1201
Name: Outdoor LED 10W Lawn Light
Power: 10W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 162X57mm
Height: 200/400/600/800mm

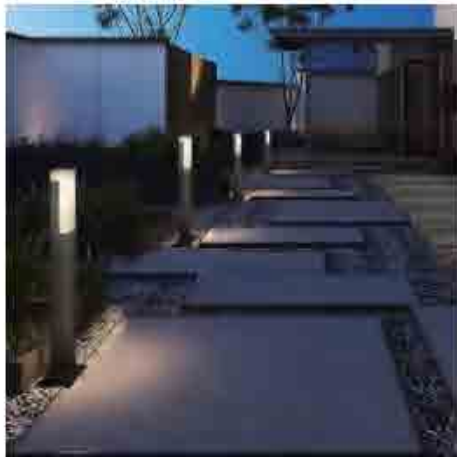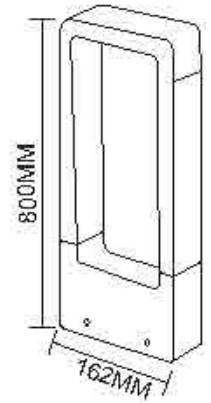

LD1205
Name: Outdoor LED 3W Lawn Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 65x65x600mm

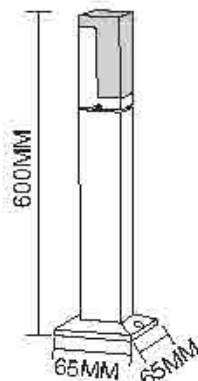

LD1206
Name: Outdoor LED 5W/10W/15W Lawn Light
Power: 5W/10W/15W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 5W/Ø90mm, 10W/Ø108mm, 15W/Ø145mm
Height: 200/400/600/800mm

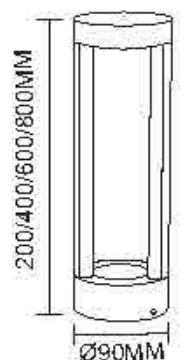




6000K 5000K 4000K 3000K 2700K

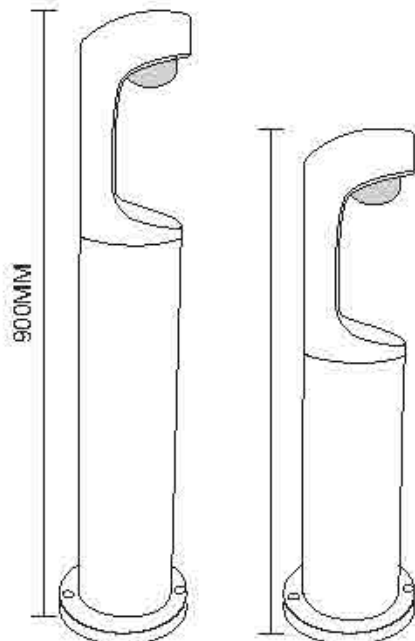

LD1209
Name: Outdoor LED 10W Lawn Light
Power: 10W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 190x900mm




6000K 5000K 4000K 3000K 2700K



BL1001, BL1002
Name: Outdoor LED 7W/12W Bollard Light
Power: 7W/12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 7W/Ø133x100mm, 12W/Ø160x130mm

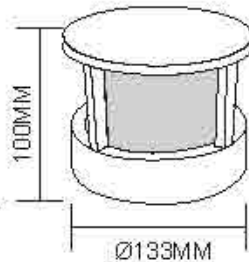

BL1003, BL1004
Name: Outdoor LED 7W/12W Bollard Light
Power: 7W/12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 7W/Ø133x90mm, 12W/Ø160x120mm

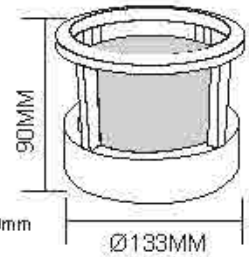

BL1005, BL1006
Name: Outdoor LED 7W/12W Bollard Light
Power: 7W/12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White




Dimension: 7W/133x133x100mm, 12W/160x160x130mm

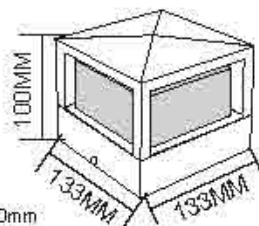

BL1007, BL1008
Name: Outdoor LED 7W/12W Bollard Light
Power: 7W/12W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 7W/133x133x90mm, 12W/160x160x120mm

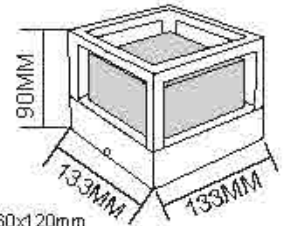

07


LED Indoor Step Light



6000K 5000K 4000K 3000K 2700K

CREE EAGLE ESE I

ST01-A

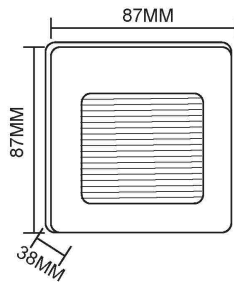


Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 87x87x38mm
Cutout:73*73*H80mm



ST01-B

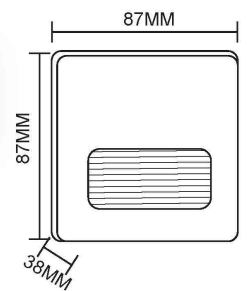



Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 87x87x38mm
Cutout:73*73*H80mm



ST01-C

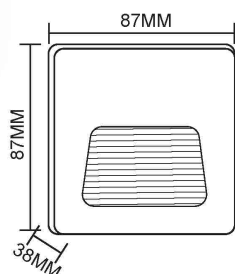



Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 87x87x38mm
Cutout:73*73*H80mm



ST01-D

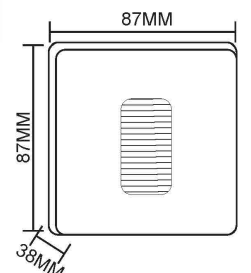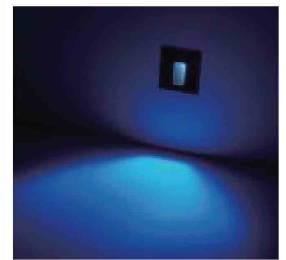

Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White




Dimension: 87x87x38mm
Cutout:73*73*H80mm



6000K 5000K 4000K 3000K 2700K

CREE EAGLE EYE I


ST01-E

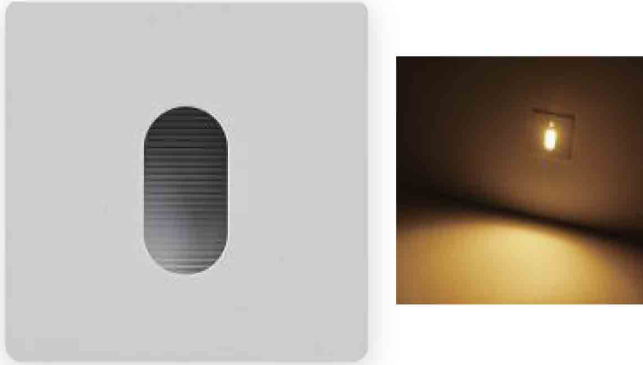


Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 87x87x38mm
Cutout: 73*73*H80mm

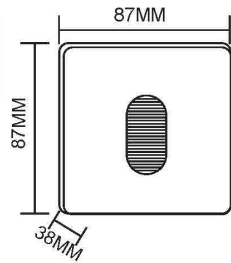


ST01-F

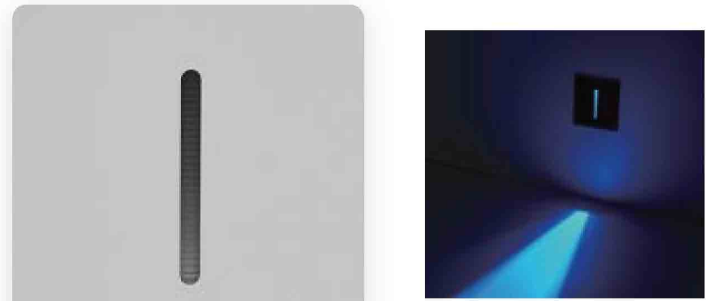


Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 87x87x38mm
Cutout: 73*73*H80mm

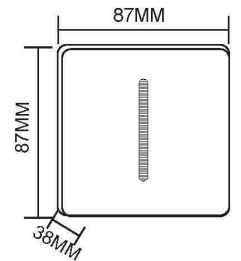


ST01-FR

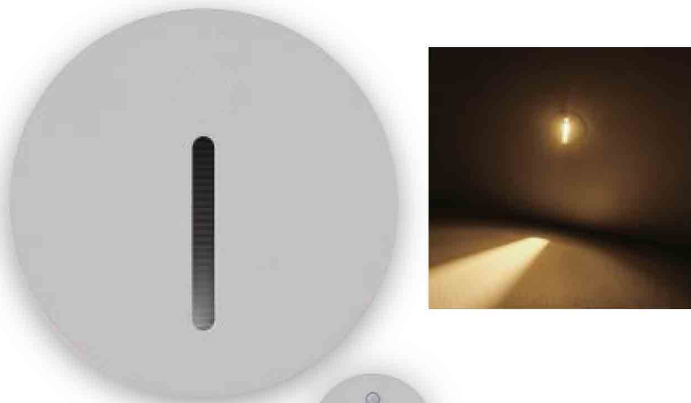

Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: Ø87x38mm
Cutout: Ø43x71x55mm

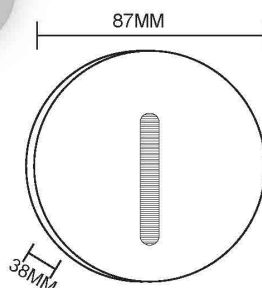


ST02-A



Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Aluminum
Color: Silver Grey/Dark Grey/Black/White





Dimension: 87x35x38mm
Cutout: 32x70x45mm

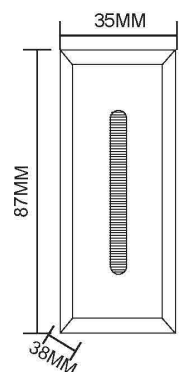



ST02-C

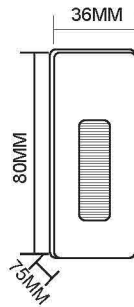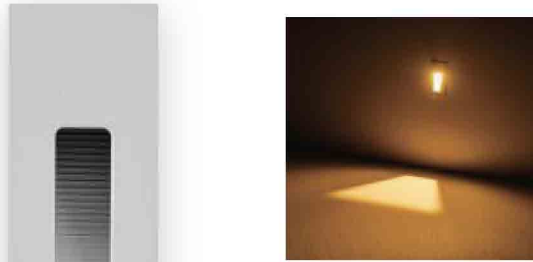


Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 75x36x80mm
Cutout: 32x70x45mm



ST02-D

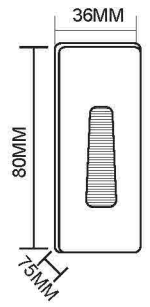



Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 75x36x80mm
Cutout: 32x70x45mm





ST03-A

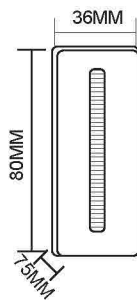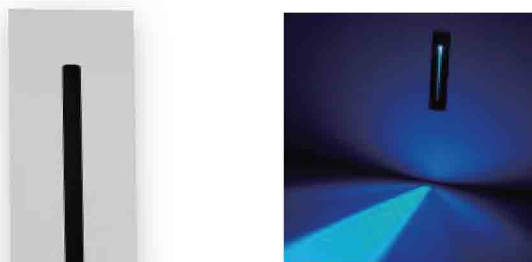

Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: 75x36x80mm
Cutout: 32x70x45mm

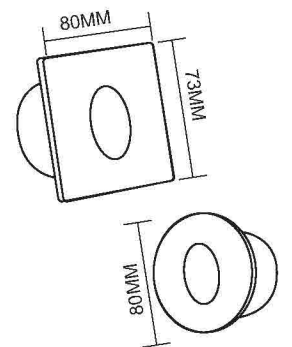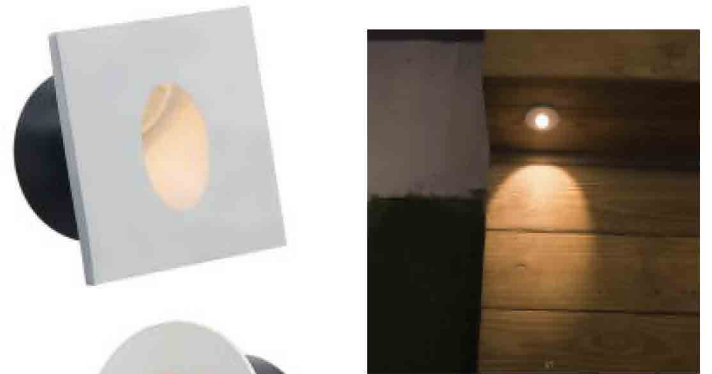

WL0803R, WL0803S
Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI:>80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: Ø80*H73mm, 80*80*73mm
Cutout: Ø75mm










BS010R, BS010S
Name: Indoor LED 3W Step Light
Power: 3W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Aluminum
Color: Silver Grey/Dark Grey/Black/White



Dimension: $\varnothing 115\text{mm}$, $115 \times 115\text{mm}$
Cutout: $\varnothing 80 \times 76\text{mm}$, $80 \times 80 \times 76\text{mm}$

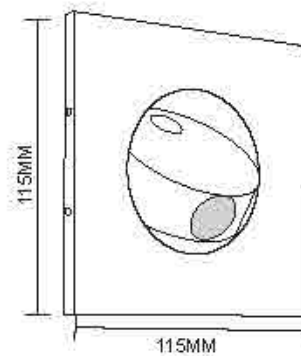

6000K 5000K 4000K 3000K 2700K

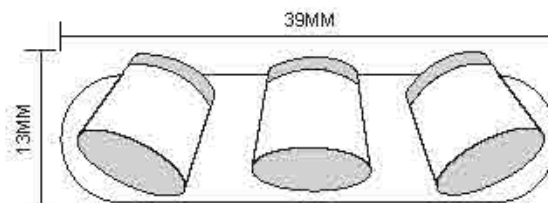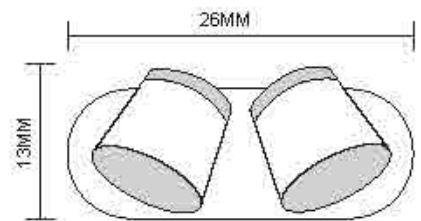


WL9801, WL9802, WL9803,
Name: Outdoor LED 5W/10W/15W Wall Light
Power: 5W/10W/15W
Input voltage: 100-265V AC 50/60Hz
CRI: >80
Die casting Aluminum
Class: I
Color: Silver Grey/Dark Grey/Black/White



Dimension: 5W/13mm×13mm
10W/26mm×13mm
15W/39mm×13mm



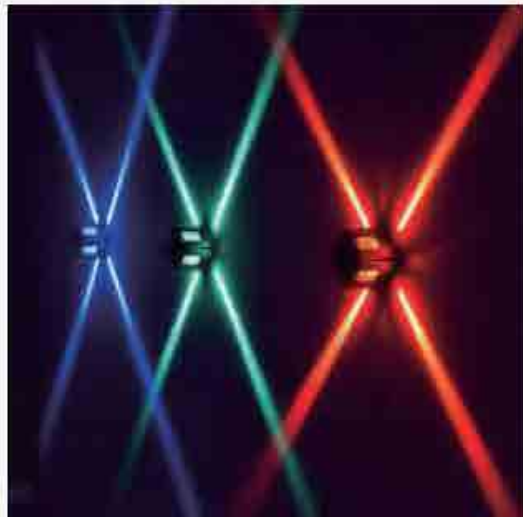

Phone : +370 600 93111

E-mail : info@ledesta.eu

www.ledesta.eu