



## **SPECIFICATION**

---

### **Hunter High Bay**

## Product Details



## Application

- Workshop
- Exhibition Hall
- Logistic Center
- Gym
- Warehouse
- Mine Field

## Features

- 0~10V Dimmable available
- Ultra Bright, 150lm/w
- 110° Beam Angle
- Up to 18,750 Lumens
- 2', 3', and 4' Lengths
- 5-Year Manufacturer's Limited Warranty


## Temperature

Operating : 0°C ~ +40°C

Storage: -20 °C ~ +70°C



## Dimension

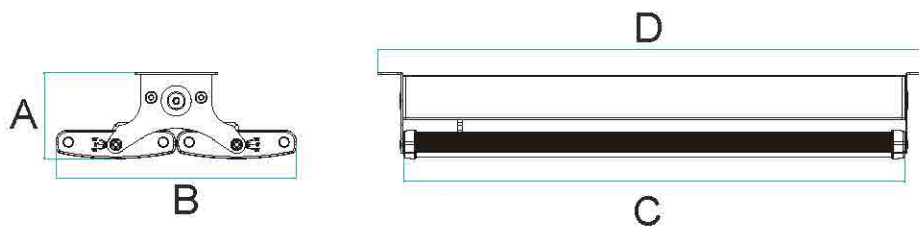

Dimension(mm)	A(mm)	B(mm)	C(mm)	D(mm)
600	103	289	602	662
900	103	289	902	962
1200	103	289	1202	1262

## Technical Data sheet


Article Number	Size	Power	LEDs	Beam Angle	CRI	AC Input	DC Output	Efficiency (±5%)	Lumen Output
<b>With striped cover</b>									
Hunter High Bay 2ft 100W	602*289*103mm	100W	624	110°	>80	200~240V/100~277V	30~40V	140~150lm/w	14000~15000lm
Hunter High Bay 3ft 150W	902*289*103mm	150W	936	110°	>80	200~240V/100~277V	30~40V	140~150lm/w	21000~22500lm
Hunter High Bay 4ft 200W	1202*289*103mm	200W	1248	110°	>80	200~240V/100~277V	30~40V	140~150lm/w	28000~30000lm
<b>With frosted cover</b>									
Hunter High Bay 2ft 100W	602*289*103mm	100W	624	120°	>80	200~240V/100~277V	30~40V	100~120lm/w	10000~12000lm
Hunter High Bay 3ft 150W	902*289*103mm	150W	936	120°	>80	200~240V/100~277V	30~40V	100~120lm/w	15000~18000lm
Hunter High Bay 4ft 200W	1202*289*103mm	200W	1248	120°	>80	200~240V/100~277V	30~40V	100~120lm/w	20000~24000lm

## Packing information


Dimension	Carton Size	N.W./Pieces	G.W./Carton	Pieces/Carton	Maximum Loading of		
					20'GP	40'GP	40'HQ
600mm	720x240x220mm	3KG	3.6KG	1	648pcs	1350pcs	1466pcs
900mm	1020x240x220mm	7KG	7.5KG	1	480pcs	1000pcs	1200pcs
1200mm	1320x240x220mm	11KG	12KG	1	324pcs	729pcs	900pcs

## Adjustable Angle



0°



45°



90°

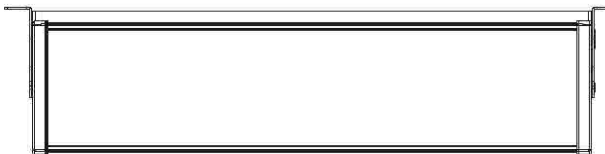

## Installation

Surface mount



Suspend mount

