



INDUSTRIAL LUMINAIRES


ZORO series

Easy assembly/ Convenient to Replace PCB & Driver/Suitable for SKD Import

Patent design



CODE	LED LINE HQ -L-600-20	LED LINE HQ -L-1200-40	LED LINE HQ -L-1500-56
CCT	4000K (standart) / 3000K 5000K 6000K (optional)		
Working temperature	-20°C -- +40°C		
CRI	Ra≥80		
Power	20 W	40 W	55 W
Lumen	3000 lm	6000 lm	8400 lm
Weight, kg	0.58	1.15	1.46
Size, mm	646x67x65	1246x67x65	1546x67x65
Power factor	0.9		
Light efficiency	130lm/W; 150lm/W or 170 lm/W		
IP grade / IK	IP66 / IK08		
Beam angle	120°		
Dim/EM	0/1-10V dimmable, DALI dimmable / Emergency module 1h (optional)		
Lifespan	L80B10 50000 h (Ts-25 °C)		
Driver / LEDs	Lifud/Boke/Osram; Sanan/Epistar/Bridgelux		
Materials	Plastic with aluminium inside		

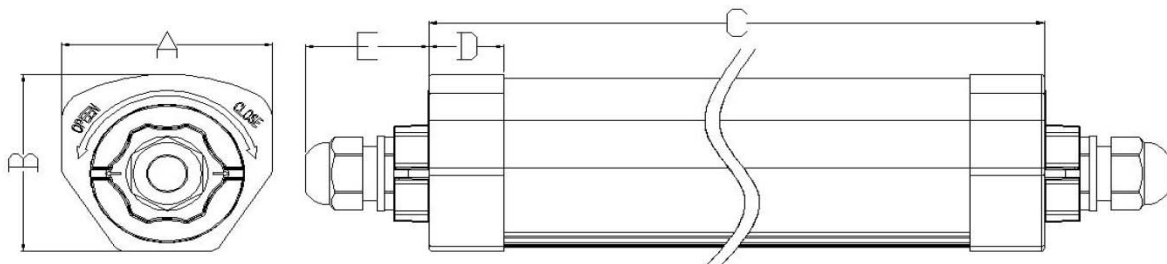

Item	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Tolerance
ZORO-L600-20W	67	65	600	25	46	± 3
ZORO-L1200-40W	67	65	1200	25	46	± 3
ZORO-L1500-56W	67	65	1500	25	46	± 3